



Multi-tenant Data Center System Selection Guide

For use in CALA

COMMSCOPE®





INTRODUCTION

Turn your multi-tenant data center (colocation) infrastructure into a competitive advantage

The multi-tenant data center (MTDC) arena is not for the faint of heart. Growth is explosive, the pace of change frenetic, and competition fierce. Driven by the growth of edge-based connectivity and new partnerships with hyperscale and cloud providers, the global colocation and wholesale market is projected to exceed \$54 billion in revenue by 2023, compared to \$38.2 billion in 2018.¹

To compete successfully, MTDC owners and network managers need to be quick to market, globally agile and able to scale on demand. It all comes down to having a physical layer infrastructure designed for fast deployment, simplified management and flexible growth.

The fiber-dense connectivity customers want—the scalability and support you need

Today's colocation and wholesale tenants are running faster, more demanding applications than ever before. They look to you for a fiber-dense backbone and flexible connectivity. That's why some of the world's largest MTDC providers look to CommScope.

With a world-leading portfolio of carrier-grade fiber connectivity and management solutions for the backbone and copper and fiber structured cabling solutions, we help you manage the exponential growth in your MTDC. From entrance facilities and cross-connects to the meet-me rooms and customer cages, CommScope supports the fiber-dense applications and migration agility you and your customers depend on.

Connections beyond the obvious

We also keep you connected in other ways. Our powered fiber cabling solution remotely connects and powers a wide range of IP devices, nodes and sensors, while the FiberGuide® optical raceway solution connects, manages, distributes and protects your fiber plant across all areas of the data center. With CommScope's global manufacturing network and CommScope Express expedited delivery service, the world's most advanced fiber and copper connectivity solutions are never more than a week away from their final destination. So, you can satisfy your most demanding customers, wherever they are.

For MTDCs, future success starts with an adaptable, powerful and streamlined infrastructure. CommScope turns yours into a compelling and competitive advantage. Read on to learn how.

To compete successfully, MTDC owners and network managers need to be quick to market, globally agile and able to scale on demand.

¹ Global Colocation and Wholesale Datacenter Market to Exceed \$54 Billion by 2023; 451 Research; April 25, 2019.



Direct System Selection

Fiber Splice Systems	4
Fiber Entrance Cabinet (FEC)	5
Fiber Entrance Cabinet (FEC) System Selection	6
Fiber Entrance Cabinet (FEC) Products	7
FACT® Optical Distribution Frame (ODF)	8
FACT® Optical Distribution Frame (ODF) Modular Design	9
FACT® Optical Distribution Frame (ODF) Products	10
Universal Mount Splice Cabinet (UMSC)	13
Universal Mount Splice Cabinet (UMSC) System Selection	14
Universal Mount Splice Cabinet (UMSC) Products	15
Flex Frame ODF and 19-in. Propel Panels	16
Flex Frame System Selection	17
Flex Frame Products	18
FOSC® 600 Series	19
FOSC® 600 Series System Selection and Products	20
19-in. Splice Solutions	21
19-in. Splice Solutions System Selection	21
Modular Front Patching System (MFPS) Panel	22
19-in. Splice Solutions Products	23
Singlemode High Fiber Count Bulk Cables	25
Rollable Ribbon Fiber Solutions	26
Rollable Ribbon Fiber Technology	27
Singlemode Rollable Ribbon and Stranded Fiber Cables	28
Singlemode Patch Cord and Cable Management Products	30
Pre-terminated Fiber Systems	31
Pre-terminated 19-in. Fiber	32
Pre-terminated 19-in. Fiber System Selection	32
Pre-terminated 19-in. Fiber System Products	33
Pre-terminated 19-in. Fiber System Cable Assemblies	35

Pre-terminated FACT ODF Fiber	40
Pre-terminated FACT ODF Fiber System Selection	40
Pre-terminated FACT ODF Fiber System Products	41
Pre-terminated FACT ODF Fiber System Cable Assemblies	42
FiberGuide® Raceway Systems	46
Category 6A Systems	50
Powered Fiber Systems	52
DIN Rail Solutions for BMS Networks	55
Fiber Wall Boxes for Fiber Entrance Applications	58
2 Post Equipment Racks and Accessories	60
CommScope's imVision® Platform	62
Colocation Campus and Building Infrastructure	64
Fiber Entrance and Meet-Me Room	66
High Fiber Count DC Interconnect	67
Campus Cabling	68
Building Cabling	69
IDF to Customer Cage (FACT ODF)	70
IDF to Customer Cage (19-in. Cabinet)	71
Campus Cabling for Wi-Fi and Security	72
Customer Space Cabling Infrastructure	73
Main Distribution Area (MDA) Fiber	75
Equipment Distribution Area (EDA) Fiber and Copper	76
FiberGuide Raceway Systems	78
Reference Designs and Technical Information	79



Fiber Splice Systems

Fiber Entrance Cabinet (FEC)

FACT® Optical Distribution Frame (ODF)

Universal Mount Splice Cabinet (UMSC)

Flex Frame ODF and 19-in. Propel Panels

FOSC® 600 Series

19-in. Splice Solutions

Singlemode Fiber Cables

Singlemode Patch Cord and Cable Management Products



The FEC is designed for applications requiring an interface for Intra Facility Cable (IFC) and Outside Plant (OSP) cable. The FEC provides storage and protection in addition to splicing.

The conventional splice drawer employed in the FEC provides service loop storage, which allows splicing away from the FEC. Cable access ports are located at the top, bottom, and both sides of the cabinet. Pre-formed rubber grommets are provided in each cable access port. The grommets have micro slits that can be easily cut out to match cable diameter. Each grommet can handle up to three cables.

The FEC range from CommScope comes in a number of different sizes, providing splicing, administration and storage for IFC and OSP cables. It offers a cost-effective, space-saving alternative to splicing on the fiber frame. Cabinets are designed for deployment in a building equipment area. Bend radius protection and discrete subunit routing paths ensure easy installation. Can deploy high count of stranded or ribbon fiber cables. Ultra high-density splice capacity is dependent on splice tray used.



10,356 mass fusion splice capacity, wall-mounted splice cabinet, saves data center floor space

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure


MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Select a product for more information.

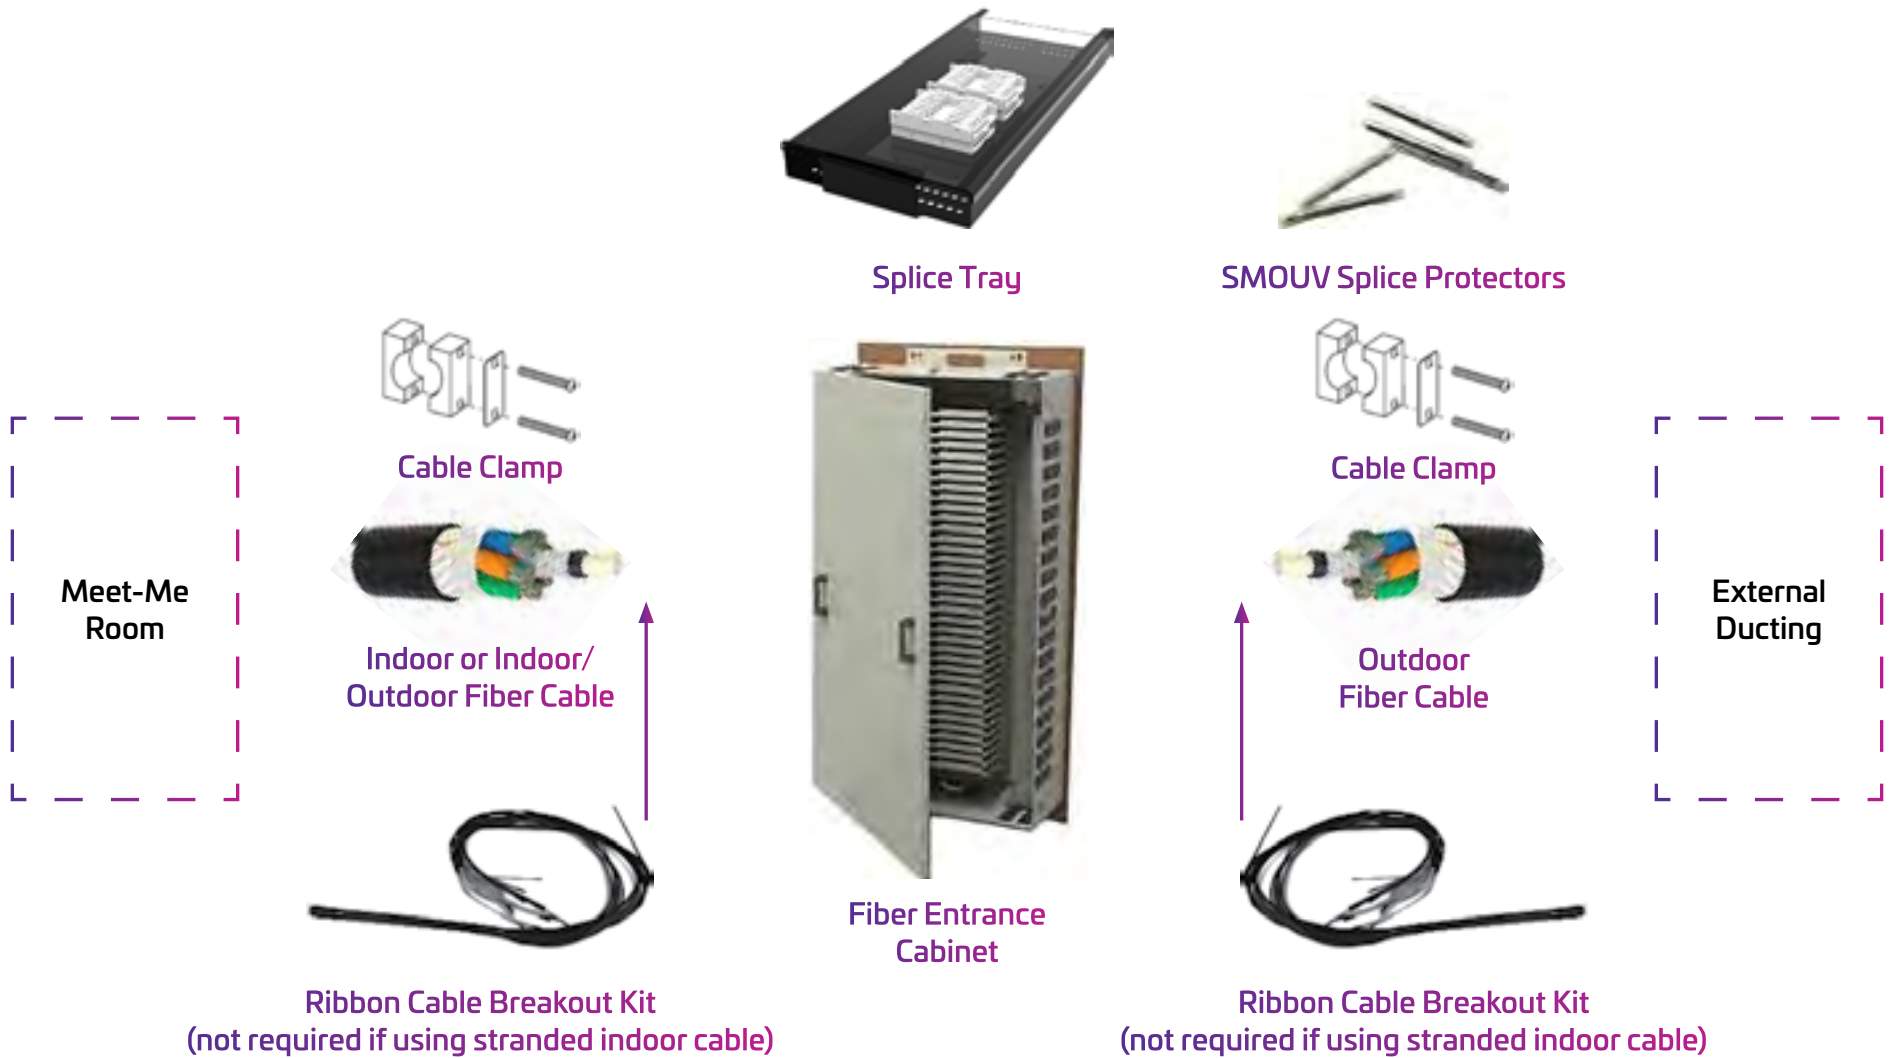

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Review Fiber Entrance Cabinet (FEC) System Selection here.

Wall-mounted Fiber Entrance Closure (FEC), Splice Trays Not Included	Dimensions	Total Number of Splices	Number of Drawers	Weight	Max Cable OD	Part Number
Fiber Optic Entrance Cabinet, 36 Drawers, Wall mounted	62 in. (1,574.8 mm) x 32 in. (812.8 mm) x 13 in. (330.2 mm)	10,368	36	160 lbs (72.6 kg)	0.30 in. – 1.2 in. (7.6 mm – 30.5 mm)	FEC-36
Fiber Optic Entrance Cabinet, 24 Drawers, Wall mounted	45 in. (1,143 mm) x 32 in. (812.8 mm) x 13 in. (330.2 mm)	6,912	24	120 lbs (54.4 kg)	0.30 in. – 1.2 in. (7.6 mm – 30.5 mm)	FEC-24
Fiber Optic Entrance Cabinet, 12 Drawers, Wall mounted	28 in. (711.2 mm) x 32 in. (812.8 mm) x 13 in. (330.2 mm)	3,456	12	80 lbs (36.3 kg)	0.30 in. – 1.2 in. (7.6 mm – 30.5 mm)	FEC-12
Fiber Optic Entrance Cabinet, 6 Drawers, Wall mounted	19.48 in. (494.79 mm) x 32 in. (812.8 mm) x 13 in. (330.2 mm)	1,728	6	50 lbs (22.7 kg)	0.30 in. – 1.2 in. (7.6 mm – 30.5 mm)	FEC-6

Splicing Accessories	Fiber Count	Breakout Length	Description Code	Part Number
Fiber Optic Splice Tray, 288 Ribbon Splice Capacity	288			FST-XD-MT
Fiber Optic Splice Tray, 48 splice capacity, for stranded fiber use	48			FST-HS-48
SMOUV Fiber Optic Splice Heat Shrink Protective Sleeve for 12 ribbons (Part Number = 1ea Sleeve. MOQ is 1,000 Sleeves)	12 ribbon fibers per sleeve		SMOUV-1120-R2/12-02	757849-000
Fiber Optic Protective Splice Sleeve, 1 package, for stranded fiber use (Part Number = 50 Sleeves in Package. MOQ is 50 Packages)				FST-ACC001
Breakout kit used across multiple applications (FEC, FLEX, OMX, SD cable counts 144F, 288F, 432F, 576F)	144/288/432/576	50 in	RIBCBOU-3/8-50-144/288/432/576	760244150
Breakout kit used across multiple applications (FEC, FLEX, SD)	864/1152	50 in	RIBCBOU-3/8-50-864/1152	760244144
Breakout kit used across multiple applications (FEC, FLEX, SD)	1728	75 in	RIBCBOU-3/8-75-1728	760244149
Breakout kit used across multiple applications (FEC, FLEX)	3456	125 in	RIBCBOU-3/8-125-3456	760244147

Cable Clamping Kits	Quantity			Part Number
IFC/OSP Cable clamp kit. Secures 3 cables with a maximum diameter each of 32 mm (1.25 in) to 38 mm (1.5 in), to a single entry point	6			OSP-CLPFEC-XL
IFC/OSP Cable clamp kit. Secures 3 cables with a maximum diameter each of 32 mm (1.25 in) to 38 mm (1.5 in), to a single entry point	1			OSP-CLPFEC-XL-1
IFC/OSP Cable clamp kit. Secures 3 cables with a maximum diameter each of 10 mm (0.4 in) to 30 mm (1.2 in), to a single entry point	3			OSP-CLPFEC-LG
IFC/OSP Cable clamp kit. Secures 1 cable with a maximum diameter of 10 mm (0.4 in) to 30 mm (1.2 in), to a single entry point	1			FEC-ACCCLMP01
Soft IFC fiber optic cable clamp kit. Secures 1 cable with a maximum diameter of 20 mm (0.8 in) to 28 mm (1.1 in), to a single entry point	1			OSP-CLPSST-IFCL
IFC/OSP Cable clamp kit. Secures 3 cables with a maximum diameter each of 5 mm (0.2 in) to 18 mm (0.7 in), to a single entry point	3			OSP-CLPFEC
IFC/OSP Cable clamp kit. Secures 1 cable with a maximum diameter of 5 mm (0.2 in) to 18 mm (0.7 in), to a single entry point	1			OSP-CLPSST
Soft IFC fiber optic cable clamp kit. Secures 1 cable with a maximum diameter of 5 mm (0.2 in) to 18 mm (0.7 in), to a single entry point	1			OSP-CLPSST-IFCS

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
---------------------	--------------------------	----------------------	--	--------------------------	---	---	--	---------------------------------------	---	----------------------------	------------------------------------	-------------------------------	------------------------------------	----------------------------------	--	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
--	--	--------------------------------	----------------------------------	---

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
---------------------------	---------------------------	----------------------------	------------------------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-----------------------------	--	--	--------------------------	----------------------------	---------------------



Frame

The FACT optical distribution frame solution begins with CommScope’s modular, lightweight FACT frame. Designed modularly with a small footprint, the fully front accessible FACT frame can be placed up against a wall, or back-to-back in a quad formation to maximize usable density. The frame provides dedicated spots for cable routing and color-coded fiber management, supporting up to 2,880 LC connections in a single frame.

The cross-connect FACT frame can be designed and easily installed with cable routing on either side of the frame, which includes backplate numbering—allowing for simple tracking of fibers whether you route from top to bottom or vice versa. One standard patch cord length can reach any position in a back-to-back configuration, reducing the number of cable lengths required.

The FACT frame accommodates not only FACT shelving, but standard 19-in. shelving as well, allowing you to increase your density while utilizing your current equipment. The FACT

frame is compatible with a range of accessories such as side panels, doors and cable attachment plates.

Elements and chassis

FACT elements may be deployed individually as a single-element chassis or grouped with other elements for higher density solutions. Each element measures 30.95 mm (1.22 in) tall, 30 percent less than the standard HU (44.45 mm/1.75 in). Each element supports two hinged trays that provide full front access to both sides of all connections and clear visibility of all ports. Four chassis types—patch-only, patch-splice, pre-cabled and NG4—enable customization of the FACT optical distribution frame to support virtually any application.



Learn more about the FACT High Density ODF Solution here.

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Select a product for more information.



FACT Optical Distribution Frame



FACT Splice Chassis



FACT Splice/Patch Chassis



Uniboot Singlemode LC Patchcords

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Review FACT Optical Distribution Frame (ODF) Modular Design here.

Frames	Dimensions	Max. Termination Capacity	Catalog Number	Catalog Description
Cross-connect frame, patching on the left	2200 mm x 1050 mm x 300 mm (87 in. x 41 in. x 12 in)	2688 single LC or 1344 SC connections per frame	760243094	FACT-FRCLHP22
Cross-connect frame, patching on the right	2200 mm x 1050 mm x 300 mm (87 in. x 41 in. x 12 in)	2688 single LC or 1344 SC connections per frame	760243095	FACT-FRCCRHP22
Interconnect frame, patching on the right	2200 mm x 900 mm x 300 mm (87 in. x 35 in. x 12 in)	2880 single LC or 1440 SC connections per frame	760243096	FACT-FRICRHP22
Path cord overlength management bay	2200 mm x 200 mm x 300 mm (87 in. x 8 in. x 12 in)	N/A	760243097	FACT-FROLB22
Frame Accessories			Catalog Number	Catalog Description
Cross-connect door kit. Set of two doors with two door handles per door. The door handles are compatible with half cylinder locks according to DIN 18252 (EN 1303). Locks not included.			760243098	FACT-FRCCD22
Cross-connect side panel kit (set of two panels)			760243099	FACT-FRCCP22
Interconnect door kit. Set of two doors with two door handles per door. The door handles are compatible with half cylinder locks according to DIN 18252 (EN 1303). Locks not included.			760243100	FACT-FRICD22
Patch cord overlength bay door. Set of one door with two door handles. The door handles are compatible with half cylinder locks according to DIN 18252 (EN 1303). Locks not included.			760243101	FACT-FROLBD22
Fiber guide fixation kit			760243110	FACT-FRACCFG5
Kit with two half cylinder locks according to DIN 18252 (EN 1303). Two lock kits are required for a frame door kit, only 1 lock kit required for OLB door kit.			760245341	FACT-FRACCDL2 (2-pack)
FACT Cable Attachment Plates	Compatible with Frame		Catalog Number	Catalog Description
One cable attachment plate for frame side duct and one cable to flex conversion component set	FACT		760243108	FACT-FRACCCAPL
One cable to flex conversion component set for cable attachment plate	FACT		760243111	FACT-FRACCCFT
One fan out fixation plate for frame side duct and eight fan out fixation component sets	FACT		760243109	FACT-FRACCFOP
Eight fan out fixation component sets (for fan out fixation plate)	FACT		760243112	FACT-FRACCFOPK-8
FACT Cable Termination Units	Element Type		Description Code	Part Number
FACT cable termination unit (CTU), kit for 6E FACT chassis, accommodates: 1 cable 2.5-14 mm or 2 cables 2.5-8.5 mm or 4 cables 2.5-5 mm or 1 flex tube OD 16 mm, only for use in. FACT frame	CTU		FACT-FRACCCTU6E	760243107
FACT cable termination unit (CTU), kit for 4E FACT chassis, accommodates: 1 cable 2.5-14 mm or 2 cables 2.5-8.5 mm or 4 cables 2.5-5 mm or 1 flex tube OD 16 mm, only for use in. FACT frame	CTU		FACT-FRACCCTU4E	760243105
FACT cable termination unit (CTU), kit for 3E FACT chassis, accommodates: 1 cable 2.5-14 mm or 2 cables 2.5-8.5 mm or 4 cables 2.5-5 mm or 1 flex tube OD 16 mm, only for use in. FACT frame	CTU		FACT-FRACCCTU3E	760243104
FACT cable termination unit (CTU), kit for 2E FACT chassis, accommodates: 1 cable 2.5-14 mm or 2 cables 2.5-8.5 mm or 4 cables 2.5-5 mm or 1 flex tube OD 16 mm, only for use in. FACT frame	CTU		FACT-FRACCCTU2E	760243103
FACT cable termination unit (CTU), kit for 1E FACT chassis, accommodates: 1 cable 2.5-14 mm or 2 cables 2.5-8.5 mm or 4 cables 2.5-5 mm or 1 flex tube OD 16 mm, only for use in. FACT frame	CTU		FACT-FRACCCTU1E	760243102

All frame kits include:

- Wall and back-to-back connection kit
- Side-to-side connection kit
- Earthing kit
- Adjustable feet
- Intuitive installation instructions
- Color label kit for spool identification and intuitive patch cord routing
- Required hardware and fasteners
- Pre-installed position number identification strip for FACT-style and 19-in.-style

All frame accessory kits include:

- Intuitive installation instruction
- Required hardware and fasteners

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Review FACT Optical Distribution Frame (ODF) Modular Design [here](#).

FACT Splice-Patch and Splice-Splice Elements	Element Type	Fiber Count	Fiber Type/Splice Protection	Description Code	Part Number
FACT Fiber Optic Patch/Splice Panel, gray, 6E high, 288-port, singlemode, loaded with LC/UPC adapters and C-grade pigtails, SMOUV splice tray type, left-hand patch	Splice-Patch	288	OS2/SMOUV	FACT-6ELHPL1S	760240562
FACT Fiber Optic Patch/Splice Panel, gray, 6E high, 288-port, singlemode, loaded with LC/UPC adapters and C-grade pigtails, SMOUV splice tray type, right-hand patch	Splice-Patch	288	OS2/SMOUV	FACT-6ERHPL1S	760240694
FACT Fiber Optic Patch/Splice Panel, gray, 4E high, 192-port, singlemode, loaded with LC/UPC adapters and C-grade pigtails, SMOUV splice tray type, left-hand patch	Splice-Patch	192	OS2/SMOUV	FACT-4ELHPL1S	760240013
FACT Fiber Optic Patch/Splice Panel, gray, 4E high, 192-port, singlemode, loaded with LC/UPC adapters and C-grade pigtails, SMOUV splice tray type, right-hand patch	Splice-Patch	192	OS2/SMOUV	FACT-4ERHPL1S	760240055
FACT Fiber Optic Patch/Splice Panel, gray, 3E high, 144-port, singlemode, loaded with LC/UPC adapters and C-grade pigtails, SMOUV splice tray type, left-hand patch	Splice-Patch	144	OS2/SMOUV	FACT-3ELHPL1S	760240007
FACT Fiber Optic Patch/Splice Panel, gray, 3E high, 144-port, singlemode, loaded with LC/UPC adapters and C-grade pigtails, SMOUV splice tray type, right-hand patch	Splice-Patch	144	OS2/SMOUV	FACT-3ERHPL1S	760240027
FACT Fiber Optic Patch/Splice Panel, gray, 2E high, 96-port, singlemode, loaded with LC/UPC adapters and C-grade pigtails, SMOUV splice tray type, left-hand patch	Splice-Patch	96	OS2/SMOUV	FACT-2ELHPL1S	760240001
FACT Fiber Optic Patch/Splice Panel, gray, 2E high, 96-port, singlemode, loaded with LC/UPC adapters and C-grade pigtails, SMOUV splice tray type, right-hand patch	Splice-Patch	96	OS2/SMOUV	FACT-2ERHPL1S	760240020
FACT Fiber Optic Patch/Splice Panel, gray, 1E high, 48-port, singlemode, loaded with LC/UPC adapters and C-grade pigtails, SMOUV splice tray type, left-hand patch	Splice-Patch	48	OS2/SMOUV	FACT-1ELHPL1S	760240450
FACT Fiber Optic Patch/Splice Panel, gray, 1E high, 48-port, singlemode, loaded with LC/UPC adapters and C-grade pigtails, SMOUV splice tray type, left-hand patch	Splice-Patch	48	OS2/SMOUV	FACT-1ERHPL1S	760240585

Note: FACT elements are also available with APC finish. See details [here](#).

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Review FACT Optical Distribution Frame (ODF) Modular Design here.

FACT Splice Chassis	Number of Trays Per FACT Chassis				
The FACT splice chassis is a multipurpose splice shelf featuring up to 72 SMOUV splices per FACT element. In combination with the FACT-ACCCTU accessories, the FACT splice chassis supports multiple splice applications, including: <ul style="list-style-type: none"> • Outdoor-to-indoor loose-tube cable • Loose-tube cable to pigtails (single aramid yarn termination) • Loose-tube cable to breakout or intra-facility (IFC) cable • Pigtail to pigtail (single aramid yarn termination) 		A04	S04	A12	S12
	1E	12	12	8	6
	2E	24	24	16	12
	3E	36	36	24	18
	4E	48	48	32	24
FACT Splice-Patch and Splice-Splice Elements	Element Type	Fiber Count	Fiber Type / Splice Protection	Description Code	Part Number
FACT Fiber Optic Splice Panel, gray, 4E high, loaded with 24 trays for holding up to 12 SMOUV type splices per tray	Splice - Splice	288	OS2 / SMOUV	FACT-4ESPLS12	760239970
FACT Fiber Optic Splice Panel, gray, 2E high, loaded with 12 trays for holding up to 12 SMOUV type splices per tray	Splice - Splice	144	OS2 / SMOUV	FACT-2ESPLS12	760239963
FACT Fiber Optic Splice Panel, gray, 1E high, loaded with 6 trays for holding up to 12 SMOUV type splices per tray	Splice - Splice	72	OS2 / SMOUV	FACT-1ESPLS12	760239959

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Designed for flexibility and user friendliness, the Universal Mounted Splice Cabinet has the ability to mount in a 19-in. or 23-in. two- or four-post rack. It can also be mounted on the wall. This high density solution allows for up to 6912 splices in the 24-tray cabinet size, and 3456 splices in the 12-tray cabinet size, which are easily accessible due to the dedicated mesh tubing routing. The Universal Mounted Splice Cabinet's unique design includes over 6 ft (1.8 m) of slack to allow up to three splicers to be working side-by-side at the same time.



Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----




Select a product for more information.



Splice Tray



SMOUV Splice Protectors

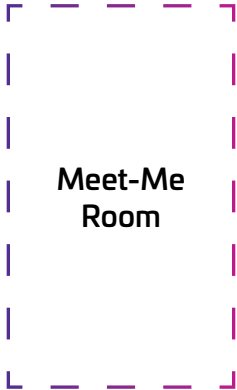

Meet-Me Room



Indoor or Indoor/
Outdoor Fiber Cable



Ribbon Cable Breakout Kit
(not required if using stranded indoor cable)




Universal Mount
Splice Cabinet



Outdoor Rollable
Ribbon Fiber Cable



Ribbon Cable Breakout Kit

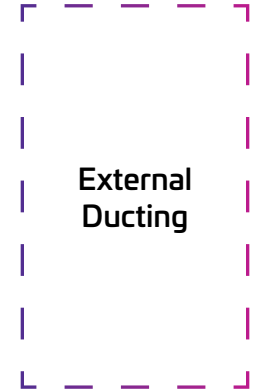

External
Ducting

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Review Universal Mount Splice Cabinet (UMSC) System Selection [here](#).

Universal Mount Splice Cabinet	Fiber Count	Dimensions	Weight	Description Code	Part Number
Universal Mount Splice Cabinet with up to 3456 fiber splices capacity (Rollable ribbon cables), 12 trays, exit up, gray	3,456	42.3 in. (1074 cm) x 17.84 in. (45.3 cm) x 11.54 in. (29.3 cm)	32 lbs. (14.5 kg)	ODF-SPLCAB-12	760248104
Universal Mount Splice Cabinet with up to 6912 fiber splices capacity (Rollable ribbon cables), 24 trays, exit up, gray	6,912	68.5 in. (174 cm) x 17.84 in. (45.3 cm) x 11.54 in. (29.3 cm)	52 lbs. (23.6 kg)	ODF-SPLCAB-24	760245548
Splicing Accessories	Fiber Count	Breakout Length	Description Code	Part Number	
FOST splice tray, 288f Rollable ribbon fiber splicing per tray	288	N/A	FOST-ACC-D-TRAY-RR-288-KIT	760243050	
Breakout kit used across multiple applications (FEC, FLEX, OMX, SD cable counts 144F, 288F, 432F, 576F)	144/288/432/576	50 in	RIBCBOU-3/8-50-144/288/432/576	760244150	
Breakout kit used across multiple applications (FEC, FLEX, SD)	864/1152	50 in	RIBCBOU-3/8-50-864/1152	760244144	
Breakout kit used across multiple applications (FEC, FLEX, SD)	1728	75 in	RIBCBOU-3/8-75-1728	760244149	
Breakout kit used across multiple applications (FEC, FLEX)	3456	125 in	RIBCBOU-3/8-125-3456	760244147	
Accessories			Description Code	Part Number	
Equipment Rack, 2-Post, 6 in. (152 mm) Channel x 7 ft (2134 mm) H - 19 in. (482.6 mm) Alu (45U) 12-24 Tapped Rails, Black		45U	RK6-45A	760082495	
Equipment Rack, 2-Post, 3 in (76 mm) Channel x 7ft (2134 mm) H - 19 in (482.6 mm) Alu (45U) 12-24 Tapped Rails, Black		45U	RK3-45A	760082479	
19-in. rack mount brack for Universal Mount Splice Cabinet, 1 kit per cabinet			ODF-ACC-BRK-19	760245549	
Raised Floor Mounting Kit, 5/8-in.				FDF-ACC146	
SMOUV Fiber Optic Splice Heat Shrink Protective Sleeve for 12 ribbons (1000 sleeves per MID)	12 Ribbon Fibers per Sleeve		SMOUV-1120-R2/12-02	757849-000	
ODF-ACC-BRK-WM, Wall Mount brack for Universal Mount Splice Cabinet, 1 kit per cabinet			ODF-ACC-BRK-WM	760245551	

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



- Accepts up to nine 4RU chassis
- Enables interconnect and/or cross-connect applications
- Integral slack storage reduces jumper congestion
- An integrated lower trough system with passthrough simplifies cable routing in a frame lineup
- On-frame splicing eliminates the need to access the rear of each panel to perform splicing, thereby reducing the risk of damage to the panel's internal components
- Integrated left-side cable entry ports on splice cabinet standardizes the length of split convoluted tubing needed to provide additional protection of the mesh sleeve-enclosed 24-fiber ribbon bundles
- Slack storage capacity of at least 10 ft (3.05 m) of mesh-enclosed ribbon slack per 24-fiber ribbon bundle
- An optional locking door to provide protection against unauthorized access to the entire frame



Propel fiber solutions are designed for today's more crowded and demanding environments. Propel supports 72 duplex LC ports or 72 MPO ports per RU. Propel modules, adapter packs and cassettes are 24 fiber solutions.

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure


MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Select a product for more information.

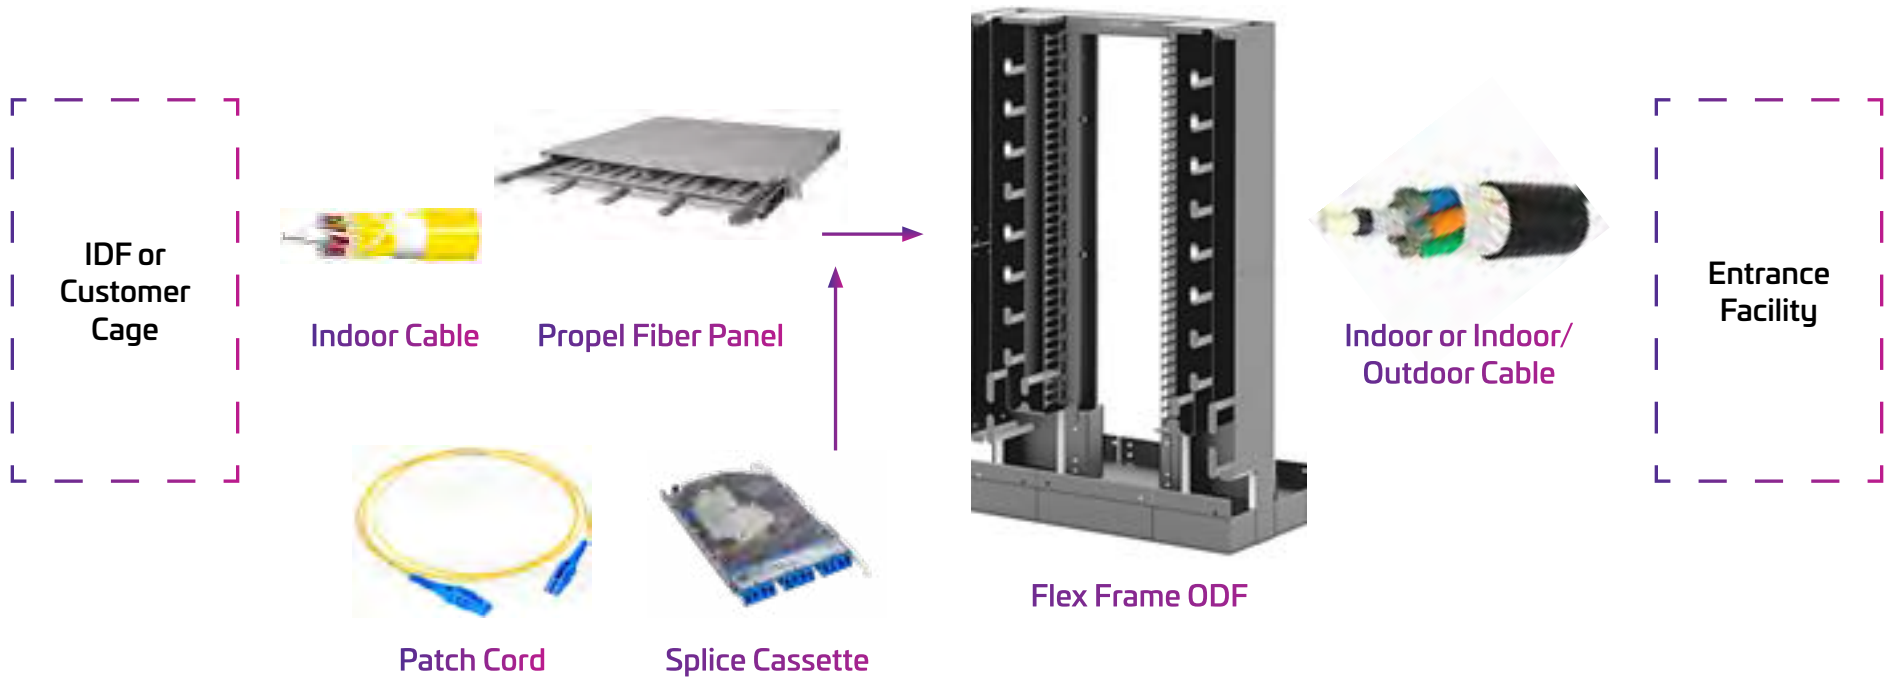

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



[Review Flex Frame System Selection here.](#)

Flex Frame ODF	Dimensions		Weight	Description Code	Part Number
Rack with cable managers, 19" standard mouting, 36 RU of open rack space	H: 2.134 m 84 in. W: 1.3391 m 52.72 in. D: 1.3391 m 52.72 in.		181.437 kg 400 kg	ODF-FF19CM-36	760242401
Propel Chassis	HU	Max Number of LC Connectors	Number of 12 Fiber Propel Splice Cassettes	Description Code	Part Number
Propel 4RU sliding tray fiber panel, accepts Propel ULL modules or adapter packs, providing up to 288 duplex LC ports, 288 MPO ports or 576 SN ports (1152f)	4	576	48	PPL-4U	760252004
Propel 2RU sliding tray fiber panel, accepts Propel ULL modules or adapter packs, providing up to 144 duplex LC ports, 144 MPO ports or 288 SN ports (576f)	2	288	24	PPL-2U	760252003
Propel 1RU sliding tray fiber panel, accepts Propel ULL modules or adapter packs, providing up to 72 duplex LC ports, 72 MPO ports or 144 SN ports (288f)	1	144	12	PPL-1U	760252002
Splice Cassettes	Fiber Type	Pigtail Fiber Type	Polarity Method	Description Code	Part Number
Propel Singlemode Splice Cassette, 24LC/UPC with internal shutters, OS2 ribbon fiber pigtail, Method B Enhanced ULL	OS2	Rollable Ribbon	Method B Enhanced	PPL-SP-24LC-SM-RPT-BEU	760255056
Propel Singlemode Splice Cassette, 24LC/UPC with internal shutters, OS2 250µm single fiber pigtails, Method B Enhanced ULL	OS2	Stranded	Mehtod B Enhanced	PPL-SP-24LC-SM-PT-BEU	760255053
Propel Singlemode Splice Cassette, 24LC/UPC with internal shutters, OS2 250µm single fiber pigtails, Method A Straight ULL	OS2	Standed	Method A (Pairs Straight)	PPL-SP-24LC-SM-PT-ASU	760255081
Propel Multimode Splice Cassette, 24LC/UPC with internal shutters, OM4 250µm single fiber pigtails, Method B Enhanced ULL	OM4	Standed	Method B Enhanced	PPL-SP-24LC-OM4-PT-BEU	760255054
Propel Multimode Splice Cassette, 24LC/UPC with internal shutters, OM4 ribbon fiber pigtail, Method B Enhanced ULL	OM4	Rollable Ribbon	Mehtod B Enhanced	PPL-SP-24LC-OM4-RPT-BEU	760255057
Accessories				Description Code	Part Number
Raised Floor Mounting Kit, 5/8-in				N/A	FDF-ACC146
Concrete Floor Mounting Kit, 5/8-in				N/A	RINST-FLR
Small universal blocking kit, for use with ribbon fiber splice cassettes				BK-FP-SML	760238380

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



With the FOSC 600 Series, CommScope offers customers high-capacity fiber splicing solutions built on the industry-leading design of the FOSC series and our unique engineering expertise in delivering both high density and ease of use.

The FOSC 600 Series can be used in a variety of trunk and feeder applications for splicing a wide range of fiber cable types and sizes, housing of connectorized distribution and demarcation points and deployment of optical passives.

The sealing system of the FOSC 600 builds on the proven reliability of the FOSC 450 series and features the versatile and popular gel sealing technology for termination cables and a unique latching system for quick closure opening and closing without any special tools required.

The FOSC 600D Series can be deployed anywhere in the outside plant for a multitude of functions including the splicing of almost any cable type, up to 1.4 in.(3.56 cm) diameter and 1,728 fiber splice capacity. It's used to house the connectorized distribution and demarcation points and the deployment of optical passives.

Using the same closure, the FOSC 600D-XL series is like the 600D except it has a larger tray tower

enabling up to 12 single fiber trays or six ribbon fiber trays with up to 3,456 fiber splice capacity.

Features and benefits

- Up to 1,728 single fibers or 3,456 ribbon fibers
- Up to 12 single fiber trays or six ribbon fiber trays
- Up to 16 separate cable ports
- Cables up to 1.4 in.(3.56 cm) diameter
- Compact size designed for easy field stacking
- Butt or inline splice closure, field configurable
- All internal parts can be removed for easy re-configuration
- Hinging trays with controlled access to splices and slack storage
- Superior fiber management
- Storage basket included
- Wall-mount bracket included



Learn about dressing ribbon fiber into FOSC and splice tray here.



Shown with 12 single height trays

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Select a product for more information.



Rollable Ribbon Fiber Cable



FOSC Fiber Splice Closure



Rollable Ribbon Fiber Cable



FOSC600D-XL Fiber Splice Closure with Splice Trays	Dimensions	Total Number of Splices	Number of Splice Trays Included	Number of Splices Per Tray	Description Code	Part Number
3,456 fiber splice capacity. FOSC 600D-XL Fiber Optic Splice Closure Kit with 12 x FOSC D-48 standard size splice trays installed, each capable of up to 288 splices of 12 fiber “rollable ribbon” or “spider ribbon” fiber. Kit also includes 2 x 3-port FOSC 600 gel blocks, XL version slack storage basket, 2 x ground feedthrough lugs, flash test valve, and associated closure hardware and components.	10 in. (25.4 cm) x 10.8 in. (27.4 cm) x 32.6 in. (82.8 cm)	3,456	12	288	FOSC600-D6B-24-12-X2VXL	379484-000
1,728 fiber splice capacity. FOSC 600D-XL Fiber Optic Splice Closure Kit with 6 x FOSC D size Ribbon splice trays installed, each capable of up to 288 splices of ribbon 12 fiber. Kit also includes 2 x 3-port FOSC 600 gel blocks, XL version slack storage basket, 2 x ground feedthrough lugs, flash test valve, and associated closure hardware and components.	10 in. (25.4 cm) x 10.8 in. (27.4 cm) x 32.6 in. (82.8 cm)	1,728	6	288	FOSC600-D6B-R2-6-X2VXL	233947-000
864 fiber splice capacity. FOSC 600D-XL Fiber Optic Splice Closure Kit with 6 x FOSC D size Ribbon splice trays installed, each capable of up to 288 splices of ribbon 12 fiber. Kit also includes 2 x 4-port FOSC 600 gel blocks, XL version slack storage basket, 2 x ground feedthrough lugs, flash test valve, and associated closure hardware and components.	10 in. (25.4 cm) x 10.8 in. (27.4 cm) x 32.6 in. (82.8 cm)	864	6	288	FOSC600-D8B-R2-6-X2VXL	371599-000

CommScope offers a range of fiber splice enclosures to manage 160+ fibers. Please contact your partner or CommScope TAC for more details.

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure


MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information


MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----




EPX
48 ports LC-D or 32 ports MPO
No cable management
Basic labeling

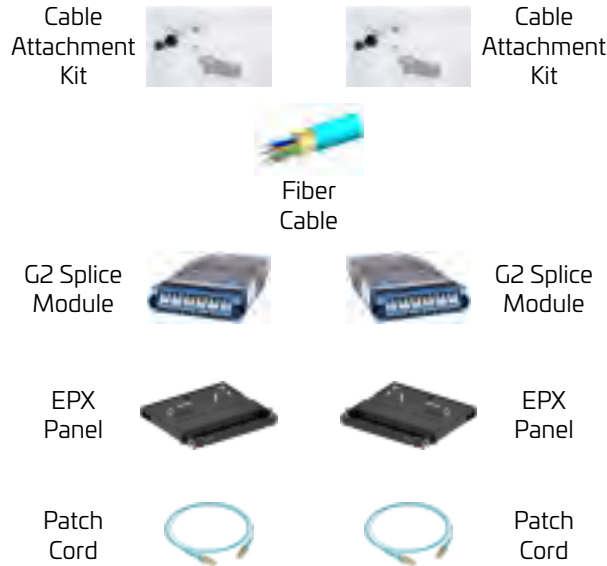


Propel
72 ports LC-D or 72 ports MPO
Front cable management
Labeling option (printer support)
Sliding tray for better cable modules access

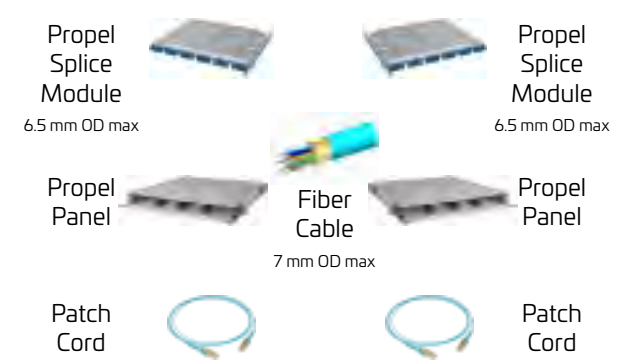

HD
48 ports LC-D or 32 ports MPO
Front cable management
Labeling option (printer support)
Sliding tray for easier cable/modules access

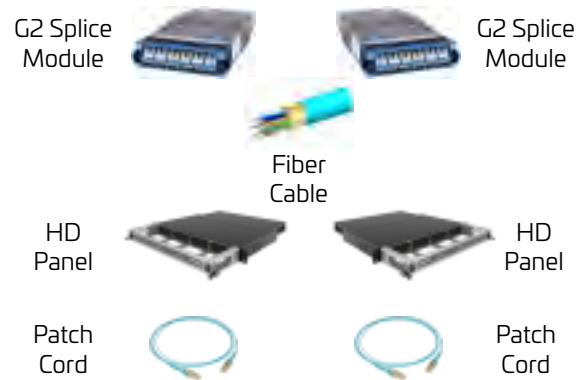

Modular Front Patching System (MFPS)
1U, 2U and 3U
Total of 48, 72, 96, 144, 192, 216 or 288 patch positions per shelf
Available in LC and SC
Full front panel access and port-level fiber identification

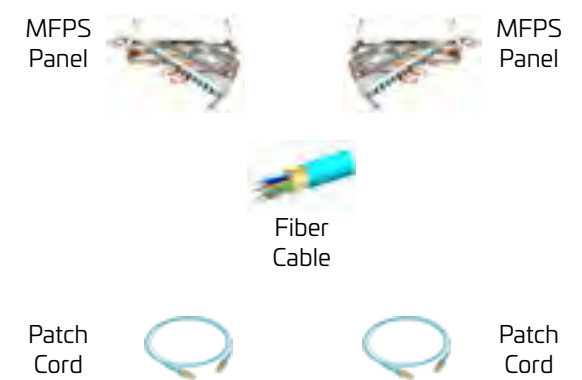

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



CommScope's MFPS family of solutions is specifically designed to meet the current and future challenges of your dynamic high-density FTTx deployments. The innovative modular design features stackable 40 mm elements. With as many as 288 patch positions in a 3HU size, the MFPS provides best-in-class fiber density.

Yet the space-saving design also gives technicians and installers all the accessibility they need. Each shelf element swings out individually for easy maintenance while protecting all other elements. The fiber management system secures each fiber in the tray while ensuring minimal bend and maximum optical performance.

Available in a variety of configurations and HU sizes, the MFPS family lets you easily customize your patching and splicing capabilities for each cabinet.

Capacity

- Compact and stackable 40 mm modules
- Total of 48, 72, 96, 144, 192, 216 or 288 patch positions per shelf
- Highest density of any front panel patch and splice solution

Flexibility

- Available as: splice/patch, patch/patch
- 1, 2, and 3HU sizes
- SC or LC connector

Serviceability

- Full front panel access and port level fiber identification
- Shelf remains closed for all patching operations
- Engineered fiber guides and bend control elements
- Minimal impact on live fibers during service



Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Review 19-in. Splice Solutions System Selection here.

EPX HD Propel

Fits to				Description Code	Part Number		
■	EPX 1U sliding panel, accepts (4) G2 style splice cassettes, modules or adapter packs, providing up to 48 duplex LC ports			EPX-1U-MOD-ENC	760249998		
	EPX 3U Splicing Fiber Panel accepts up to 7 AGL splice trays providing up to 336 single fiber splicing or up to 1008 ribbon fiber splicing			EPX-3U-SPL-ENC	760254513		
Fits to	Splice Accessories			Description Code	Part Number		
■	Cable Attachment Kit for EPX fiber panel				1671273-1		
	Fiber optic splice tray, stackable, for SMOUV splice protectors, 48 splices per tray, SMOUVs and SMOUV holder included			AGL-SPLICE-48	760241378		
	Ribbon Fiber Splice Tray Kit, stackable, 12 ribbon capacity			AGL-SPLICE-48	760243494		
Fits to	Splice Modules/Adapter Packs		Fiber	Module	Description Code	Part Number	
■	G2 Distribution Adapter Pack 12 LC with internal shutters, Multimode OM4 Aqua		OM4	Adapter Pack	360DPis-24LC-LS	760216754	
	G2 Distribution Adapter Pack 24 LC with internal shutters, Multimode OM5 Lime Green		OM5	Adapter Pack	360DPis-24LC-WB	760236041	
	G2 Distribution Adapter Pack 12 LC with internal shutters, Singlemode Blue		OS2	Adapter Pack	360DPis-24LC-SM	760216762	
Fits to	High Density Panels			RU	Description Code	Part Number	
■	High Density 1U modular cassette sliding Panel, accepts (4) InstaPATCH® 360 modules or MPO panels, providing up to 48 duplex LC ports, or up to 32 MPO ports			1	HD-1U	760209940	
	High Density 2U modular cassette sliding Panel, accepts (8) InstaPATCH 360 modules or MPO panels, providing up to 96 duplex LC ports or up to 64 MPO ports			2	HD-2U	760209957	
Fits to	Splice Modules/Accessories		Fiber	Module	Description Code	Part Number	
■	G2 Splice Cassette 24 LC, OM4, including pigtails		OM4	G2	G2-SP-24LCX-PT	760244927	
	G2 Splice Cassette 24 LC, OS2, including pigtails		OS2	G2	G2-SP-24LCG-PT	760244929	
	G2 blank adapters, 4 pcs		N/A	N/A	360G2-MOD-BLANK-4PK	760109462	
	G2 footprint accessories label kit				G2 FLEX LABEL KIT (12pcs)	760245472	
	Vertical Cable Guide Kit				VERT-CBL-BKT	760237133	
Fits to	Propel Chassis			HU	Description Code	Part Number	
■	Propel 4RU sliding tray fiber panel, accepts Propel ULL modules or adapter packs, providing up to 288 duplex LC ports, 288 MPO ports or 576 SN ports (1152f)			4	PPL-4U	760252004	
	Propel Singlemode Splice Cassette, 24LC/UPC with internal shutters, OS2 ribbon fiber pigtail, Method B Enhanced ULL			2	PPL-2U	760252003	
	Propel Singlemode Splice Cassette, 24LC/UPC with internal shutters, OS2 250µm single fiber pigtails, Method B Enhanced ULL			1	PPL-1U	760252002	
Fits to	Splice Cassettes		Fiber	Type	Polarity Method	Description Code	Part Number
■	Propel Singlemode Splice Cassette, 24LC/UPC with internal shutters, OS2 ribbon fiber pigtail, Method B Enhanced ULL		OS2	Rollable Ribbon	Method B Enhanced	PPL-SP-24LC-SM-RPT-BEU	760255056
	Propel Singlemode Splice Cassette, 24LC/UPC with internal shutters, OS2 250µm single fiber pigtails, Method B Enhanced ULL		OS2	Stranded	Method B Enhanced	PPL-SP-24LC-SM-PT-BEU	760255053
	Propel Singlemode Splice Cassette, 24LC/UPC with internal shutters, OS2 250µm single fiber pigtails, Method A Straight ULL		OS2	Stranded	Method A Pairs Straight	PPL-SP-24LC-SM-PT-ASU	760255081
	Propel Multimode Splice Cassette, 24LC/UPC with internal shutters, OM4 250µm single fiber pigtails, Method B Enhanced ULL		OM4	Stranded	Method B Enhanced	PPL-SP-24LC-OM4-PT-BEU	760255054
	Propel Multimode Splice Cassette, 24LC/UPC with internal shutters, OM4 ribbon fiber pigtail, Method B Enhanced ULL		OM4	Rollable Ribbon	Method B Enhanced	PPL-SP-24LC-OM4-RPT-BEU	760255057
Fits to	19-in. Cable Management Accessories			Type	Description Code	Part Number	
■	Large universal blocking kit. Used for on-frame blocking and breakout of Rollable Ribon cables into 19-in. Panels			Rollable Ribbon	BK-FP-LRG	760238381	
	Small universal blocking kit. Used for on-frame blocking and breakout of Rollable Ribon cables into 19-in. Panels			Rollable Ribbon	BK-FP-SML	760238380	

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Review 19-in. Splice Solutions System Selection here.

EPX
HD
Propel
MFPS

Fits to	MFPS Panel	Total Number of Fibers	Patch Cord Entry Side	Connector, Splice Type, IEC Attenuation Grade	Description Code	Part Number
	MFPS Fiber Optic Panel, 19-in., 1RU, 48 fibers/HU, splice/patch, SMOUV/left, 48 SC/UPC, grade B	48	Left	LC/UPC, SMOUV, B	MFPS-KHD-P-SKLF-048	760244318
	MFPS Fiber Optic Panel, 19-in., 1RU, 48 fibers/HU, splice/patch, SMOUV/right, 48 SC/UPC, grade B	48	Right	LC/UPC, SMOUV, B	MFPS-KHD-P-SILF-048	760237174
Fits to	MFPS Patch-Splice Shelves	Total Number of Fibers	Patch Cord Entry Side	Connector, Splice Type, IEC Attenuation Grade	Description Code	Part Number
	MFPS Fiber Optic Panel, 19-in., 1RU, 48 fibers/HU, splice/patch, SMOUV/left, 48 SC/UPC, grade B	48	Left	SC/UPC, SMOUV, B	MFPS-KHD-P-SKSF-048	760243360
	MFPS Fiber Optic Panel, 19-in., 1RU, 48 fibers/HU, splice/patch, SMOUV/right, 48 SC/UPC, grade B	48	Right	SC/UPC, SMOUV, B	MFPS-KHD-P-SISF-048	760251621
	MFPS Fiber Optic Panel, 19-in., 1RU, 48 fibers/HU, splice/patch, SMOUV/left, 48 LC/UPC, grade B	48	Left	LC/UPC, SMOUV, B	MFPS-KHD-P-SKLF-048	760244318
	MFPS Fiber Optic panel, 19-in., 1RU, 48 fibers/HU, splice/patch, SMOUV/right, 48 LC/UPC, grade B	48	Right	LC/UPC, SMOUV, B	MFPS-KHD-P-SILF-048	760237174
	MFPS Fiber Optic panel, 19-in., 2RU, 48 fibers/HU, splice/patch, SMOUV/left, 96 SC/UPC, grade B	96	Left	SC/UPC, SMOUV, B	MFPS-JHD-P-SKSF-096	
	MFPS Fiber Optic panel, 19-in., 2RU, 48 fibers/HU, splice/patch, SMOUV/right, 96 SC/UPC, grade B	96	Right	SC/UPC, SMOUV, B	MFPS-JHD-P-SISF-096	
	MFPS Fiber Optic Panel, 19-in., 1RU, 96 fibers/HU, splice/patch, SMOUV/left, 96 LC/UPC, grade B	96	Left	LC/UPC, SMOUV, B	MFPS-KXD-P-SKLF-096	760238812
	MFPS Fiber Optic Panel, 19-in., 1RU, 96 fibers/HU, splice/patch, SMOUV/right, 96 LC/UPC, grade B	96	Right	LC/UPC, SMOUV, B	MFPS-KXD-P-SILF-096	760244680
	MFPS Fiber Optic panel, 19-in., 2.8RU, 48 fibers/HU, splice/patch, SMOUV/left, 144 SC/UPC, grade B	144	Left	SC/UPC, SMOUV, B	MFPS-JHD-P-SKSF-144	
	MFPS Fiber Optic panel, 19-in., 2.8RU, 48 fibers/HU, splice/patch, SMOUV/right, 144 SC/UPC, grade B	144	Right	SC/UPC, SMOUV, B	MFPS-JHD-P-SISF-144	
	MFPS Fiber Optic Panel, 19-in., 2RU, 72 fibers/HU, splice/patch, SMOUV/left, 144 LC/UPC, grade B	144	Left	LC/UPC, SMOUV, B	MFPS-JED-P-SKLF-144	760241521
	MFPS Fiber Optic panel, 19-in., 2RU, 72 fibers/HU, splice/patch, SMOUV/right, 144 LC/UPC, grade B	144	Right	LC/UPC, SMOUV, B	MFPS-JED-P-SILF-144	760237807
	MFPS Fiber Optic Panel, 19-in., 3RU, 96 fibers/HU, splice/patch, SMOUV/left, 288 LC/UPC, grade B	288	Left	LC/UPC, SMOUV, B	MFPS-IXD-P-SKLF-288	760238814
	MFPS Fiber Optic panel, 19-in., 2.8RU, 96 fibers/HU, splice/patch, SMOUV/right, 288 LC/UPC, grade B	288	Right	LC/UPC, SMOUV, B	MFPS-IXD-P-SILF-288	EH6586-000

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Select a product for more information.



Outdoor Armored Cable



Indoor Stranded Microsheath Cable



Indoor Rollable Ribbon Central Loose Tube Cable



Indoor Rollable Ribbon Loose Tube Cable



Indoor/Outdoor Rollable Ribbon Central Tube Cable, Interlocking Armored



Indoor/Outdoor Rollable Ribbon Loose Tube Cable, Interlocking Armored



Indoor/Outdoor Rollable Ribbon Central Loose Tube Cable



Indoor/Outdoor Rollable Ribbon Loose Tube Cable



Outdoor Rollable Ribbon Stranded Loose Tube Cable, Armored



Outdoor Rollable Ribbon Stranded Loose Tube Cable

Learn more about CommScope's [Rollable Ribbon Fiber Solutions here.](#)

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Advances in technology have enabled the data center industry to keep ahead of the insatiable demand for more capacity and bandwidth. Faster processors, higher density storage and high-speed, more cost-effective connectivity have been key contributors to this success.

Rollable ribbon fiber technology is one of the latest technology advances that helps data center managers meet demand while maximizing precious space in pathways and ducts. The inherent flexibility of the rollable ribbon matrix allows it to deliver up to twice as many fibers within the same cable diameter as conventional flat ribbon cables while maintaining the installation advantages that ribbon technology offers.

CommScope's rollable ribbon solutions extend well beyond just fiber cable. From the outside plant networks, to building entrance, meet-me rooms and even extending to customer cages, CommScope offers a comprehensive range of singlemode fiber solutions that fully exploit rollable ribbon fiber technology—offering MTDC operators and their clients faster time-to-service and better utilization of valuable space in the data center.



Rollable Ribbon Fiber Cable



Flat Ribbon Fiber Cable

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



CommScope's rollable ribbon technology utilizes partially bonded fiber ribbons composed of 12 fibers. Unlike conventional ribbons, which are fully longitudinally bonded, rollable ribbons are partially bonded. As seen here, the partial bonding process used with rollable ribbons allows them to be easily separated and "rolled" into a cylinder, thus making much better use of space when compared with flat ribbons.

Cables containing rollable ribbon fibers offer significant advantages over flat ribbon fiber cables, including the following:

- Double the fiber density of standard matrix flat ribbons
- Smaller, lighter cables simplify handling and installation
- Significant reduction in splice time through use of mass fusion splicing
- No preferential bend (common in flat matrix ribbons)
- Easy separation for splicing or connectorization

- Smaller bend radii due to smaller cable diameter, allowing smaller telecom spaces such as closures, panels and hand holes
- Outdoor cables available in gel-free construction
- Fiber counts available from 144 to 3,456

OSP rollable ribbon fiber cables offer double the fiber counts compared with flat ribbon fiber cables as shown in the table below comparing several duct sizes.



Max Fiber Count	1 in. (2.5 cm) duct	1 1/4 in. (3.2 cm) duct	2 in. (5 cm) duct
Flat Ribbon	432	864	1728
Rollable Ribbon	864	1728	3456



Rollable Ribbon



Conventional Flat Ribbon Matrix (Side View and Top View)

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Rollable Ribbon Non-Armored External Fiber Optic Cable	Total Number of Fibers	Fibers Per Sub-Unit	Sheath Material	Outer Diameter	Minimum Bend Radius, Loaded	Description Code	Part Number
Outdoor Non-Armored, All-Dielectric, Gel-Free, Stranded Loose Tube Rollable Ribbon Cable	1728	288	UV Stabilized	0.988 in. (25.1 mm)	14.843 in. (377 mm)	D-1728-LN-RR-F12NS/8W/99H	760239389
Outdoor Non-Armored, All-Dielectric, Gel-Free, Stranded Loose Tube Rollable Ribbon Cable	864	144	UV Stabilized	0.827 in. (21 mm)	12.362 in. (314 mm)	D-864-LN-RR-F12NS/8W/99H	760241354
Rollable Ribbon Armored External Fiber Optic Cable	Total Number of Fibers	Fibers Per Sub-Unit	Sheath Material	Outer Diameter	Minimum Bend Radius, Loaded	Description Code	Part Number
Outdoor Steel Armored, Gel-Free, Stranded Loose Tube Rollable Ribbon Cable	1728	288	UV Stabilized	1.055 in. (26.8 mm)	15.787 in. (401 mm)	D-1728-LA-RR-F12NS/8W/99H	760239858
Outdoor Steel Armored, Gel-Free, Stranded Loose Tube Rollable Ribbon Cable	864	144	UV Stabilized	0.913 in. (23.2 mm)	13.701 in. (348 mm)	D-864-LA-RR-F12NS/8W/99H	760241358
Rollable Ribbon Non-Armored Indoor / Outdoor Armored External Fiber Optic Cable	Total Number of Fibers	Fibers Per Sub-Unit	Sheath Material	Outer Diameter	Minimum Bend Radius, Loaded	Description Code	Part Number
Outdoor/Indoor LSZH Rollable Ribbon Cable with 200um Fibers	3456	576	LSZH Cca	1.083 in. (27.5mm)		Z-3456-LN-RR-F12BK/8G1/99L/200/C	760250982
Indoor/Outdoor, All-Dielectric, Low Smoke Zero Halogen (LSZH), Riser-Rated, Gel-Free, Loose Tube Rollable Ribbon Cable	1728	288	LSZH B2ca	1 in. (25.4 mm)	20 in. (508 mm)	Z-1728-LN-RR-F12BK/8G1/99H/B2	760244183
Indoor/Outdoor, All-Dielectric, Low Smoke Zero Halogen (LSZH), Riser-Rated, Gel-Free, Central Tube Rollable Ribbon Cable	864	Single Central Tube	LSZH Cca	0.768 in. (19.5 mm)	15.354 in. (390 mm)	Z-864-CN-RR-F12BK/8G1/99G/C	760239025
Rollable Ribbon Armored Indoor / Outdoor Armored External Fiber Optic Cable	Total Number of Fibers	Fibers Per Sub-Unit	Sheath Material	Outer Diameter	Minimum Bend Radius, Loaded	Description Code	Part Number
Indoor/Outdoor, Riser-Rated, Gel-Free, Inner Low Smoke Zero Halogen (LSZH) Stranded Loose Tube Rollable Ribbon Cable with Aluminum Interlocking Armor and a LSZH Outer Jacket	1728	288	LSZH B2ca	1.354 in. (34.4 mm)	20.315 in. (516 mm)	Z-1728-LZ-RR-F12BK/8G1/99H/B2	760245915
Indoor/Outdoor, Interlocking Armored, Low Smoke Zero Halogen (LSZH), Riser-Rated, Gel-Free, Central Tube Rollable Ribbon Cable	864	Single Central Tube	LSZH B2ca	1.106 in. (28.1 mm)	22.126 in. (562 mm)	Z-864-CZ-RR-F12BK/8G1/99G/B2	760239052
Rollable Ribbon Non-Armored Indoor Fiber Optic Cable	Total Number of Fibers	Fibers Per Sub-Unit	Sheath Material	Outer Diameter	Minimum Bend Radius, Loaded	Description Code	Part Number
Indoor, All-Dielectric, Low Smoke Zero Halogen (LSZH), Riser-Rated, Gel-Free, Loose Tube Rollable Ribbon Cable	1728	288	LSZH B2ca	1 in. (25.4 mm)	20 in. (508 mm)	N-1728-LN-RR-F12YL/8G1/99H/B2	760244182
Indoor, All-Dielectric, Low Smoke Zero Halogen (LSZH), Riser-Rated, Gel-Free, Central Tube Rollable Ribbon Cable	864	Single Central Tube	LSZH Cca	0.768 in. (19.5 mm)	15.354 in. (390 mm)	N-864-CN-RR-F12YL/8G1/99G/C	760242275
Indoor, All-Dielectric, Low Smoke Zero Halogen (LSZH), Riser-Rated, Gel-Free, Central Tube Rollable Ribbon Cable	288	Single Central Tube	LSZH Cca	0.492 in. (12.5 mm)	9.843 in. (250 mm)	N-288-CN-RR-F12YL/8G1/99G/C	760239308
Indoor All-Dielectric, Low Smoke Zero Halogen (LSZH), Riser-Rated, Gel-Free, Central Tube Rollable Ribbon Cable	144	Single Central Tube	LSZH Cca	0.413 in. (10.5 mm)	8.268 in. (210 mm)	N-144-CN-RR-F12YL/8G1/99G/C	760239307

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Stranded Non-Armored Microsheath Indoor Fiber Optic Cable	Total Number of Fibers	Fibers Per Sub-Unit	Sheath Material	Outer Diameter	Minimum Bend Radius, Loaded	Description Code	Part Number
Single Jacket All-Dielectric, Gel-Free, Indoor Stranded Microsheath Tube Cable OS2	144	12	LSZH Cca	0.402 in. (10.2 mm)	7.874 in. (200 mm)	L-144-LN-8F-M12YL/14D/GY/C	760243186
Single Jacket All-Dielectric, Gel-Free, Indoor Stranded Microsheath Tube Cable OS2	96	12	LSZH Cca	0.331 in. (8.4 mm)	6.693 in. (170 mm)	POC-FOMCRO-LSZH-96X4-CCA-STD	760245018
Single Jacket All-Dielectric, Gel-Free, Indoor Stranded Microsheath Tube Cable OS2	48	12	LSZH Cca	0.26 in. (6.6 mm)	5.118 in. (130 mm)	L-048-LN-8F-M12YL/14D/GY/C	760245020
Single Jacket All-Dielectric, Gel-Free, Indoor Stranded Microsheath Tube Cable OS2	24	12	LSZH Cca	0.26 in. (6.6 mm)	5.118 in. (130 mm)	L-024-LN-8F-M12YL/14D/GY/C	760245021
Single Jacket All-Dielectric, Gel-Free, Indoor Stranded Microsheath Tube Cable OS2	12	12	LSZH Cca	0.26 in. (6.6 mm)	5.118 in. (130 mm)	L-012-LN-8F-M12YL/14D/GY/C	760245022
Distribution Non-Armored Indoor Fiber Optic Cable	Total Number of Fibers	Fibers Per Sub-Unit	Sheath Material	Outer Diameter	Minimum Bend Radius, Loaded	Description Code	Part Number
TeraSPEED® Low Smoke Zero Halogen Riser, 48 fiber multi-unit with 12 fiber subunits	48	12	LSZH Cca	0.637 in. (16.19 mm)	9.567 in. (243 mm)	N-048-DS-8W-FMUYL/C	760004291
TeraSPEED Plenum, 48 fiber multi-unit with 12 fiber subunits	48	12	Plenum	0.637 in. (16.19 mm)	9.567 in. (243 mm)	P-048-DS-8W-FMUYL	760004382
TeraSPEED Low Smoke Zero Halogen Riser, 24 fiber single-unit, singlemode	24	N/A	LSZH	0.347 in. (8.82 mm)	5.197 in. (132 mm)	N-024-DS-8W-FSUYL/D	760019075
TeraSPEED Plenum, 24 fiber single-unit, singlemode	24	N/A	Plenum	0.347 in. (8.82 mm)v	5.197 in. (132 mm)	P-024-DS-8W-FSUYL	760018630
TeraSPEED Low Smoke Zero Halogen Riser, 12 fiber single-unit, singlemode	12	N/A	LSZH	0.240 in. (6.1 mm)	3.622 in. (92 mm)	N-012-DS-8W-FSUYL/D	760004267
TeraSPEED Plenum, 12 fiber single-unit, singlemode	12	N/A	Plenum	0.240 in. (6.1 mm)	3.622 in. (92 mm)	P-012-DS-8W-FSUYL	760004358
Loose Tube Cable Outdoor, Armored	Fiber Type	Fiber Count	Jacket Material	Description Code	Part Number		
Singlemode OS2 Single Jacket/Single Armor, Gel-Free, Outdoor Stranded Loose Tube Cable, 48 fibers	OS2	48	N/A	D-048-LA-8W-F12NS	760053314		
Singlemode OS2 Single Jacket/Single Armor, Gel-Free, Outdoor Stranded Loose Tube Cable, 96 fibers	OS2	96	N/A	D-096-LA-8W-F12NS	760053348		
Singlemode OS2 Single Jacket/Single Armor, Gel-Free, Outdoor Stranded Loose Tube Cable, 144 fibers	OS2	144	N/A	D-144-LA-8W-F12NS	760053355		
Singlemode OS2 Single Jacket/Single Armor, Gel-Free, Outdoor Stranded Loose Tube Cable, 288 fibers	OS2	288	N/A	D-288-LA-8W-F12NS	760053363		

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure


MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------


Reference Designs and Technical Information


MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----




LC/LC UPC Singlemode

	Length	Description Code	Part Number
Ultra Low Loss Singlemode, LC Uniboot to LC Uniboot, 1.5 mm Duplex Fiber Patch Cord, Low Smoke Zero Halogen/Riser 	3 ft.	UFGLLULK2-JXF003	UFGLLULK2
	5 ft.	UFGLLULK2-JXF005	UFGLLULK2
	7 ft.	UFGLLULK2-JXF007	UFGLLULK2
	10 ft.	UFGLLULK2-JXF010	UFGLLULK2
	15 ft.	UFGLLULK2-JXF015	UFGLLULK2
	30 ft.	UFGLLULK2-JXF030	UFGLLULK2

	Length	Description Code	Part Number
Ultra Low Loss Singlemode, LC Uniboot to LC Uniboot, 1.5 mm Duplex Fiber Patch Cord, Plenum 	3 ft.	UDGLLULK2-JXF003	UDGLLULK2
	5 ft.	UDGLLULK2-JXF005	UDGLLULK2
	7 ft.	UDGLLULK2-JXF007	UDGLLULK2
	10 ft.	UDGLLULK2-JXF010	UDGLLULK2
	15 ft.	UDGLLULK2-JXF015	UDGLLULK2
	30 ft.	UDGLLULK2-JXF030	UDGLLULK2

	Length	Description Code	Part Number
Fiber Optic Patch Cord, Duplex, Singlemode, LC/UPC to SC/UPC, yellow, Low Smoke Zero Halogen 	3 ft.	FFWLCSC42-JXF003	FFWLCSC42
	5 ft.	FFWLCSC42-JXF005	FFWLCSC42
	7 ft.	FFWLCSC42-JXF007	FFWLCSC42
	10 ft.	FFWLCSC42-JXF010	FFWLCSC42
	15 ft.	FFWLCSC42-JXF015	FFWLCSC42
	30 ft.	FFWLCSC42-JXF030	FFWLCSC42

	Length	Description Code	Part Number
Fiber Optic Patch Cord, Duplex, Singlemode, LC/UPC to SC/UPC, yellow, Plenum 	3 ft.	FDWLCSC42-JXF003	FDWLCSC42
	5 ft.	FDWLCSC42-JXF005	FDWLCSC42
	7 ft.	FDWLCSC42-JXF007	FDWLCSC42
	10 ft.	FDWLCSC42-JXF010	FDWLCSC42
	15 ft.	FDWLCSC42-JXF015	FDWLCSC42
	30 ft.	FDWLCSC42-JXF030	FDWLCSC42

Cable Management	Description Code	Part Number
Overlength storage, 4U	N/A	1671711-1
Horizontal cable through, 1U, single sided	HKT-19-SS-1U	760072942
Horizontal cable through, 2U, single sided	HKT-19-SS-2U	760072959
Horizontal cable through, 3U, single sided	HKT-19-SS-3U	760072967
Cable Manager 1U	N/A	1671495-1
Cable Manager 2U	N/A	1671495-2
Cable Manager 4U	N/A	1671495-4
Cable Manager 6U	N/A	1671495-6
Cable Manager 15U	N/A	1-1671495-5
Filler/Blank Panel, 1U x 19-in., Solid, Black	FPANEL-19-1U	760162065
1U Patchcord Management	HCM-19-SS-1U	760038240

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
---------------------	--------------------------	----------------------	--	--------------------------	---	---	--	---------------------------------------	---	----------------------------	------------------------------------	-------------------------------	------------------------------------	----------------------------------	--	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
--	--	--------------------------------	----------------------------------	---

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
---------------------------	---------------------------	----------------------------	------------------------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-----------------------------	--	--	--------------------------	----------------------------	---------------------




Pre-terminated Fiber Systems

Pre-terminated 19-in. Fiber System Solutions


Pre-terminated FACT ODF Fiber System Solutions




EPX
48 ports LC-D or 32 ports MPO
No cable management
Basic labeling

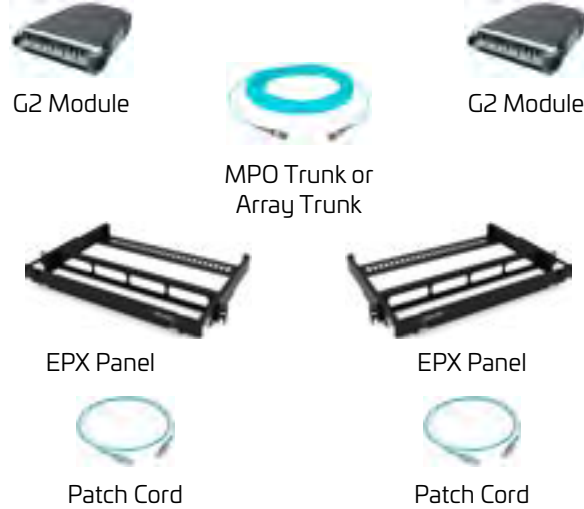


Propel
72 ports MPO, 72 ports LCD or 144 ports SN
Front cable management
Labeling option (printer support)
Sliding tray for better cable modules access
Panels available in 1, 2 and 4RU

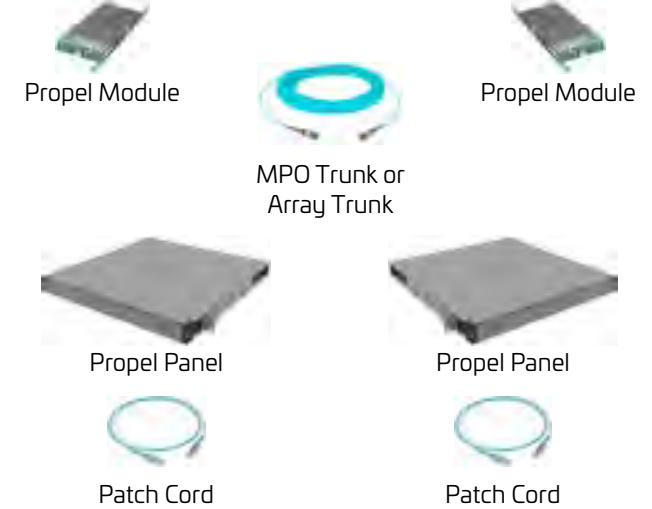

HD
48 ports LC-D or 32 ports MPO
Front cable management
Labeling option (printer support)
Sliding tray for easier cable/modules access
Panels available in 1, 2 and 4RU

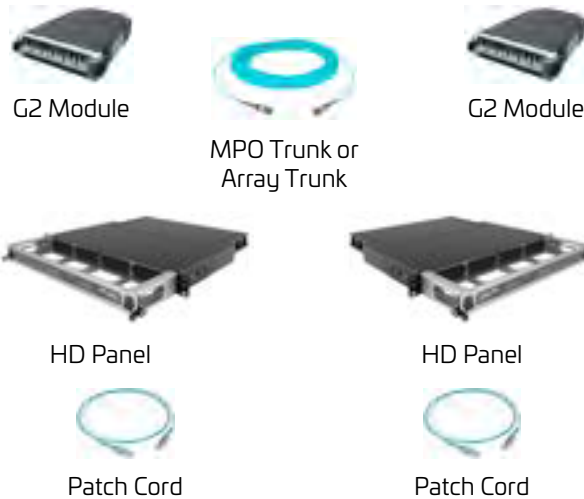

Evolve Mixed Media
For mixed copper and fiber installations
Fiber 48 ports LC-D or 32 ports MPO; Copper: 24 RJ45 ports
No cable management
Basic labeling
Panels available in 1RU

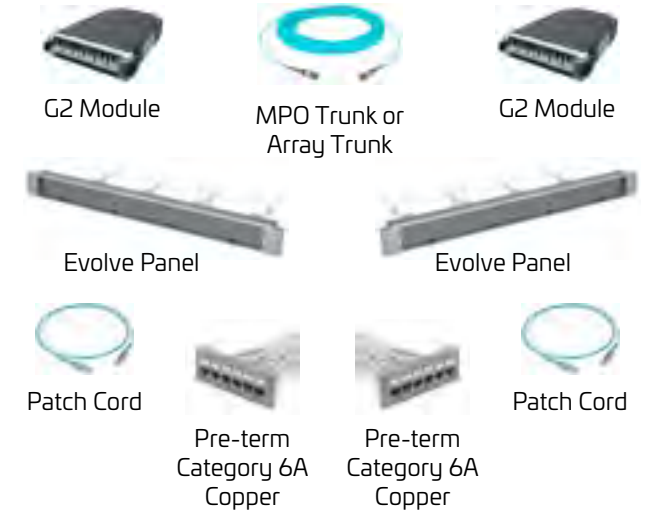

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------






Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Review Pre-terminated 19-in. Fiber System Selection here.

EPX
HD
Propel
Evolve Mixed Media

Fits to		Fits to Reference Designs				RU	Description Code	Part Number
	EPX Fiber Panel EPX 1U open fixed panel, accepts (4) G2 style splice cassettes, modules or adapter packs, providing up to 48 duplex LC ports					1	EPX-1U-MOD-OPEN-FX	760251098
Fits to	HD Fiber Panels	Fits to Reference Designs				RU	Description Code	Part Number
	High Density 1U modular cassette sliding Panel, accepts (4) G2 modules or adapter packs, providing up to 48 duplex LC ports, or up to 32 MPO ports					1	HD-1U	760209940
	High Density 2U modular cassette sliding Panel, accepts (8) InstaPATCH 360 modules or MPO panels, providing up to 96 duplex LC ports or up to 64 MPO ports					2	HD-2U	760209957
Fits to	Propel Fiber Panels	Fits to Reference Designs				RU	Description Code	Part Number
	Propel sliding tray fiber panel, accepts Propel ULL modules or adapter packs, providing up to 72 duplex LC ports, 72 MPO ports or 288 SN ports					1	PPL-1U	760252002
	Propel sliding tray fiber panel, accepts Propel ULL modules or adapter packs, providing up to 144 duplex LC ports, 144 MPO ports or 576 SN ports					2	PPL-2U	760252003
	Propel sliding tray fiber panel, accepts Propel ULL modules or adapter packs, providing up to 288 duplex LC ports, 288 MPO ports or 576 SN ports					4	PPL-4U	760252004
Fits to	Accessories for HD Patch Cord/Array Trunk Fitting Kit							Part Number
	Patch cord/array trunk fitting kit with 12 cable glands							760242678
	Trunk fitting kit with 12 cable glands							760242679
Fits to	Evolve Mixed Media Panels	Fits to Reference Designs				Copper Tech	Description Code	Part Number
	SYSTIMAX GigaSPEED® X10D® and GigaSPEED XL® Evolve 1U U/UTP Panel Kit					U/UTP	360-E-KIT-1U	760155739
	SYSTIMAX GigaSPEED X10D Evolve 1U F/UTP Panel Kit					F/UTP	360-IPR-MFTP-E-HD6B-1U-24	760150144
	SYSTIMAX GigaSPEED X10D Evolve 1U U/UTP Panel Kit					U/UTP	360-E-MOD-1U-24	760187187
Fits to	Evolve Mixed Media Panels Accessories						Description Code	Part Number
	SYSTIMAX 360 1100 Evolve G2 BEZEL (Cool Gray)						360-1100-E-FB-4PK	760175877
	SYSTIMAX 360 1100 Evolve Fiber Cable Management						361 1100-E-FCM	760175919
	SYSTIMAX 360 1100 Evolve G2 BEZEL (Blank)						360-1100-E-BB	760165191
Fits to	Propel Modules		Connector	Fiber	Module		Description Code	Part Number
	Propel ULL Singlemode MPO-12 Distribution Module, 12 duplex LC/UPC to 2X12f MPO/APC non-pinned, Method B Enhanced		MPO-12	OS2	Distribution		PPL-DM-12AU-24LC-SM-BEU	760252348
	Propel pass-through adapter pack, 12 MPO ports, Type B		Universal MPO-12	Universal	MPO Adapter Pack		PPL-AP-12-MPO-ALL-B	760252374
	Propel ULL Multimode OM4 MPO-12 Distribution Module, 12 duplex LC to 2X12f MPO/UPC non-pinned, Method B Enhanced		MPO-12	OM4	Distribution		PPL-DM-12U-24LC-OM4-BEU	760252346
	Propel ULL Multimode OM5 MPO-12 Distribution Module, 12 duplex LC to 2X12f MPO/UPC non-pinned, Method B Enhanced		MPO-12	OM5	Distribution		PPL-DM-12U-24LC-OM5-BEU	760252347
	Propel pass-through adapter pack, singlemode, 6 duplex LC/UPC ports		LC	OS2	LC Adapter Pack		PPL-AP-12-LC-SM	760252362
	Propel pass-through adapter pack, multimode OM4, 6 duplex LC ports		LC	OM4	LC Adapter Pack		PPL-AP-12-LC-OM4	760252363
	Propel pass-through adapter pack, multimode OM5, 6 duplex LC ports		LC	OM5	LC Adapter Pack		PPL-AP-12-LC-OM5	760252364

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------







Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Review Pre-terminated 19-in. Fiber System Selection here.

EPX
HD
Propel
Evolve Mixed Media

Fits to	G2 Fiber Modules/Adapter Packs		Connector	Fiber	Module	Description Code	Part Number	
<div style="display: flex; flex-direction: column; align-items: center;"> <div style="width: 10px; height: 10px; background-color: #FFD700; margin-bottom: 5px;"></div> <div style="width: 10px; height: 10px; background-color: #FF0000; margin-bottom: 5px;"></div> <div style="width: 10px; height: 10px; background-color: #008000;"></div> </div>	G2 ULL MPO-12 distribution module, 24LC to 2x12f MPO unpinned, OM5 Wideband, internal shutter		MPO-12	OM5	Distribution	DM12-24LC-WB-ULL	760236111	
	G2 ULL MPO-12 distribution module, 24LC to 2x12f MPO unpinned, OM4 internal shutter		MPO-12	OM4	Distribution	DM12-24LC-LS-ULL	760236110	
	G2 ULL 2x3 LazrSPEED® OM4 Conversion Module, (2) MPO-12 unpinned ports rear, (3) MPO-8 pinned front		MPO-12	OM4	Conversion	CM12-2x3-LS-ULL	760237217	
	G2 ULL 2x3 LazrSPEED OM5 Conversion Module, (2) MPO-12 unpinned ports rear, (3) MPO-8 pinned front		MPO-12	OM5	Conversion	CM12-2x3-WB-ULL	760237218	
	G2 ULL MPO-12 distribution module, 24LC to 2x12f MPOs unpinned, singlemode internal shutter		MPO-12	OS2	Distribution	DM12-24LC-SM-ULL	760238083	
	G2 ULL 2x3 Singlemode Conversion Module, (2) MPO-12 unpinned ports rear, (3) MPO-8 pinned front		MPO-12	OS2	Conversion	CM12-2X3-SM-ULL	760237216	
	G2 Distribution Adapter Pack, 360DP-8MPO, 8 x MPO		N/A	Universal	MPO Adapter Pack	360DP-8MPO	760107524	
	G2 Distribution Adapter Pack 24 LC with internal shutters, Multimode OM4 Aqua		N/A	OM4	LC Adapter Pack	360DPis-24LC-LS	760216754	
	G2 Distribution Adapter Pack 24 LC with internal shutters, Multimode OM5 Lime Green		N/A	OM5	LC Adapter Pack	360DPis-24LC-WB	760236041	
	G2 Distribution Adapter Pack 24 LC with internal shutters, Singlemode Blue		N/A	OS2	LC Adapter Pack	360DPis-24LC-SM	760216762	
G2 blank adapters, 4 pcs		N/A	N/A	Blank Panel	360G2-MOD-BLANK-4PK	760109462		
Fits to	Cable Management	Fits to Reference Designs				Description Code	Part Number	
<div style="display: flex; flex-direction: column; align-items: center;"> <div style="width: 10px; height: 10px; background-color: #FFD700; margin-bottom: 5px;"></div> <div style="width: 10px; height: 10px; background-color: #800080; margin-bottom: 5px;"></div> <div style="width: 10px; height: 10px; background-color: #FF0000; margin-bottom: 5px;"></div> <div style="width: 10px; height: 10px; background-color: #008000;"></div> </div>	Overlength storage, 4U						1671711-1	
	Horizontal cable through, 1U, single sided						HKT-19-SS-1U	760072942
	Horizontal cable through, 2U, single sided						HKT-19-SS-2U	760072959
	Horizontal cable through, 3U, single sided						HKT-19-SS-3U	760072967
	Cable Manager 1U							1671495-1
	Cable Manager 2U							1671495-2
	Cable Manager 4U							1671495-4
	Cable Manager 6U							1671495-6
	Cable Manager 15U							1-1671495-5
	Filler/Blank Panel, 1U x 19-in., Solid, Black						FPANEL-19-1U	760162065
	1U Patchcord Management						HCM-19-SS-1U	760038240
	Universal Mounting Bracket						360-UMB	760117564
	3 in (76 mm) Channel x 9.4 in (239 mm) H - 19 in (482.6 mm) Overhead Patch Panel Rack (4U) 3/8 Sq Punch, Black						OVRHRACK	760157800
	3 in (76 mm) Channel x 9.4in (239 mm) H - 19 in (482.6 mm) Overhead Patch Panel Rack (4U) 3/8 Sq Punch, with Mini Vertical Cable Management, Black						OVRHRACKVCM	760158592
	Mini Vertical Cable Management for Overhead Patch Panel Rack, 4U, black						OVRHDVCM	760164061
	Overhead Rack-to-Wire Basket Installation Kit						OVRHRACKBSKTKIT	760165282
	3 in (76 mm) Channel x 9.5 in (239 mm) H - 19 in (482.6 mm) Overhead Patch Panel Rack (6U) 3/8 Sq Punch, Black						OVRHRACK6U	760169581
	3 in (76 mm) Channel x 12.9 in (327.66 mm) H - 19 in (482.6 mm) Overhead Patch Panel Rack (6U) 3/8 Sq Punch, with Mini Vertical Cable Management, Black						OVRHRACKVCM6U	760169599

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Review Pre-terminated 19-in. Fiber System Selection here.

SYSTIMAX ULL and Propel Pre-Terminated Trunk Cables

12-fiber MPO connector-based modules available in LazrSPEED 550 OM4 and LazrSPEED OM5 Wideband multimode fiber solutions

12-fiber MPO connector-based modules available in TeraSPEED singlemode fiber solutions

Factory-terminated and tested trunk cables provide superior quality and performance for field connections

Reliable transmit-to-receive connectivity using Method B Enhanced polarity maintenance maximizes administrative convenience

Simplified reconfiguration for moves, adds and changes (MACs)

Easy upgrade path to parallel transmission and associated applications, and increased value of existing infrastructure

SYSTIMAX ULL and Propel trunks are provisioned with pins to interface with G2 and Propel modules (each supplied without pins)



Cable assemblies in the table below fit to:



SYSTIMAX ULL MPO-12 Trunk Cables

1 U	2 J	3 X	4 M	5 X	6 M	7 X	8 A	9 D	10 -	11 M	12 A	13 F	14-16 010	
Construction type U Ultra-Low Loss	Family J Trunk, LSZH/Riser G Trunk, Plenum	Fiber type G TeraSPEED singlemode (A2) X LazrSPEED 550 multimode V LazrSPEED OM5 WB multimode	Termination end A MX MPO (pinned)		Termination end B MX MPO (pinned)		Construction A 12 Fiber PmP	Fiber count D 12-fiber F 24-fiber H 48-fiber K 72-fiber L 96-fiber M 144-fiber			Color M Aqua N Lime green J Yellow LazrSPEED OM4 standard is aqua LazrSPEED OM5 standard is lime green TeraSPEED singlemode standard is yellow	Options A No gland B With gland C With pulling eye C for cabling between HD & EHD panels A for cabling between AGL panels and between AGL panels and EHD/HD panels Use accessory gland for patch cords in case gland is required on one side only	Unit of measure F Feet M Meter	Length 010-999 Feet 003-305 Meter



Cable assemblies in the table below fit to:



Propel MPO-12 Singlemode and Multimode Trunk Cables

1 U	2 G	3 X	4 M	5 X	6 M	7 X	8 C	9 D	10 -	11 M	12 J	13 F	14-16 010	
Construction type U Ultra-Low Loss	Family G Trunk, Plenum J Trunk, Dual Rated (OFNR/LSZH)	Fiber type G Singlemode (A2) X OM4 multimode V OM5 WB multimode	Termination end A MX MPO (pinned)		Termination end B MX MPO (pinned)		Construction C 12F PmP Trunk, 2.0 mm SU	Fiber count D 12-fiber F 24-fiber G 36-fiber H 48-fiber K 72-fiber L 96-fiber M 144-fiber N 192-fiber P 288-fiber			Color M Aqua N Lime green J Yellow	Breakout Length J 22" Break Propel No Pull Grip K 22" Break Propel Pull Grip	Unit of measure F Feet M Meter	Length 010-999 Feet 003-305 Meter

Note: For MPO-8, MPO-16, and MPO-24 products and other trunk configurations please contact your CommScope sales representative.

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Review Pre-terminated 19-in. Fiber System Selection here.

SYSTIMAX ULL MPO Array Trunks

12-fiber MPO connector-based modular design enables simple connections

Array trunks are constructed with 550 OM4 and OM5 Wideband and singlemode fibers

Factory-terminated and tested for instant field connections giving guaranteed quality and performance

MPO-MPO array trunks are constructed with 3.0 mm PmP array cords

SYSTIMAX ULL MPO/LC Array Cords

TeraSPEED singlemode or multimode 12 fiber MPO connectors ensure fast and simple connections

Available in LazrSPEED 550 OM4 and LazrSPEED 550 OM5 Wideband multimode fibers

Factory-terminated and tested trunk cables provide superior quality and performance for field connections

MPO-LC array fanouts are constructed with 1.6 mm reinforced zipcord furcation tubing for outstanding durability and dependability

Array fanouts available with multiple breakout lengths for simple installation



Cable assemblies in the table below fit to:



SYSTIMAX ULL MPO Array Cords

1 U	2 R	3 X	4 M	5 X	6 M	7 X	8 G	9 D	10 -	11 M	12 E	13 F	14-16 010
Construction type U Ultra-Low Loss	Cable family R LSZH array Q Plenum	Fiber type G TeraSPEED singlemode (A2) X LazrSPEED 550 multimode V LazrSPEED OM5 WB multimode	Connector 1 MX 12f MPO (pinned)		Connector 2 MX 12f MPO (pinned)		Cordage size G 12-fiber PmP Array Cord	Fiber count D 12-fiber	Color M Aqua N Lime green J Yellow LazrSPEED OM4 standard is aqua LazrSPEED OM5 standard is lime green TeraSPEED singlemode standard is yellow		Breakout length D 12 in breakout, no gland E 24 in breakout, no gland H 48 in breakout, no gland L 72 in breakout, no gland P 96 in breakout, no gland A No gland, no breakout	Unit of measure F Feet M Meter	Length minimal length based on breakout 12 in 3-999 ft 24 in 4-999 ft 48 in 6-999 ft 72 in 8-999 ft 96 in 10-999 ft 12 in 1-305 m 24-48 in 2-305 m 72 in 3-305 m 96 in 4-305 m Total length includes the breakout

*2P, 2X and 2C only available for multimode fiber



Cable assemblies in the table below fit to:



Propel MPO-12 Singlemode and Multimode Patch Cords

1 U	2 O	3 X	4 M	5 P	6 M	7 P	8 U	9 D	10 -	11 M	12 A	13 F	14-16 003
Construction type U Ultra-Low Loss	Cable family Q Plenum Array R Dual Rated (OFNR/LSZH)	Fiber type G Singlemode (A2) X OM4 Multimode V OM5 WB Multimode	Connector 1 MP 12f MPO (Non-pinned)		Connector 2 MP 12f MPO (Non-pinned)		Cordage size U 12f PmP Array Cord, 2 mm	Fiber count D 12-fiber	Color M Aqua N Lime green J Yellow		Breakout length A No gland	Unit of measure F Feet M Meter	Length 003-999 ft 001-305 m

Note: For MPO-8, MPO-16, and MPO-24 products and other trunk configurations please contact your CommScope sales representative.

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Review Pre-terminated 19-in. Fiber System Selection here.



Cable assemblies in the table below fit to:



SYSTIMAX ULL MPO/LC Ruggedized Fan Out Cables

1 U	2 N	3 X	4 M	5 P	6 L	7 C	8 G	9 D	10 -	11 M	12 E	13 F	14-16 010
Construction type U Ultra-Low Loss	Cable family N LSZH array L Plenum	Fiber type G TeraSPEED singlemode (A2) X LazrSPEED 550 multimode V LazrSPEED OM5 WB multimode	Connector 1 MP 12f MPO (unpinned)	Connector 2 LC LC connector	Cordage size G 12-fiber PmP Array Cord		Fiber count D 12-fiber	Color M Aqua N Lime green J Yellow LazrSPEED OM4 standard is aqua LazrSPEED OM5 standard is lime green TeraSPEED singlemode standard is yellow			Breakout length D 12 in breakout, no gland E 24 in breakout, no gland H 48 in breakout, no gland L 72 in breakout, no gland P 96 in breakout, no gland	Unit of measure F Feet M Meter	Length minimal length based on breakout 12 in 3-999 ft 24 in 4-999 ft 48 in 6-999 ft 72 in 8-999 ft 96 in 10-999 ft 12 in 1-305 m 24-48 in 2-305 m 72 in 3-305 m 96 in 4-305 m Other lengths available



Cable assemblies in the table below fit to:



Propel MPO-12 Singlemode and Multimode Array Cords

1 U	2 Q	3 G	4 M	5 P	6 L	7 U	8 U	9 D	10 -	11 M	12 D	13 F	14-16 003
Construction type U Ultra-Low Loss	Cable family Q Plenum Array R Dual Rated (OFNR/LSZH)	Fiber type G Singlemode (A2) X OM4 Multimode V OM5 WB Multimode	Connector 1 MP 12f MPO (Non-pinned) MX 12f MPO (Pinned)	Connector 2 LU LC Uniboot	Cordage size U 12f PmP Array Cord, 2 mm		Fiber count D 12-fiber	Color M Aqua N Lime green			Breakout length D 12" E 24" H 48" L 72"	Unit of measure F Feet M Meter	Length 12 in 3-999 ft 24 in 4-999 ft 48 in 6-999 ft 72 in 8-999 ft 12 in 1-305 m 24-48 in 2-305 m 72 in 3-305 m

Note: For MPO-8, MPO-16, and MPO-24 products and other trunk configurations please contact your CommScope sales representative.

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Review Pre-terminated 19-in. Fiber System Selection here.

All cable assemblies on this page fit to:

EPX
HD
Propel
Evolve Mixed Media



SYSTIMAX ULL LC-LC Pre-terminated Array Cords

LC/LC trunks, 24 f	Patch Cord Type	Jacket Material	Fiber Type	Description Code	Part Number
LC/LC Microdistribution-cable, 12 x LC Duplex uniboot on each side, flexible cable construction, OD 3 mm	N/A	LSZH/Riser	OM4	URXLULUHF	URXLULUHF
LC/LC Microdistribution-cable, 12 x LC Duplex uniboot on each side, flexible cable construction, OD 3 mm	N/A	LSZH/Riser	OM5	URVLULUHF	URVLULUHF
LC/LC Microdistribution-cable, 12 x LC Duplex uniboot on each side, flexible cable construction, OD 3 mm	N/A	LSZH/Riser	OS2	FRWLULUHF	FRWLULUHF

SYSTIMAX ULL Patch Cords

Patch Cords	Patch Cord Type	Application	Fiber Type	Description Code	Part Number
Ultra Low Loss (ULL) LazrSPEED 550 OM4 LC Uniboot to LC Uniboot, Fiber Patch Cord, 1.5 mm Duplex, LSZH/Riser	LC-D to LC-D, 1.5 mm diameter, LSZH/Riser	Distribution/XC	OM4	UFXLULUK2	UFXLULUK2
Ultra Low Loss (ULL) LazrSPEED 550 WideBand OM5 LC Uniboot to LC Uniboot, Fiber Patch Cord, 1.5 mm Duplex, LSZH/Riser	LC-D to LC-D, 1.5 mm diameter, LSZH/Riser	Distribution/XC	OM5	UFVLULUK2	UFVLULUK2
Ultra Low Loss (ULL) TeraSPEED LC Uniboot to LC Uniboot, Fiber Patch Cord, 1.5 mm Duplex, LSZH/Riser	LC-D to LC-D, 1.5 mm diameter, LSZH/Riser	Distribution/XC	OS2	UFGLULUK2	UFGLULUK2
Ultra Low Loss (ULL) LazrSPEED 550 OM4 LC Uniboot to LC Uniboot, Fiber Patch Cord, 2.0 mm Duplex, LSZH/Riser	LC-D to LC-D, 2 mm diameter, LSZH/Riser	Equipment Area	OM4	UFXLULU62	UFXLULU62
Ultra Low Loss (ULL) LazrSPEED 550 WideBand OM5 LC Uniboot to LC Uniboot, Fiber Patch Cord, 2.0 mm Duplex, LSZH/Riser	LC-D to LC-D, 2 mm diameter, LSZH/Riser	Equipment Area	OM5	UFVLULU62	UFVLULU62
Ultra Low Loss (ULL) TeraSPEED LC Uniboot to LC Uniboot, Fiber Patch Cord, 2.0 mm Duplex, LSZH/Riser	LC-D to LC-D, 2 mm diameter, LSZH/Riser	Equipment Area	OS2	UFGLULU62	UFGLULU62
Ultra Low Loss (ULL) LazrSPEED 550 OM4 MPO/8 (Unpinned) to MPO/8 (Unpinned), 8-Fiber, LSZH/Riser	MPO-MPO, unpinned, 8 fibers, LSZH/Riser	Distribution or Equipment Area	OM4	URXQPQPJ8	URXQPQPJ8
Ultra Low Loss (ULL) LazrSPEED 550 WideBand OM5 MPO/8 (Unpinned) to MPO/8 (Unpinned), 8-Fiber, LSZH/Riser	MPO-MPO, unpinned, 8 fibers, LSZH/Riser	Distribution or Equipment Area	OM5	URVQPQPJ8	URVQPQPJ8
Ultra Low Loss (ULL) TeraSPEED MPO/8 (Unpinned) to MPO/8 (Unpinned), 8-Fiber, LSZH/Riser	MPO-MPO, unpinned, 8 fibers, LSZH/Riser	Distribution or Equipment Area	OS2	URGQPQPJ8	URGQPQPJ8

Fiber Cleaning	Part Number
Fiber Optic MTP/MPO One Slot Reel Cleaner	1918802-1
One slot reel cleaner for 1.25 mm and 2.5 mm ferrule connectors, MPO/MTP without pins (female), and MT-RJ without pins (female)	1918803-1
Fiber Optic MTP/MPO IBC (In Bulkhead Cleaner)	1918809-1
Fiber Optic SC IBC (In Bulkhead Cleaner)	2064499-1
Fiber Optic LC IBC (In Bulkhead Cleaner)	2064500-1
Cleaning and Inspection Kit, Fiber Optic	760053199
Cleaning Consumables Kit, Fiber Optic	760053207



Fiber Optic Cleaning and Inspection Kit

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Review Pre-terminated 19-in. Fiber System Selection here.

All cable assemblies on this page fit to:

EPX
HD
Propel
Evolve Mixed Media



SYSTIMAX ULL LC-LC Pre-terminated Array Cords

LC/LC trunks, 24 f	Patch Cord Type	Jacket Material	Fiber Type	Description Code	Part Number
LC/LC Microdistribution-cable, 12 x LC Duplex uniboot on each side, flexible cable construction, OD 3 mm	N/A	Plenum	OM4	UQXLULUHF	UQXLULUHF
LC/LC Microdistribution-cable, 12 x LC Duplex uniboot on each side, flexible cable construction, OD 3 mm	N/A	Plenum	OM5	UQVLULUHF	UQVLULUHF
LC/LC Microdistribution-cable, 12 x LC Duplex uniboot on each side, flexible cable construction, OD 3 mm	N/A	Plenum	OS2	FQWLULUHF	FRWLULUHF

SYSTIMAX ULL Patch Cords

Patch Cords	Patch Cord Type	Application	Fiber Type	Description Code	Part Number
Ultra Low Loss (ULL) LazrSPEED 550 OM4 LC Uniboot to LC Uniboot, Fiber Patch Cord, 1.5 mm Duplex, Plenum	LC-D to LC-D, 1.5 mm diameter, Plenum	Distribution/XC	OM4	UDXLULUK2	UDXLULUK2
Ultra Low Loss (ULL) LazrSPEED 550 WideBand OM5 LC Uniboot to LC Uniboot, Fiber Patch Cord, 1.5 mm Duplex, Plenum	LC-D to LC-D, 1.5 mm diameter, Plenum	Distribution/XC	OM5	UDVLULUK2	UDVLULUK2
Ultra Low Loss (ULL) TeraSPEED LC Uniboot to LC Uniboot, Fiber Patch Cord, 1.5 mm Duplex, Plenum	LC-D to LC-D, 1.5 mm, diameter, Plenum	Distribution/XC	OS2	UDGLLULUK2	UDGLLULUK2
Ultra Low Loss (ULL) LazrSPEED 550 OM4 LC Uniboot to LC Uniboot, Fiber Patch Cord, 2.0 mm Duplex, Plenum	LC-D to LC-D, 2 mm, diameter, Plenum	Equipment Area	OM4	UDXLULU62	UDXLULU62
Ultra Low Loss (ULL) LazrSPEED 550 WideBand OM5 LC Uniboot to LC Uniboot, Fiber Patch Cord, 2.0 mm Duplex, Plenum	LC-D to LC-D, 2 mm	Equipment Area	OM5	UDVLULU62	UDVLULU62
Ultra Low Loss (ULL) TeraSPEED LC Uniboot to LC Uniboot, Fiber Patch Cord, 2.0 mm Duplex, Plenum	LC-D to LC-D, 2 mm, diameter, Plenum	Equipment Area	OS2	UDGLLULU62	UDGLLULU62
Ultra Low Loss (ULL) LazrSPEED 550 OM4 MPO/8 (Unpinned) to MPO/8 (Unpinned), 8-Fiber, Plenum	MPO-MPO, unpinned, 8 fibers, Plenum	Distribution or Equipment Area	OM4	UQXQPQPJ8	UQXQPQPJ8
Ultra Low Loss (ULL) LazrSPEED 550 WideBand OM5 MPO/8 (Unpinned) to MPO/8 (Unpinned), 8-Fiber, Plenum	MPO-MPO, unpinned, 8 fibers, Plenum	Distribution or Equipment Area	OM5	UQVQPQPJ8	UQVQPQPJ8
Ultra Low Loss (ULL) TeraSPEED MPO/8 (Unpinned) to MPO/8 (Unpinned), 8-Fiber, Plenum	MPO-MPO, unpinned, 8 fibers, Plenum	Distribution or Equipment Area	OS2	UQGQPQPJ8	UQGQPQPJ8

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure


MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information


MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



FACT-FACT Pre-Term

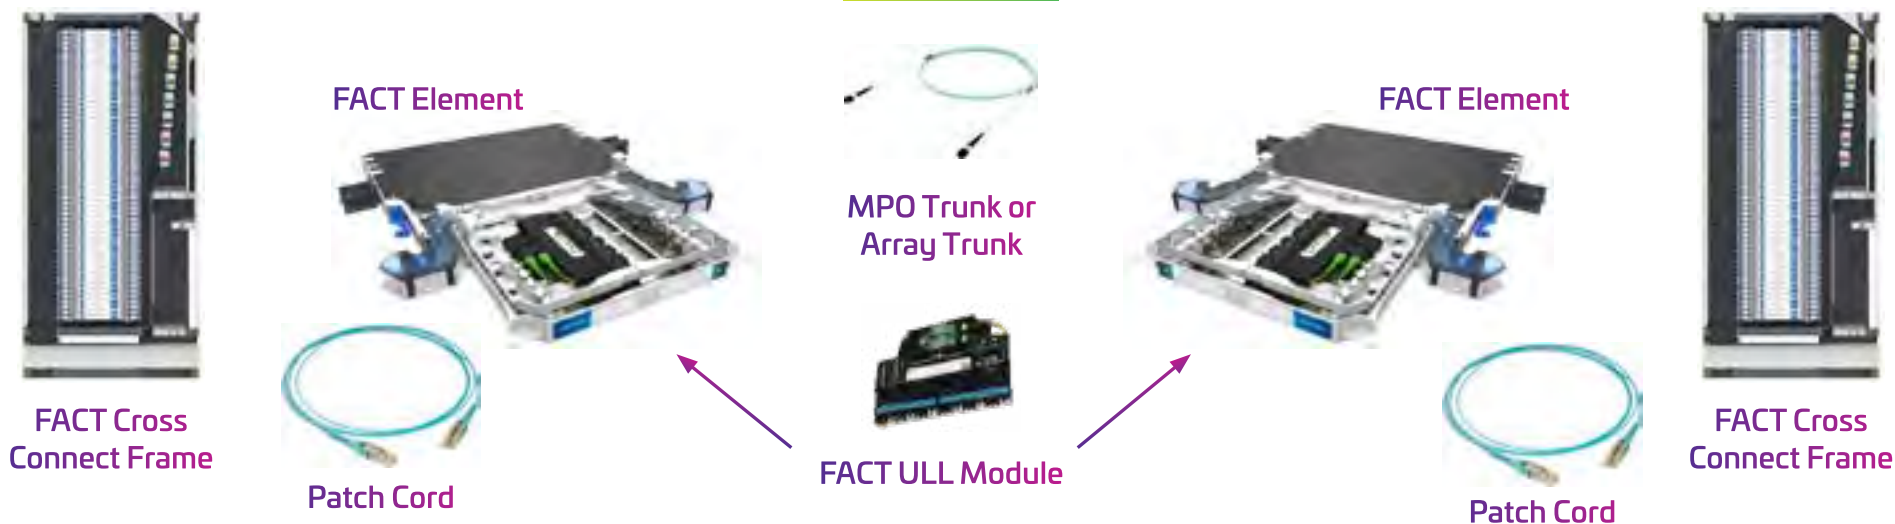

FACT-Panel Pre-Term

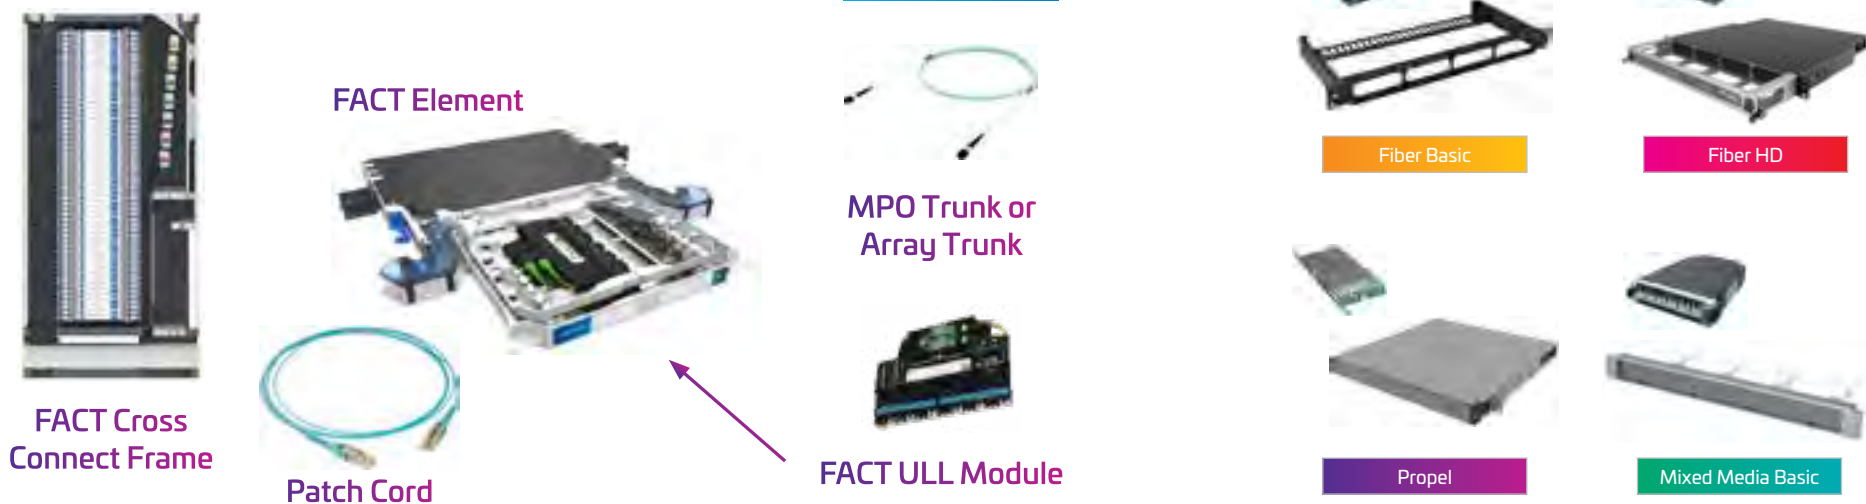

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Review Pre-terminated FACT ODF Fiber System Selection here.

FACT Frame		Description Code	Part Number		
FACT Cross Connect frame, patching on the right		FACT-FRCCRHP22	760243095		
FACT Cross Connect frame, patching on the Left		FACT-FRCLHP22	760243094		
FACT patch cord overlength management bay		FACT-FROLB22	760243097		
FACT Interconnect Frame – Right Hand Patch (2.2m)		FACT-FRICRHP22	760243096		
FACT Frame Accessories		Description Code	Part Number		
FACT Cross Connect door kit. Set of two doors with two door handles per door (one set per frame)		FACT-FRCCD22	760243098		
FACT Cross Connect side panel kit (pack of two side panels)		FACT-FRCCP22	760243099		
FACT Patch Cord Overlength Bay Door (2.2m)		FACT-FROLBD22	760243101		
FACT Interconnect Frame door kit		FACT-FRICD22	760243100		
FACT Fiber guide fixation kit		FACT-FRACCFGFS	760243110		
FACT-FRACCCAPL One cable attachment plate with one cable to flex conversion bracket included.		FACT-FRACCCAPL	760243108		
FACT-FRACCCTF One cable to flex conversion component set for cable attachment plate (one cable to flex component per cable)		FACT-FRACCCTF	760243111		
FACT-FRACCFOPL One fan out fixation plate for frame side duct & Eight fan out fixation component sets		FACT-FRACCFOPL	760243109		
Eight fan out fixation component sets (for fan out fixation plate) FACT		FACT-FRACCFOFK-8	760243112		
FACT Patch-Patch Elements and FACT NG4 Elements	Element Type	Fiber Count	Fiber Type	Description Code	Part Number
FACT Fiber Optic Patch Panel, blue, 6E high, 288-port simplex, multimode, OM4, holding 10 hinged trays loaded with LC/UPC adapters	Patch/Patch	288	OM4	FACT-6EPATL4	760240442
FACT Fiber Optic Patch Panel, blue, 6E high, 288-port simplex, singlemode, holding 10 hinged trays loaded with LC/UPC adapters	Patch/Patch	288	OS2	FACT-6EPATL1	760240441
FACT Fiber Optic Patch Panel, blue, 4E high, 192-port simplex, multimode, OM4, holding 8 hinged trays loaded with LC/UPC adapters	Patch/Patch	192	OM4	FACT-4EPATL4	760239995
FACT Fiber Optic Patch Panel, blue, 4E high, 192-port simplex, singlemode, holding 8 hinged trays loaded with LC/UPC adapters	Patch/Patch	192	OS2	FACT-4EPATL1	760239993
FACT Fiber Optic Patch Panel, blue, 3E high, 144-port simplex, multimode, OM4, holding 6 hinged trays loaded with LC/UPC adapters	Patch/Patch	144	OM4	FACT-3EPATL4	760239990
FACT Fiber Optic Patch Panel, blue, 3E high, 144-port simplex, singlemode, holding 6 hinged trays loaded with LC/UPC adapters	Patch/Patch	144	OS2	FACT-3EPATL1	760239988
FACT Fiber Optic Patch Panel, blue, 2E high, 96-port simplex, multimode, OM4, holding 4 hinged trays loaded with LC/UPC adapters	Patch/Patch	96	OM4	FACT-2EPATL4	760239984
FACT Fiber Optic Patch Panel, blue, 2E high, 96-port simplex, singlemode, holding 4 hinged trays loaded with LC/UPC adapters	Patch/Patch	96	OS2	FACT-2EPATL1	760239982
FACT Fiber Optic Patch Panel, blue, 1E high, 48-port simplex, multimode, OM4, holding 2 hinged trays loaded with LC/UPC adapters	Patch/Patch	48	OM4	FACT-1EPATL4	760240416
FACT Fiber Optic Patch Panel, blue, 1E high, 48-port simplex, singlemode, holding 2 hinged trays loaded with LC/UPC adapters	Patch/Patch	48	OS2	FACT-1EPATL1	760240414
FACT NG4 Fiber Panel, with 12 unloaded trays, blue, 6E high, for holding 12 NG4 MPO modules	NG4 Module	288	Universal	FACT-6ENG4	760242087
FACT NG4 Fiber Panel, with 8 unloaded trays, blue, 4E high, for holding 8 NG4 MPO modules	NG4 Module	192	Universal	FACT-4ENG4	760239978
FACT NG4 Fiber Panel, with 6 unloaded trays, blue, 3E high, for holding 6 NG4 MPO modules	NG4 Module	144	Universal	FACT-3ENG4	760239977
FACT NG4 Fiber Panel, with 4 unloaded trays, blue, 2E high, for holding 4 NG4 MPO modules	NG4 Module	96	Universal	FACT-2ENG4	760239976
FACT NG4 Fiber Panel, with 2 unloaded trays, blue, 1E high, for holding 2 NG4 MPO modules	NG4 Module	48	Universal	FACT-1ENG4	760239975
FACT NG4 Module	Cable Entrance	Fiber Type	Description Code		
FACT left sided ULL module, MPO24f to 12x LC-D, OM4	Left	OM4	FACT-MMDLC2-B		
FACT right sided ULL module, MPO24f to 12x LC-D, OM4	Right	OM4	FACT-MMDRC2-B		
FACT left sided ULL module, MPO24f to 12x LC-D, OM5	Left	OM5	FACT-MMDL52-B		
FACT right sided ULL module, MPO24f to 12x LC-D, OM5	Right	OM5	FACT-MMDR52-B		
FACT left sided ULL module, 2 x MPO12f to 12x LC-D, OS2	Left	OS2	FACT-MMDLKE-B		
FACT right sided ULL module, 2 x MPO12f to 12x LC-D, OS2	Right	OS2	FACT-MMDRKE-B		

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Review Pre-terminated FACT ODF Fiber System Selection here.

All cable assemblies on this page fit to:

FACT-FACT Pre-Term

FACT-Panel Pre-Term



SYSTIMAX ULL MPO-12 Trunk Cables

SYSTIMAX ULL Pre-terminated Trunk Cables

12-fiber MPO connector-based modules available in LazrSPEED 550 OM4 and LazrSPEED OM5 Wideband multimode fiber solutions

12-fiber MPO connector-based modules available in TeraSPEED singlemode fiber solutions

Factory-terminated and tested trunk cables provide superior quality and performance for field connections

Reliable transmit-to-receive connectivity using Method B Enhanced polarity maintenance maximizes administrative convenience

Simplified reconfiguration for moves, adds and changes (MACs)

Easy upgrade path to parallel transmission and associated applications, and increased value of existing infrastructure

SYSTIMAX ULL trunks are provisioned with pins to interface with G2 and EHD ULL modules (without pins)

1 U	2 3	3 X	4 5 M X	6 7 M X	8 A	9 10 11 K - M	12 A	13 F	14-16 010	
Construction type U Ultra-Low Loss	Family G Trunk, Plenum J Trunk, LSZH/Riser	Fiber type G TeraSPEED singlemode (A2) X LazrSPEED 550 multimode V LazrSPEED OM5 WB multimode	Termination end A MX MPO (pinned)	Termination end B MX MPO (pinned)	Construction A 12 Fiber PmP	Fiber count D 12-fiber F 24-fiber H 48-fiber K 72-fiber L 96-fiber M 144-fiber	Color M Aqua N Lime green J Yellow LazrSPEED OM4 standard is aqua LazrSPEED OM5 standard is lime green TeraSPEED singlemode standard is yellow	Options A No gland, 33-in. breakout Use accessory gland for patch cords in case gland is required on one side only	Unit of measure F Feet M Meter	Length 010-999 Feet 003-305 Meter

Note: for MPO-8 products and other trunk configurations please contact your CommScope sales representative.

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Review Pre-terminated FACT ODF Fiber System Selection here.

All cable assemblies on this page fit to:

FACT-FACT Pre-Term

FACT-Panel Pre-Term



SYSTIMAX ULL MPO Array Cords

SYSTIMAX ULL MPO Array Cords

12-fiber MPO connector-based modular design enables simple connections

Array cords are constructed with 550 OM4 and OM5 Wideband and singlemode fibers

Factory-terminated and tested for instant field connections giving guaranteed quality and performance

MPO-MPO arrays are constructed with 3.0 mm PmP array cords

1 U	2 Q	3 X	4 M	5 X	6 M	7 X	8 G	9 D	10 -	11 M	12 E	13 F	14-16 O10
Construction type U Ultra-Low Loss	Cable family R LSZH Q Plenum	Fiber type G TeraSPEED singlemode (A2) X LazrSPEED 550 multimode V LazrSPEED OM5 WB multimode	Connector 1 MX 12f MPO (pinned)	Connector 2 MX 12f MPO (pinned)	Cordage size G 12-fiber PmP Array Cord	Fiber count D 12-fiber	Color M Aqua N Lime green J Yellow	Breakout length A No gland, no breakout	Unit of measure F Feet M Meter	Length minimal length based on breakout 12 in 3-999 ft 24 in 4-999 ft 48 in 6-999 ft 72 in 8-999 ft 96 in 10-999 ft			
							LazrSPEED OM4 standard is aqua LazrSPEED OM5 standard is lime green TeraSPEED singlemode standard is yellow	Use accessory gland for patch cords in case gland is required on one side only.		12 in 1-305 m 24-48 in 2-305 m 72 in 3-305 m 96 in 4-305 m			
										Total length includes the breakout			

Note: for MPO-8 products and other trunk configurations please contact your CommScope sales representative.

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Review Pre-terminated FACT ODF Fiber System Selection here.



SYSTIMAX ULL LC-LC Pre-terminated Array Cords

LC/LC trunks, 24 f	Patch Cord Type	Jacket Material	Fiber Type	Description Code	Part Number
LC/LC Microdistribution-cable, 12 x LC Duplex uniboot on each side, flexible cable construction, OD 3 mm	N/A	LSZH/Riser	OM4	URXLULUHF	URXLULUHF
LC/LC Microdistribution-cable, 12 x LC Duplex uniboot on each side, flexible cable construction, OD 3 mm	N/A	LSZH/Riser	OM5	URVLULUHF	URVLULUHF
LC/LC Microdistribution-cable, 12 x LC Duplex uniboot on each side, flexible cable construction, OD 3 mm	N/A	LSZH/Riser	OS2	FRWLULUHF	FRWLULUHF

SYSTIMAX ULL Patch Cords

Patch Cords	Patch Cord Type	Application	Fiber Type	Description Code	Part Number
Ultra Low Loss (ULL) LazrSPEED 550 OM4 LC Uniboot to LC Uniboot, Fiber Patch Cord, 1.5 mm Duplex, LSZH/Riser	LC-D to LC-D, 1.5 mm diameter, LSZH/Riser	Distribution/XC	OM4	UFXLULUK2	UFXLULUK2
Ultra Low Loss (ULL) LazrSPEED 550 WideBand OM5 LC Uniboot to LC Uniboot, Fiber Patch Cord, 1.5 mm Duplex, LSZH/Riser	LC-D to LC-D, 1.5 mm diameter, LSZH/Riser	Distribution/XC	OM5	UFVLULUK2	UFVLULUK2
Ultra Low Loss (ULL) TeraSPEED LC Uniboot to LC Uniboot, Fiber Patch Cord, 1.5 mm Duplex, LSZH/Riser	LC-D to LC-D, 1.5 mm diameter, LSZH/Riser	Distribution/XC	OS2	UFGLULUK2	UFGLULUK2
Ultra Low Loss (ULL) LazrSPEED 550 OM4 LC Uniboot to LC Uniboot, Fiber Patch Cord, 2.0 mm Duplex, LSZH/Riser	LC-D to LC-D, 2 mm diameter, LSZH/Riser	Equipment Area	OM4	UFXLULU62	UFXLULU62
Ultra Low Loss (ULL) LazrSPEED 550 WideBand OM5 LC Uniboot to LC Uniboot, Fiber Patch Cord, 2.0 mm Duplex, LSZH/Riser	LC-D to LC-D, 2 mm diameter, LSZH/Riser	Equipment Area	OM5	UFVLULU62	UFVLULU62
Ultra Low Loss (ULL) TeraSPEED LC Uniboot to LC Uniboot, Fiber Patch Cord, 2.0 mm Duplex, LSZH/Riser	LC-D to LC-D, 2 mm diameter, LSZH/Riser	Equipment Area	OS2	UFGLULU62	UFGLULU62
Ultra Low Loss (ULL) LazrSPEED 550 OM4 MPO/8 (Unpinned) to MPO/8 (Unpinned), 8-Fiber, LSZH/Riser	MPO-MPO, unpinned, 8 fibers, LSZH/Riser	Distribution or Equipment Area	OM4	URXQPQPJ8	URXQPQPJ8
Ultra Low Loss (ULL) LazrSPEED 550 WideBand OM5 MPO/8 (Unpinned) to MPO/8 (Unpinned), 8-Fiber, LSZH/Riser	MPO-MPO, unpinned, 8 fibers, LSZH/Riser	Distribution or Equipment Area	OM5	URVQPQPJ8	URVQPQPJ8
Ultra Low Loss (ULL) TeraSPEED MPO/8 (Unpinned) to MPO/8 (Unpinned), 8-Fiber, LSZH/Riser	MPO-MPO, unpinned, 8 fibers, LSZH/Riser	Distribution or Equipment Area	OS2	URGQPQPJ8	URGQPQPJ8

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Review Pre-terminated FACT ODF Fiber System Selection here.



SYSTIMAX ULL LC-LC Pre-terminated Array Cords

LC/LC trunks, 24 f	Patch Cord Type	Jacket Material	Fiber Type	Description Code	Part Number
LC/LC Microdistribution-cable, 12 x LC Duplex uniboot on each side, flexible cable construction, OD 3 mm	N/A	Plenum	OM4	UQXLULUHF	UQXLULUHF
LC/LC Microdistribution-cable, 12 x LC Duplex uniboot on each side, flexible cable construction, OD 3 mm	N/A	Plenum	OM5	UQVLULUHF	UQVLULUHF
LC/LC Microdistribution-cable, 12 x LC Duplex uniboot on each side, flexible cable construction, OD 3 mm	N/A	Plenum	OS2	FQWLULUHF	FRWLULUHF

SYSTIMAX ULL Patch Cords

Patch Cords	Patch Cord Type	Application	Fiber Type	Description Code	Part Number
Ultra Low Loss (ULL) LazrSPEED 550 OM4 LC Uniboot to LC Uniboot, Fiber Patch Cord, 1.5 mm Duplex, Plenum	LC-D to LC-D, 1.5 mm diameter, Plenum	Distribution/XC	OM4	UDXLULUK2	UDXLULUK2
Ultra Low Loss (ULL) LazrSPEED 550 WideBand OM5 LC Uniboot to LC Uniboot, Fiber Patch Cord, 1.5 mm Duplex, Plenum	LC-D to LC-D, 1.5 mm diameter, Plenum	Distribution/XC	OM5	UDVLULUK2	UDVLULUK2
Ultra Low Loss (ULL) TeraSPEED LC Uniboot to LC Uniboot, Fiber Patch Cord, 1.5 mm Duplex, Plenum	LC-D to LC-D, 1.5 mm, diameter, Plenum	Distribution/XC	OS2	UDGLLULUK2	UDGLLULUK2
Ultra Low Loss (ULL) LazrSPEED 550 OM4 LC Uniboot to LC Uniboot, Fiber Patch Cord, 2.0 mm Duplex, Plenum	LC-D to LC-D, 2 mm, diameter, Plenum	Equipment Area	OM4	UDXLULU62	UDXLULU62
Ultra Low Loss (ULL) LazrSPEED 550 WideBand OM5 LC Uniboot to LC Uniboot, Fiber Patch Cord, 2.0 mm Duplex, Plenum	LC-D to LC-D, 2 mm	Equipment Area	OM5	UDVLULU62	UDVLULU62
Ultra Low Loss (ULL) TeraSPEED LC Uniboot to LC Uniboot, Fiber Patch Cord, 2.0 mm Duplex, Plenum	LC-D to LC-D, 2 mm, diameter, Plenum	Equipment Area	OS2	UDGLLULU62	UDGLLULU62
Ultra Low Loss (ULL) LazrSPEED 550 OM4 MPO/8 (Unpinned) to MPO/8 (Unpinned), 8-Fiber, Plenum	MPO-MPO, unpinned, 8 fibers, Plenum	Distribution or Equipment Area	OM4	UQXQPQPJ8	UQXQPQPJ8
Ultra Low Loss (ULL) LazrSPEED 550 WideBand OM5 MPO/8 (Unpinned) to MPO/8 (Unpinned), 8-Fiber, Plenum	MPO-MPO, unpinned, 8 fibers, Plenum	Distribution or Equipment Area	OM5	UQVQPQPJ8	UQVQPQPJ8
Ultra Low Loss (ULL) TeraSPEED MPO/8 (Unpinned) to MPO/8 (Unpinned), 8-Fiber, Plenum	MPO-MPO, unpinned, 8 fibers, Plenum	Distribution or Equipment Area	OS2	UQGQPQPJ8	UQGQPQPJ8

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



FiberGuide[®] Raceway Systems



FiberGuide is a raceway system designed to protect and route fiber optic patch cords to and from fiber splice enclosures, fiber distribution frames, and fiber optic terminal devices. FiberGuide ensures a 2-in. minimum bend radius is maintained throughout the system. Tool-less, Snap-Fit® junctions, cover options, and Plenum Express Exit® drops significantly reduce the amount of time required for installation.

The FiberGuide system is a complete set of products designed and manufactured to ensure total off-frame protection and ease of use. Basic components include horizontal and vertical straight sections, horizontal and vertical elbows, downspouts, junctions, and numerous support hardware and flex-tube kits.

Speed of installation

FiberGuide systems feature a variety of products that allow for quick and easy installation. Express Exit drops as well as tool-less products including Snap-Fit junctions, snap-on covers and new-hinged cover options save valuable time for installers.

Speed of deployment

The Express Exit system enables new drops to be added or removed quickly and easily. A drop can be added into a fully loaded raceway in seconds—without cutting.

Raceway flexibility

FiberGuide features 38 support structures, over 75 fittings, multiple drop options, and several other components to suit any application you create.

Fiber protection

Our broadband expertise translates into maximum protection for your network. 2-in. minimum bend radius is maintained throughout the system regardless of the raceway size.

Strength and durability

One-hundred percent raceway reliability—stands up to any challenge.



Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----







Review additional FiberGuide products here.





4-in. x 6-in. FiberGuide System

Description	Part Number	
4x6 Horizontal Straight Section, 6-ft. long, yellow	FGS-MSHS-B	
4x6 Horizontal Stack Storage Section, yellow	FGS-MSHS-STOR-B	
4x6 Horizontal T, yellow	FGS-MHRT-B	
4x6 Horizontal Cross, yellow	FGS-MHXP-B	
4x6 Horizontal Elbow 90°, yellow	FGS-MH9E-B	
4x6 Down Spout, yellow	FGS-MDSP-B	
4x6 Trumpet Flare, yellow	FGS-MTRM-B	
4x6 Down Elbow 45°, yellow	FGS-MD4E-B	
4x6 Up Elbow 45°, yellow	FGS-MU4E-B	
4x6 Junction	FGS-MFAW-B	
4x6 End Cap, black	FGS-HMEC-B	

4-in. x 6-in. Supports

Description	Part Number	
L Bay Support Bracket	FGS-HLBK	
Center Support Bracket Kit (xx = size: 1/2-in., 5/8-in., 12 mm, 14 mm, 16 mm)	FGS-HTUB	
Top Support C-Bracket Kit (xx = size: 1/2-in., 5/8-in., 12 mm, 14 mm, 16 mm)	FGS-HNTS	
Unistrut Kit; 10 Quick Knob T-Bolt	FGS-ACC532	

Express Exits

Description	Part Number	
4-in. Express Exit with 4x4 exit opening, yellow	FGS-MEXP-E-A/B/F	
2-in. Low Profile Express Exit with 2x2 exit opening, yellow	FGS-MEXP-LP-A/B/F	
2x2 Trumpet Flare for 2-in. Express Exits, yellow	FGS-MTRM-C	
Single 2-in. Flex Tube Attachment 2-in. flex tube and 2x2 junction to attach to Express Exit		
5-ft. length	FGS-MEXI-C-5F	
10-ft. length	FGS-MEXI-C-10F	
15-ft. length	FGS-MEXI-C-15F	

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Review additional FiberGuide products here.

4-in. x 12-in. FiberGuide System

Description	Part Number	
4x12 Horizontal Straight Section, 6-ft. long, yellow	FGS-MSHS-F	
4x12 Horizontal Slack Storage Section, yellow	FGS-MSHS-STOR-F	
4x12 Horizontal T, yellow	FGS-MHRT-F	
4x12 Horizontal Cross, yellow	FGS-MHXP-F	
4x12 Horizontal Elbow 90°, yellow	FGS-MH9E-F	
4x12 Down Spout, yellow	FGS-MDSP-F	
4x12 Trumpet Flare, yellow	FGS-MTRM-F	
4x12 Horizontal Cross with two 6-in. exit, yellow	FGS-MHXP-B/F	
4x12 Down Elbow 45°, yellow	FGS-MD4E-F	
4x12 Up Elbow 45°, yellow	FGS-MU4E-F	
4x12 Junction	FGS-MFAW-F	
4x12 End Cap	FGS-HMEC-F	
Trapeze Bracket Kit (xx = size: 1/2-in., 5/8-in., 12 mm, 14 mm, 16 mm)	FGS-HNTP-F-XX	

4-in. x 24-in. FiberGuide System

Description	Part Number	
4x24 Horizontal Straight Section, 6-in. long, yellow	FGS-MSHS-H	
4x24 Horizontal T, with single 12-in. exit, yellow	FGS-MHRT-H/F	
4x24 Horizontal T with three 24-in. exits, yellow	FGS-MHRT-H	
4x24 Horizontal Cross, yellow	FGS-MHXP-H	
4x24 Horizontal Cross with dual 12-in. exits	FGS-MHXP-F/H	
4x24 Horizontal Elbow 45°, yellow	FGS-MH4E-H	
4x24 Down Elbow 45°, yellow	FGS-MD4E-H	
4x24 Up Elbow 45°, yellow	FGS-MU4E-H	
4x24 Junction	FGS-MFAW-H	
4x24 End Cap	FGS-HMEC-H	
Threaded Rod Trapeze Bracket Kit for New, 5/8-in.	FGS-HNTP-H-5/8	

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information


MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Category 6A Systems

Pre-terminated Field Installable Unshielded Shielded

Evolve U/UTP Panel, Field Installable		Copper Tech	Description Code	Part Number	
	SYSTIMAX GigaSPEED X10D Evolve 1U U/UTP Panel Kit	U/UTP	360-E-MOD-1U-24	760187187	
Evolve Mixed Media Panels		Copper Tech	Description Code	Part Number	
	SYSTIMAX GigaSPEED X10D and GigaSPEED XL Evolve 1U U/UTP Panel Kit	U/UTP	360-E-KIT-1U	760155739	
	SYSTIMAX GigaSPEED X10D Evolve 1U F/UTP Panel Kit	F/UTP	360-IPR-MFTP-E-HD6B-1U-24	760150144	
Evolve Mixed Media Panels Accessories		Description Code	Part Number		
SYSTIMAX 360 1100 Evolve G2 BEZEL (Cool Gray)		360-1100-E-FB-4PK	760175877		
SYSTIMAX 360 1100 Evolve Fiber Cable Management		361 1100-E-FCM	760175919		
SYSTIMAX 360 1100 Evolve G2 BEZEL (Blank)		360-1100-E-BB	760165191		
InstaPATCH Copper Trunks Pre-terminated		Copper Tech	Jacket Material	Description Code	Part Number
	InstaPATCH Cu U/UTP LSZH Pre-terminated Copper Cable, 360 1100 Evolve module to 360 1100 Evolve module, 6 links	U/UTP	LSZH	CCRRB-11SA08	CARRB-11SA08
	InstaPATCH Cu U/UTP Plenum Pre-terminated Copper Cable, 360 1100 Evolve module to 360 1100 Evolve module, 6 links	U/UTP	Plenum	CARRB-11SA08	CARRB-11SA08
	InstaPATCH Cu F/UTP LSZH Copper Cable, single row standard density outlet to single row standard density outlet, 6 links	F/UTP	LSZH	CFAAB-11SA08	CFAAB-11SA08
	InstaPATCH Cu F/UTP LSZH Copper Cable, single row standard density outlet to single row standard density outlet, 6 links	F/UTP	Plenum	CDAAB-11SA08	CDAAB-11SA08
Field Installable Category 6A Copper Cable		Copper Tech	Jacket Material	Description Code	Part Number
	GigaSPEED X10D 1091B ETL Verified Category 6A U/UTP Cable, slate jacket, 4 pair count, 1000 ft (305 m) length, WE TOTE® box	U/UTP	PVC	1091B SLT C6A 4/23 U/UTP W1000	760107078
	GigaSPEED X10D 2091B ETL Verified Category 6A U/UTP Cable, white jacket, 4 pair count, 1000 ft (305 m) length, WE TOTE box	U/UTP	Plenum	2091B WHT C6A 4/23 U/UTP W1000	760107268
	GigaSPEED X10D 3091B-C ETL Verified Category 6A U/UTP Cable, blue jacket, 4 pair count, 1000 ft (305 m) length, WE TOTE box	U/UTP	LSZH	3091B WHT C6A 4/23 U/UTP W1000	760107318
	GigaSPEED X10D 1291B ETL Verified Category 6A F/UTP Cable, non-plenum, blue jacket, 4 pair count, 1000 ft (305 m) length, reel	F/UTP	PVC	1291B BLU C6A 4/23 F/UTP R1000	760081364
	GigaSPEED X10D 2291B ETL Verified Category 6A F/UTP Cable, plenum, white jacket, 4 pair count, 1000 ft (305 m) length, reel	F/UTP	Plenum	2291B WHT C6A 4/23 F/UTP R1000	760122648
	GigaSPEED X10D 3291B Category 6A F/UTP Cable, low smoke zero halogen, white jacket, 4 pair count, 1000 ft (305 m) length, reel	F/UTP	LSZH	3291B WHT C6A 4/23 F/UTP R1000	760081323
Field Installable Category 6A Information Outlets		Cu Tech	Jacket Material	Description Code	Part Number
	GigaSPEED X10D MGS600 Series Information Outlet, black	UTP	N/A	MGS600-003	760092361
	GigaSPEED X10D HGS620 Shielded High Density Information Outlet	STP	N/A	HGS620	760152801
Copper Patch Cords		Copper Tech	Jacket Material	Description Code	Part Number
	MINo6A Series Category 6A U/UTP Reduced Diameter LS-CM Dual Rated Cord	U/UTP	LSZH/Riser	MINO6A-WH	C0199K2-08
	GigaSPEED X10D 360GS10E Solid Cordage Modular Patch Cord, Dark Grey Jacket	U/UTP	PVC	360GS10E-DG	CPCS5X2-03
	GigaSPEED X10D G10SP on S/FTP Low Smoke Zero Halogen Cordage, S/FTP Modular Patch Cord, White Jacket	S/FTP	LSZH/Riser	G10SP-L-WH	CA111K2-08
	GigaSPEED X10D G10SP on S/FTP Cordage, S/FTP Modular Patch Cord, Slate Jacket	S/FTP	PVC	G10SP-SL	CA111H2-0C

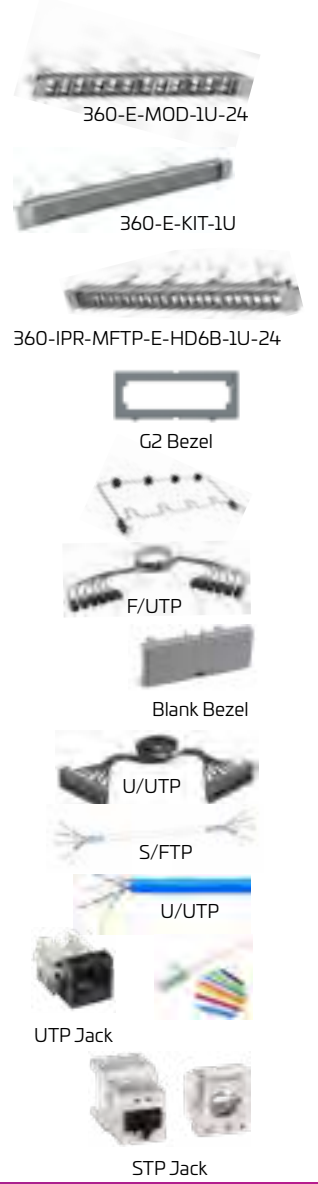

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Powered Fiber Systems



Application

Deployment of HD cameras, Wi-Fi access points, optical network terminals, small cells (picocells, femtocells, metrocells, etc.) and other network access devices can be difficult, especially in outdoor environments. Many of these devices accept a power over Ethernet (PoE) input for power and communications. However, the PoE distance limitation of 100 meters can cause difficulties with network planning.

Also, power is not always readily available in the precise locations where device placement is needed to improve 4G LTE and/or 802.11 Wi-Fi coverage for wireless networks, such as on the sides of buildings, lamp posts, etc. In these situations, it is typically necessary to run power to the desired location prior to installing the devices. Also, any concern about who pays for that power and how it is monitored requires wireless network operators to negotiate with local utility companies and building owners. All of this adds time and money to the installation of network access devices.

CommScope has developed a solution that combines power and optical fiber communications into one system, eliminating the hassles and extra expense associated with powering typical low-power network devices.


Features

- Hybrid optical fiber and copper cabling with outdoor and indoor/outdoor versions
- Incorporates dc/dc conversion technology to simplify dc line powering calculations
- Primary, secondary, and tertiary electrical protection
- Media converter for delivering PoE and PoE+ capability
- SELV and NEC Class 2 compliant

Applications

- Security cameras
- Wi-Fi access points

- Wireless network small cells
- Optical network terminals
- Digital signage
- Emergency phones
- Additional devices needing PoE signal

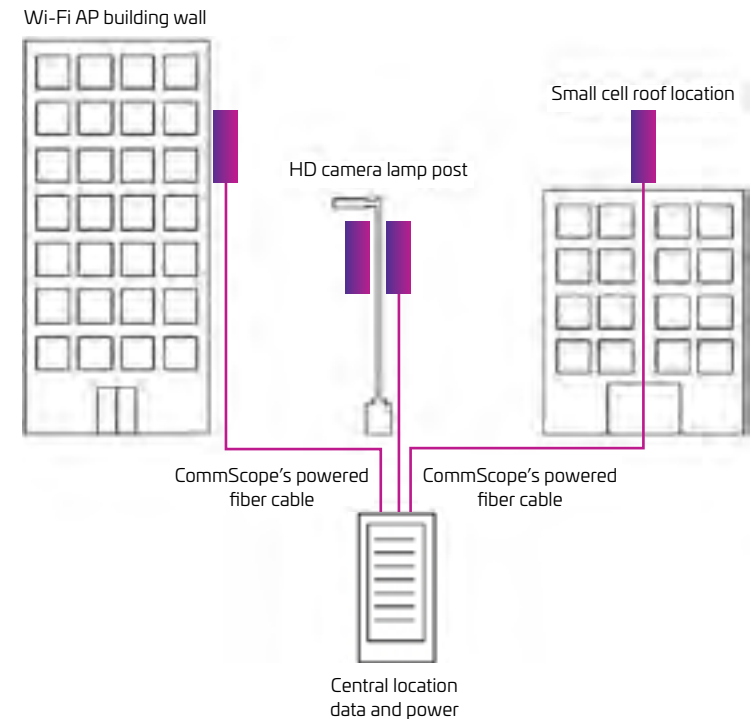

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



1- and 2-Port PoE Extenders

- IP68 sealing—Enclosures are designed for outdoor installations with protection from moisture and the environment.
- Automatically corrects for distance voltage drop in the hybrid cable.
- Integrated Electrical Protection
- 60W 2-port variant enables 2 PoE or PoE+ devices to be connected via one hybrid cable.
- 60W single port variation supports 802.3bt, Class 6 power levels. It can be equipped with SPF+ transceivers, and deliver 5 Gbps Ethernet over the copper port.

Power Supplies

- 57VDC Power Supply for use with Powered Fiber Cable System

Support Materials

- [Find calculators and component details here.](#)
- [Find installation tips for the power supply at the central location here.](#)

Powered Fiber Cables	Part Number/MID
Powered Fiber Cable, Indoor/Outdoor, OS2, 2 Fibers, 2 x 12 AWG Conductors	PFC-S02L12
Powered Fiber Cable, Indoor/Outdoor, OS2, 2 Fibers, 2 x 16 AWG Conductors	PFC-S02L16
Powered Fiber Cable, Outdoor, OS2, 2 Fibers, 2 x 12 AWG Conductors	PFC-S02O12
Powered Fiber Cable, Outdoor, OS2, 2 Fibers, 2 x 16 AWG Conductors	PFC-S02O16
Powered Fiber Cable, Indoor/Outdoor, OS2, 4 Fibers, 2 x 12 AWG Conductors	PFC-S04L12
Powered Fiber Cable, Indoor/Outdoor, OS2, 4 Fibers, 2 x 16 AWG Conductors	PFC-S04L16
Powered Fiber Cable, Outdoor, OS2, 4 Fibers, 2 x 12 AWG Conductors	PFC-S04O12
Powered Fiber Cable, Outdoor, OS2, 4 Fibers, 2 x 16 AWG Conductors	PFC-S04O16
Powered Fiber Cable, Indoor/Outdoor, OS2, 12 Fibers, 2 x 12 AWG Conductors	PFC-S12L12
Powered Fiber Cable, Indoor/Outdoor, OS2, 2 Fibers, 12 x 16 AWG Conductors	PFC-S12L16
Powered Fiber Cable, Outdoor, OS2, 12 Fibers, 2 x 12 AWG Conductors	PFC-S12O12
Powered Fiber Cable, Outdoor, OS2, 12 Fibers, 2 x 16 AWG Conductors	PFC-S12O16
Powered Fiber Cable, Indoor/Outdoor, OM3, 2 Fibers, 2 x 12 AWG Conductors	PFC-302L12
Powered Fiber Cable, Indoor/Outdoor, OM3, 2 Fibers, 2 x 16 AWG Conductors	PFC-302L16
Powered Fiber Cable, Outdoor, OM3, 2 Fibers, 2 x 12 AWG Conductors	PFC-302O12
Powered Fiber Cable, Outdoor, OM3, 2 Fibers, 2 x 16 AWG Conductors	PFC-302O16
Powered Fiber Cable, Indoor/Outdoor, OM3, 4 Fibers, 2 x 12 AWG Conductors	PFC-304L12
Powered Fiber Cable, Indoor/Outdoor, OM3, 4 Fibers, 2 x 16 AWG Conductors	PFC-304L16
Powered Fiber Cable, Outdoor, OM3, 4 Fibers, 2 x 12 AWG Conductors	PFC-304O12
Powered Fiber Cable, Outdoor, OM3, 4 Fibers, 2 x 16 AWG Conductors	PFC-304O16

1- and 2-Port PoE Extenders	Part Number/MID
60W, 2 Port PoE Extender (provides a maximum of 30W on each port)	PFU-P-C-O-060-02
60W, 1 Port 5 Gbps PoE Extender	PFU-P-E-O-060-01
Power Supplies	Part Number/MID
Power Express Distribution shelf with alarm module	PFP-PX-S1
Power Express Distribution module supports max. 8 Devices	PFP-PX-8M
Power Express Blank Slot Panel	PFP-PX-SF
SPS Rectifier Power Distribution Shelf	PFP-SPS-S1
1600W SPS Power Rectifier module	PFP-SPS-1600M
SPS Rectifier Controller Display	PFP-SPS-C1
SPS Rectifier Blank Slot Panel	PFP-SPS-SF



Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



DIN Rail Solutions for BMS Networks



A Building Management System (BMS), or Building Energy Management System (BEMS), supports the automatic centralized control of a building's HVAC (heating, ventilation and air conditioning), electrical, lighting, shading, access control, security systems, and other interrelated systems.

In addition to controlling the building's internal environment, BMS systems are sometimes linked to access control or other security systems such as closed-circuit television (CCTV), motion detectors, fire alarm systems, and elevators for monitoring.

Many of the devices used to enable the applications mentioned in the previous paragraph have a non-standard foot print, or are located in places where a traditional 19-in rack or cabinet cannot be placed. In this instance, DIN (Deutsche Instiut fur Normung), a rail-mounted metal strip system, is deployed to securely attach those electrical and industrial control products and sensors.



SMOUV Splice Protectors



Splice Holder Kit



Fiber Adapter Pack



DIN Rail



DIN Rail Mounting Bracket



Enclosure



Adapter Bracket



BMS Device



Copper Faceplate



Fiber Pig Tail



Copper Jack

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Review DIN Rail System Selection [here](#).

DIN Rail Mounting Bracket and Enclosure	Description Code	Part Number
DIN rail mounting bracket for WBE-EMT-BK-1P-PNL	WBE-1P-DIN-KIT	760239822
Ready Wall Mount Building Enclosure, 1P, black, cable gland not included	WBE-EMT-BK-1P-PNL	760172288
1000 Style to 360 Adapter Pack Bracket Kit (Kit of 3)	1000-360-ADPT-BRKT-KIT	760198325
Fiber Pigtails and Accessories	Description Code	Part Number
TeraSPEED LC/UPC to Unconnectorized, Fiber Pigtail, 0.9 mm Tight Buffer		FAWLCUC01
OM4 LC/UPC to Unconnectorized, 0.9 mm Tight Buffer Simplex Fiber Pigtail		FAXLCUC01
SYSTIMAX 360 Fusion Splice Holder Kit, stackable	360-SPLICE-24-FUS	760148536
Fiber Adapter Packs	Description Code	Part Number
360 Distribution Adapter Pack, Singlemode, 24 LC/UPC with internal shutters	360DPis-24LC-SM	760216762
360 Distribution Adapter Pack, Singlemode, 12 LC/UPC with internal shutters	360DPis-12LC-SM	760230946
360 Distribution Adapter Pack, Multimode OM4, 24 LC/UPC with internal shutters	360DPis-24LC-LS	760216754
360 Distribution Adapter Pack, Multimode OM4, 12 LC/UPC with internal shutters	360DPis-12LC-LS	760230938
Copper Faceplate and Jacks	Description Code	Part Number
G2 Multimedia Outlet Bezel for G2 Modular Shelf, Accepts 4 MGS Jacks	MODG2-MGS	760032110
C6A UTP GigaSPEED X10D MGS600 Series Information Outlet, black, quantity 1	MGS600-003	760092361
GigaSPEED XL MGS400 Series Category 6 U/UTP Information Outlet, black, quantity 1	MGS400-003	700206667

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Fiber Wall Boxes for Fiber Entrance Applications



Fiber Wall Boxes	Dimensions, mm (inches)	Description Code	Part Number
Wall Mount Building Enclosure configured for one G2 Style module, splice cassette or adapter pack, cable gland not included	139.7 x 262.64 x 35.81 (5.5 x 10.34 x 1.410)	WB2-EMT-BK-1P-MOD	760248900
Wall Mount Building Enclosure configured for two G2 Style modules, splice cassettes or adapter packs, cable gland not included	284.99 x 367.28 x 52.83 (11.22 x 14.46 x 2.08)	WB2-EMT-BK-2P-MOD	760248901
Wall Mount Building Enclosure configured for four G2 style modules, splice cassettes or adapter packs, cable gland not included	284.99 x 367.28 x 98.55 (11.22 x 14.46 x 3.88)	WB2-EMT-BK-4P-MOD	760248902
Wall Mount Building Enclosure configured for eight G2 Style modules, splice cassettes or adapter packs, cable gland not included	284.99 x 367.28 x 158.75 (11.22 x 14.46 x 6.25)	WB2-EMT-BK-8P-MOD	760248903



Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



2 Post Equipment Racks and Accessories



Equipment Racks	Material	Static Load Rating	Packaging Type and Weight (net)	Description Code	Part Number
Equipment Rack, 2-Post, 3 in (76 mm) Channel x 7ft (2134 mm) H - 19 in (482.6 mm) Alu (45U) 12-24 Tapped Rails, Black	Aluminium	453.6 kg	Flat Packed 12.7 kg	RK3-45A	760082479
Horizontal Cable Managers	Material	Color	Packaging Type and Weight (net)	Description Code	Part Number
Horizontal Trough Kit, 1 RU, 19 in, single sided	Aluminium, Steel	Black	Assembled 1.52 kg	HTK-19-SS-1U	760072942
Horizontal Trough Kit, 2 RU, 19 in, single sided	Aluminium, Steel	Black	Assembled 2.05 kg	HTK-19-SS-2U	760072959
Horizontal Trough Kit, 19 in rack mountable, double sided, 1 RU	Aluminium, Plastic, Steel	Black	Assembled	HTK-19-DS-1U	760128843
Horizontal Trough Kit, 19 in rack mountable, double sided, 2 RU	Aluminium, Plastic, Steel	Black	Assembled	HTK-19-DS-2U	760128850
Vertical Cable Managers, Silver	Material	Color	Packaging Type and Weight (net)	Description Code	Part Number
Vertical Cable Management Kit, 6 in x 84 in (152 mm x 2134 mm) Double Sided, With Doors	Metal	Silver	Assembled	VCM-DS-84-6	760244775
Vertical Cable Management Kit, 8 in x 84 in (203 mm x 2134 mm) Double Sided, With Doors	Metal	Silver	Assembled	VCM-DS-84-8	760244776
Vertical Cable Management Kit, 10 in x 84 in (254 mm x 2134 mm) Double Sided, With Doors	Metal	Silver	Assembled	VCM-DS-84-10	760244777
Vertical Cable Management Kit, 12 in x 84 in (305 mm x 2134 mm) Double Sided, With Doors	Metal	Silver	Assembled	VCM-DS-84-12	760244778
Vertical Cable Managers, Black	Material	Color	Packaging Type and Weight (net)	Description Code	Part Number
Vertical Cable Management Kit, 6 in x 84 in (152 mm x 2134 mm) Double Sided, With Doors	Metal	Black	Assembled	VCM-DS-84-6B	760244779
Vertical Cable Management Kit, 8 in x 84 in (203 mm x 2134 mm) Double Sided, With Doors	Metal	Black	Assembled 30.391 kg	VCM-DS-84-8B	760244780
Vertical Cable Management Kit, 10 in x 84 in (254 mm x 2134 mm) Double Sided, With Doors	Metal	Black	Assembled	VCM-DS-84-10B	760244781
Vertical Cable Management Kit, 12 in x 84 in (305 mm x 2134 mm) Double Sided, With Doors	Metal	Black	Assembled	VCM-DS-84-12B	760244782



Contact your local CommScope FAE for more details.

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



CommScope's imVision[®] Platform



Data drives your network. To keep it flowing efficiently and freely, your physical layer infrastructure must be managed in real-time, using authoritative information—not assumptions. Gaining the visibility and insights needed to make the right decisions gets tougher as networks converge and grow more complex. That's why CommScope created imVision, the industry's leading automated infrastructure management (AIM) platform.

With an intuitive, web-based architecture, imVision delivers real-time intelligence and device discovery that allow you to monitor and document your cabling infrastructure while tracking the location of all connected network devices. It delivers actionable, real-time data and performance insights that enable you to optimize capacity, availability and efficiency. The critical information you need from the technology partner you trust.

Optimize capacity

Today's networks are capacity-strained but often have resources that are not being utilized efficiently. A capacity upgrade is involved and costly and may even be unnecessary. How can you be sure?

Optimize availability

Nobody can afford a service disruption. Worse yet, is the cost to resolve unplanned downtime. The best way to lower the cost is to prevent service issues from ever happening.

Optimize efficiency

Nothing degrades network efficiency like stranded switch ports. Left unidentified, they continue to consume power and valuable white space. The cost and time needed to deploy and commission new servers is another efficiency-killer.

[Learn more about automated infrastructure management here.](#)

[Explore imVision case studies at commscope.com](#)



Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Colocation Campus and Building Infrastructure

Overview

Fiber Entrance and Meet-Me Room

High Fiber Count DC Interconnect


Campus Cabling

Building Cabling

Campus Cabling for Wi-Fi and Security



Select a cabling section for more information.

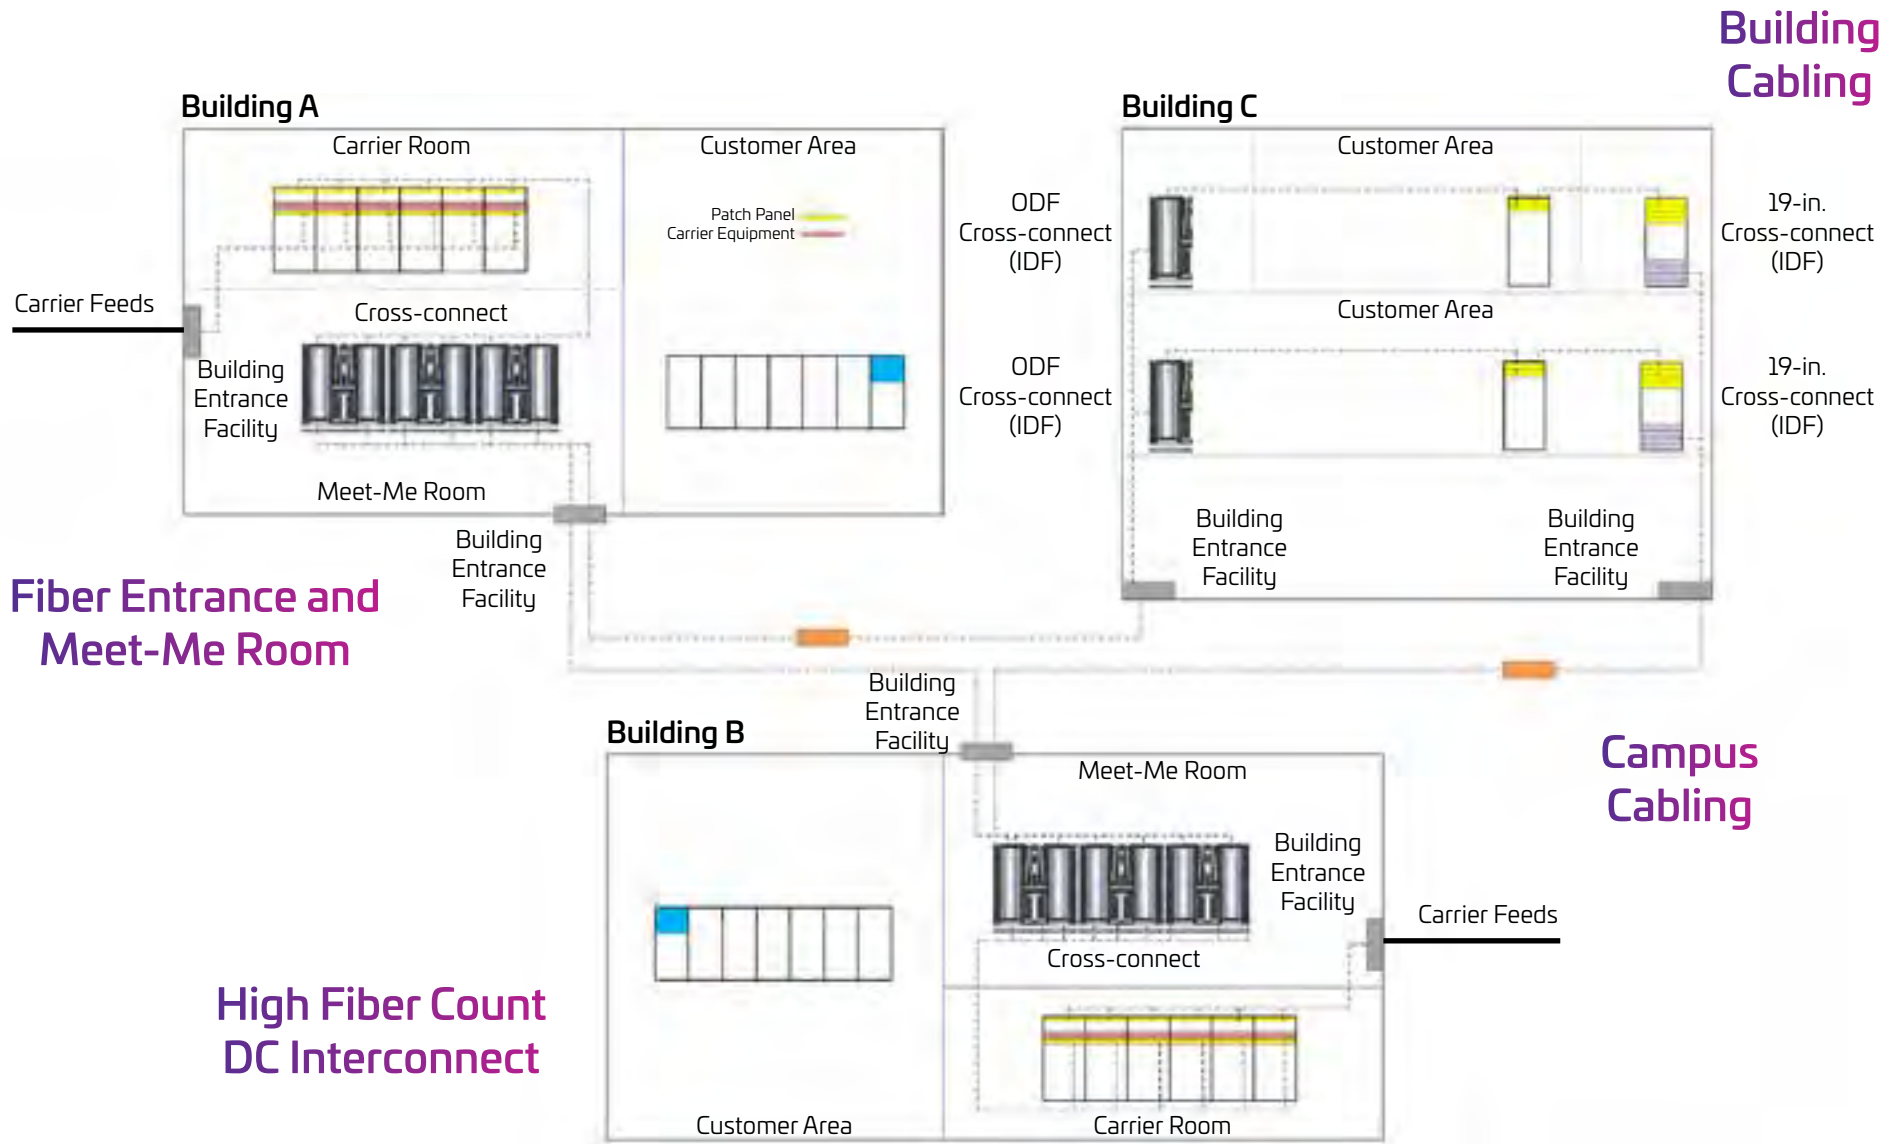

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure


MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Select a product for more information.

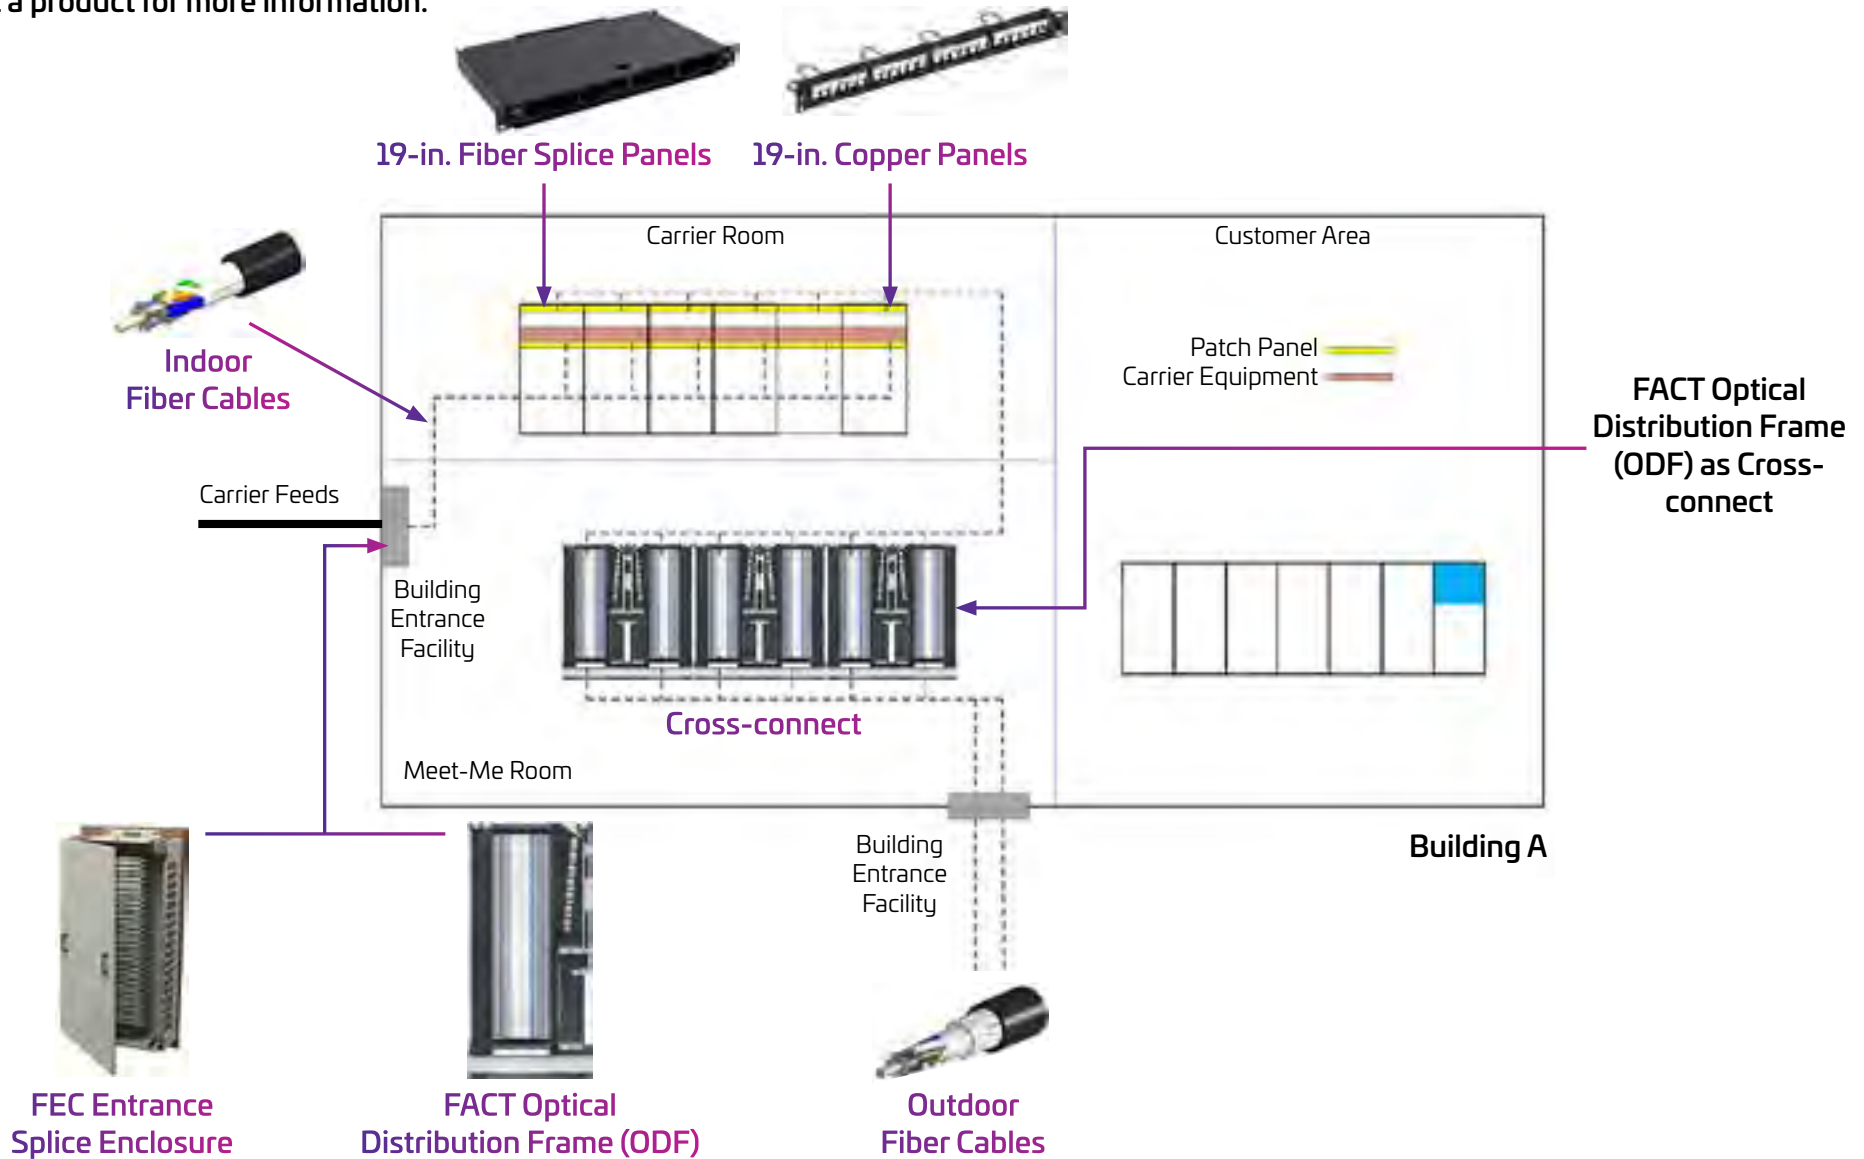

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure


MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Select a product for more information.

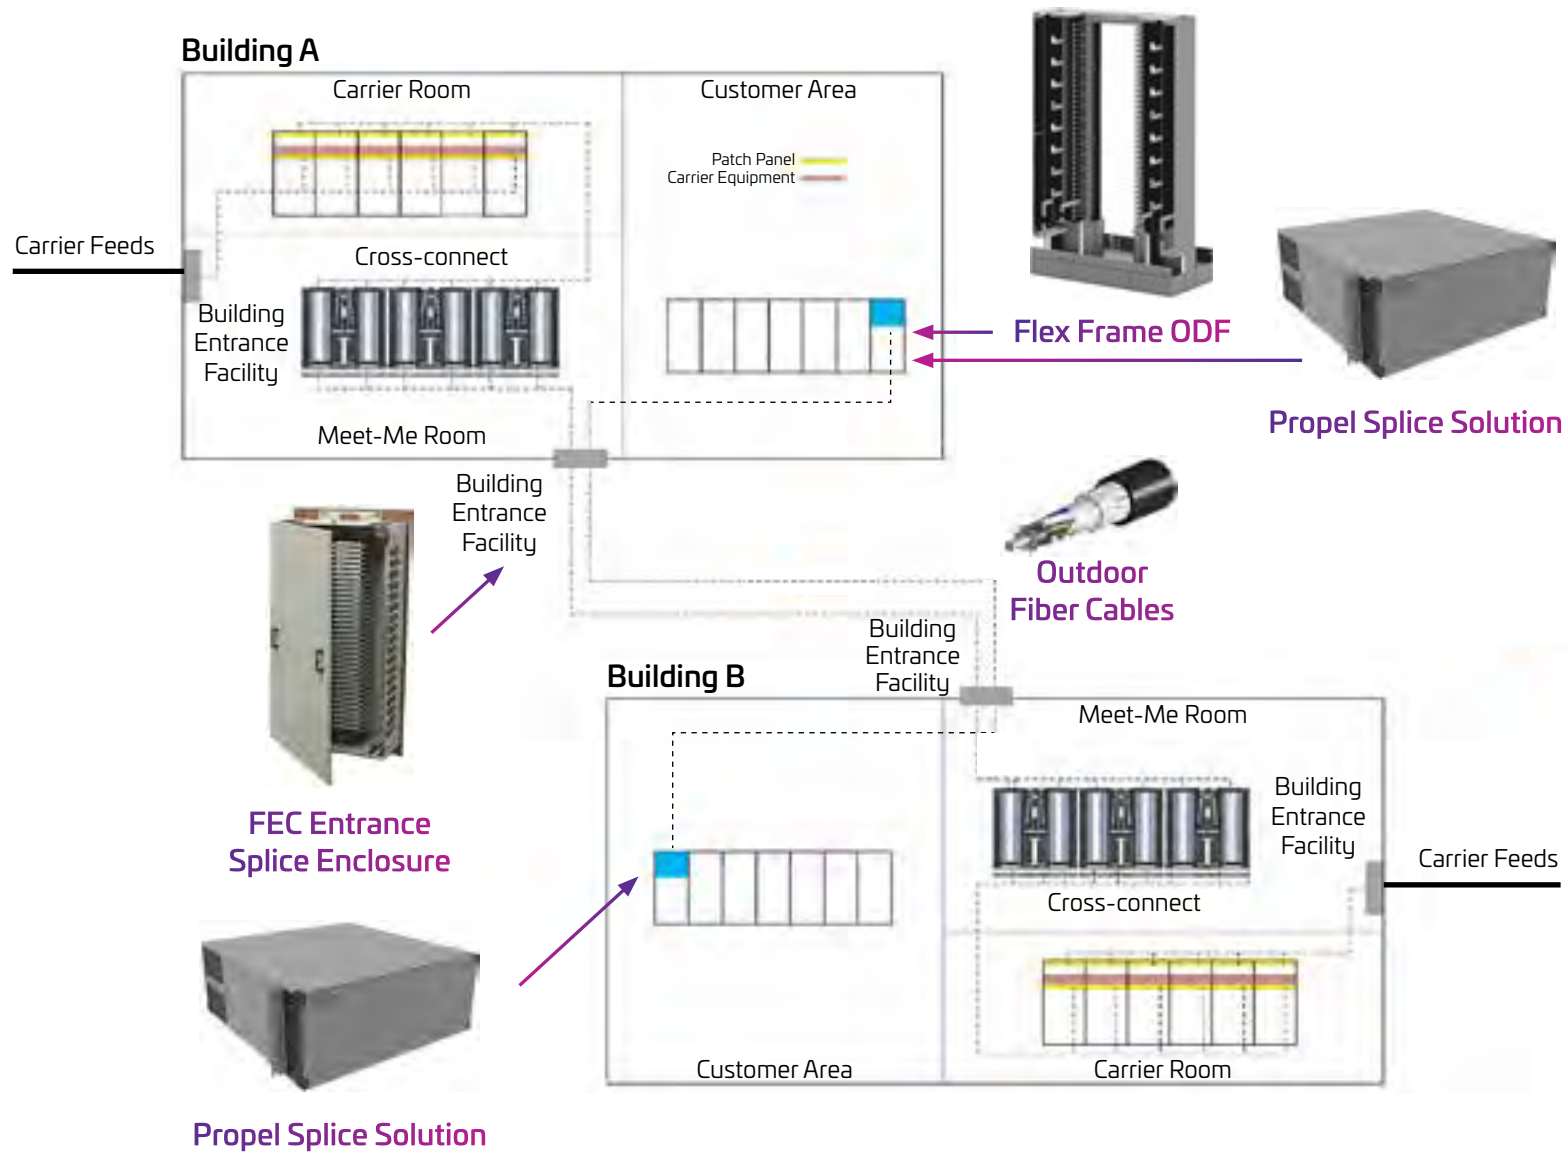

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure


MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Select a product for more information.

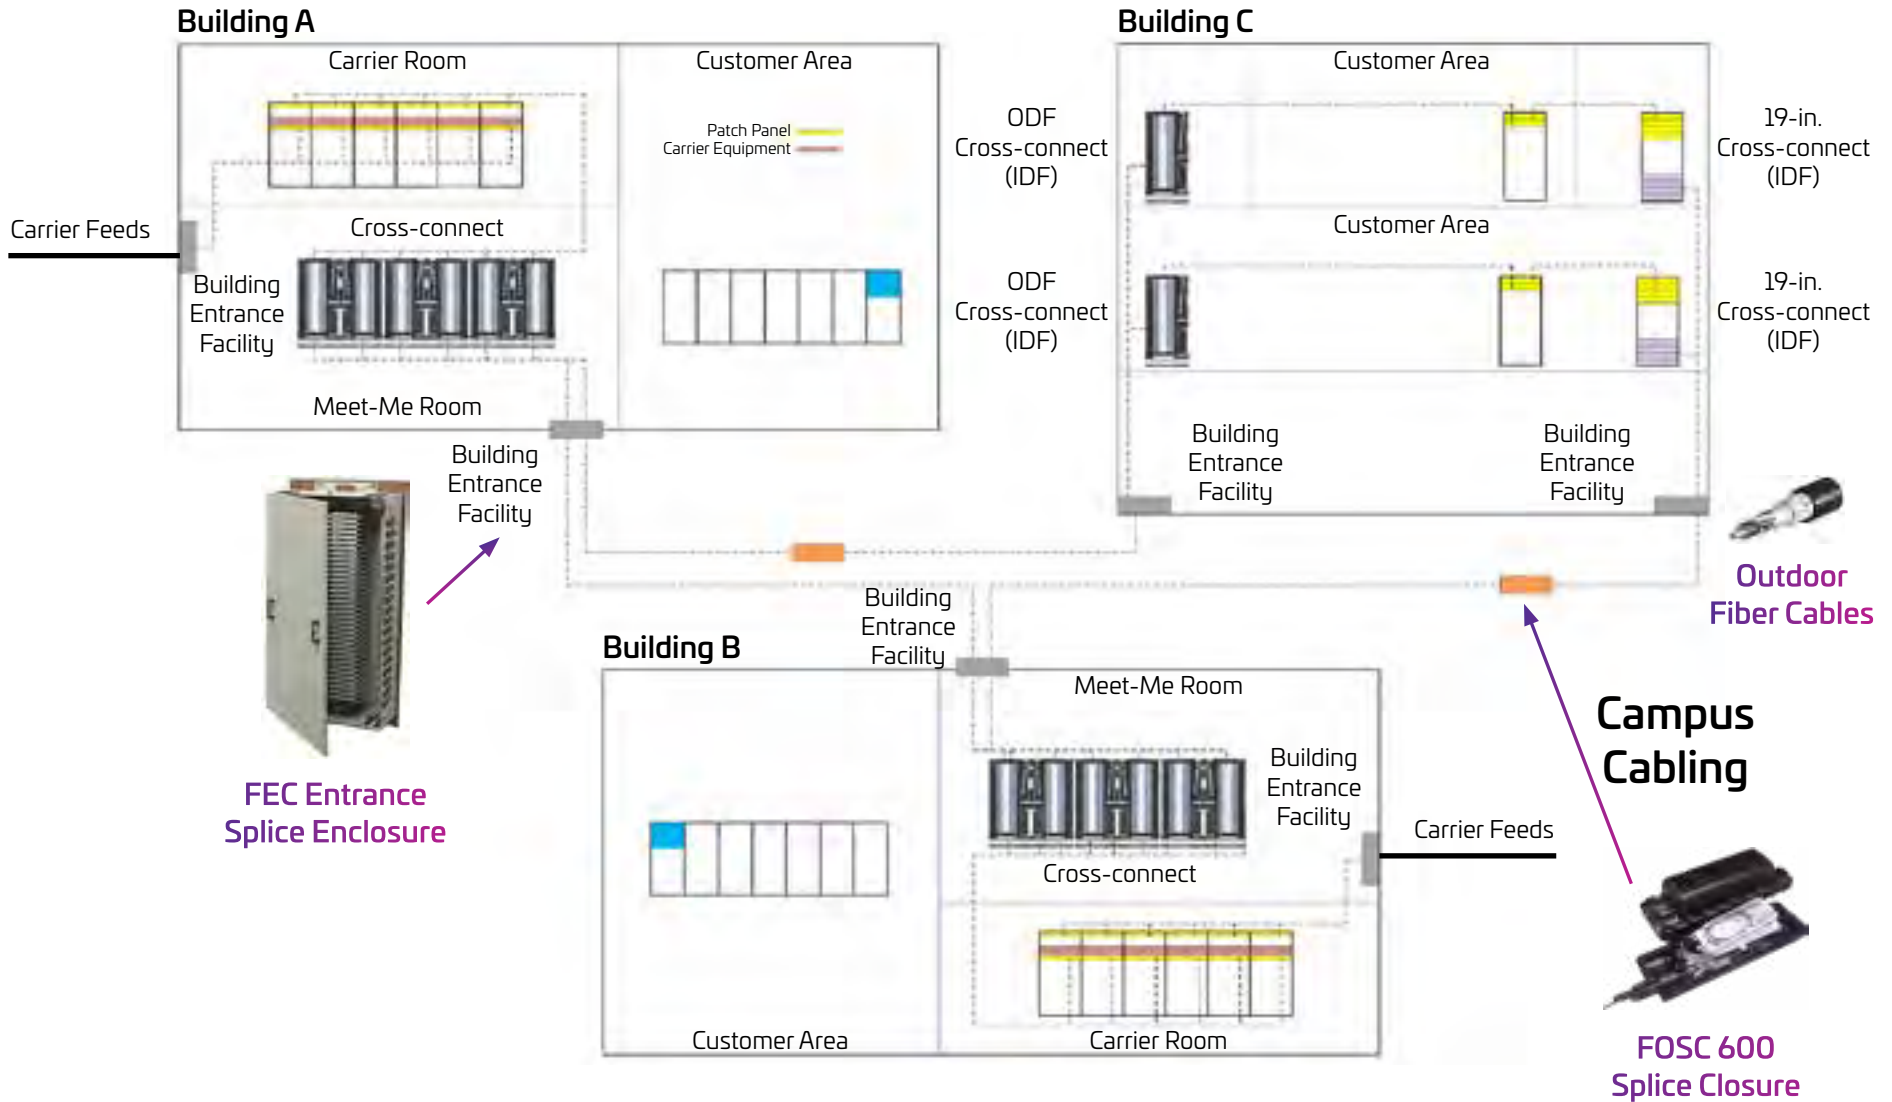

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------


Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



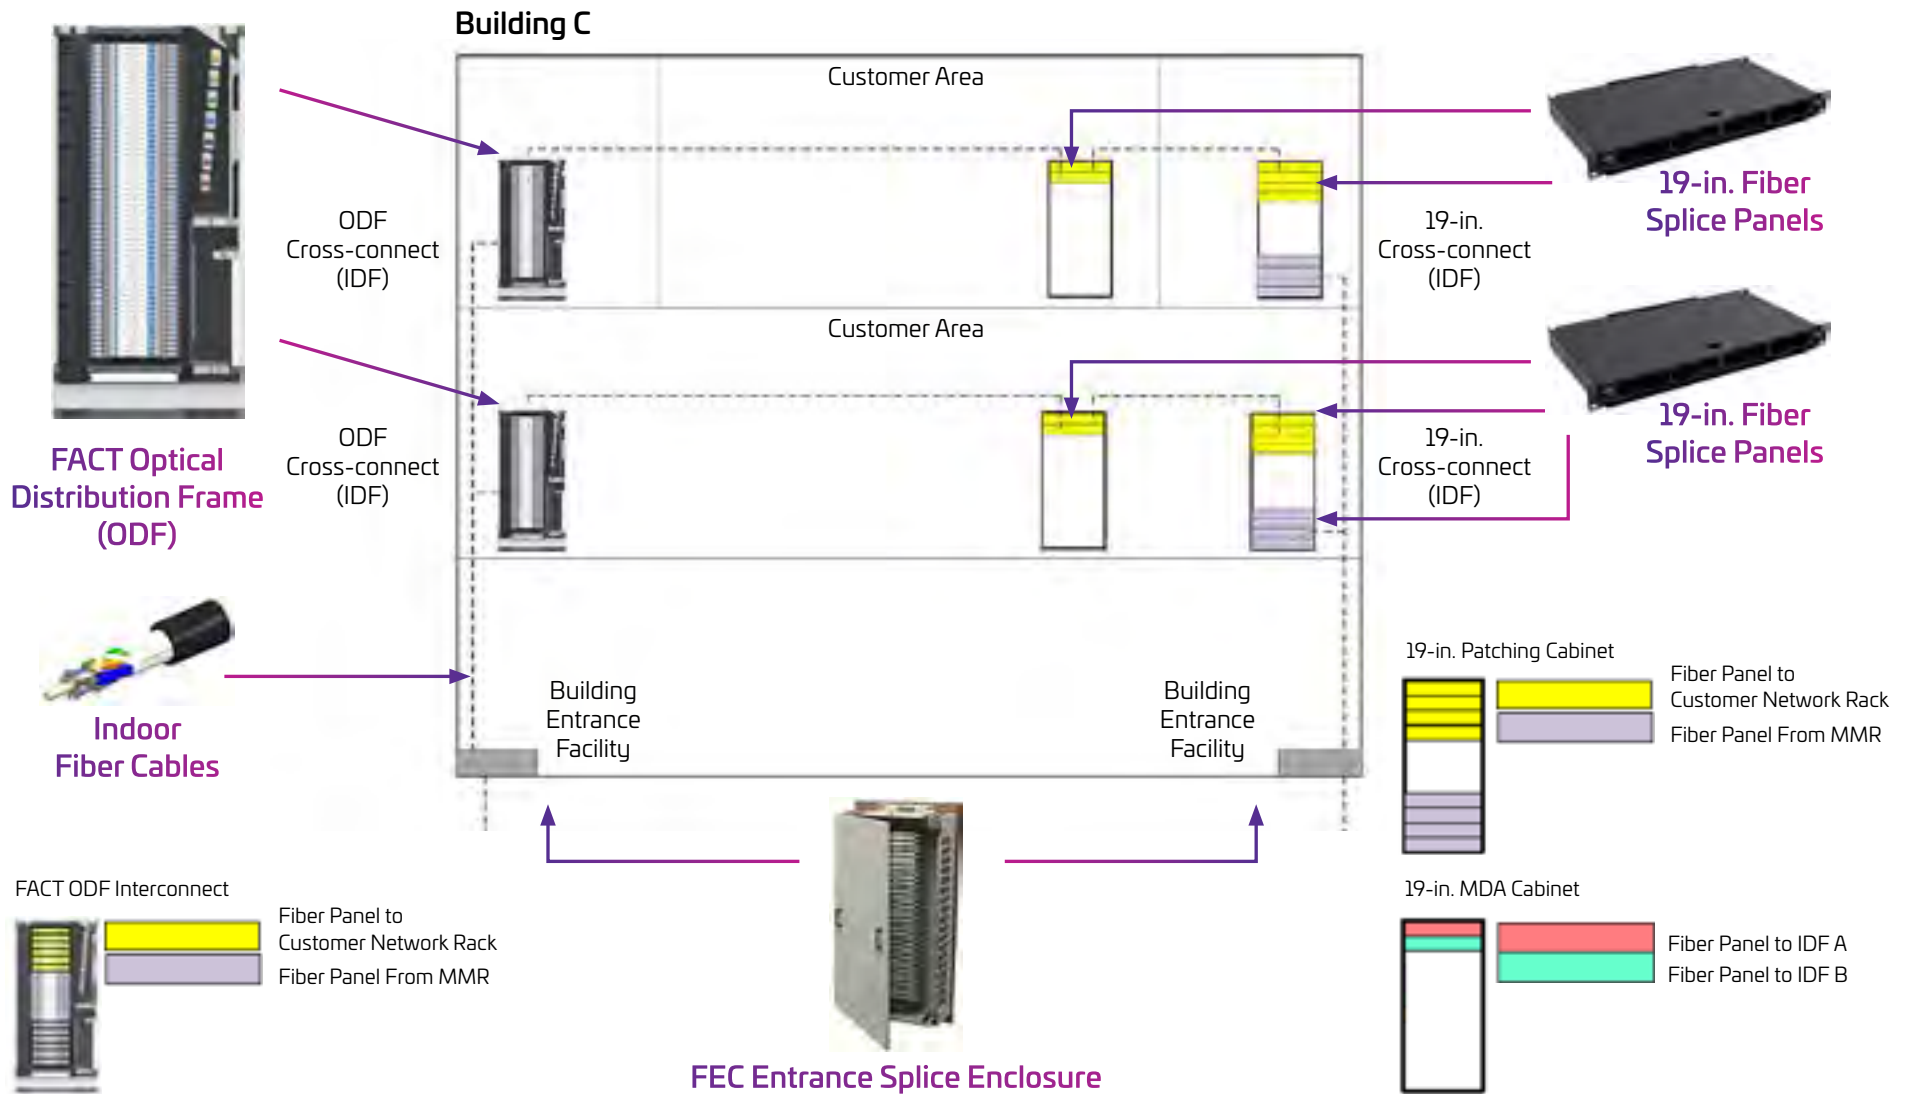

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------


Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----




Select a product for more information.

FACT IDF to Customer Cage: Splice Scenario

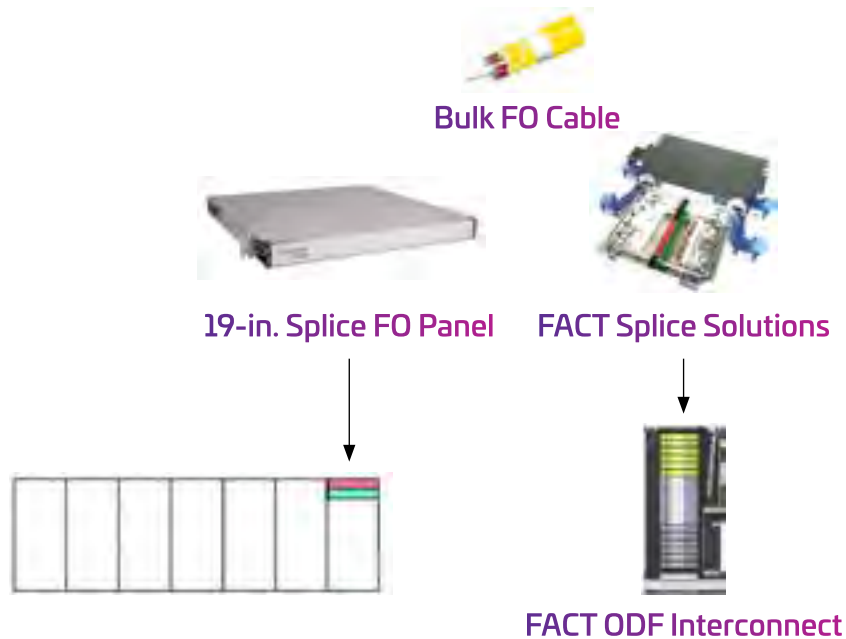

FACT IDF to Customer Cage: MPO Pre-terminated Scenario

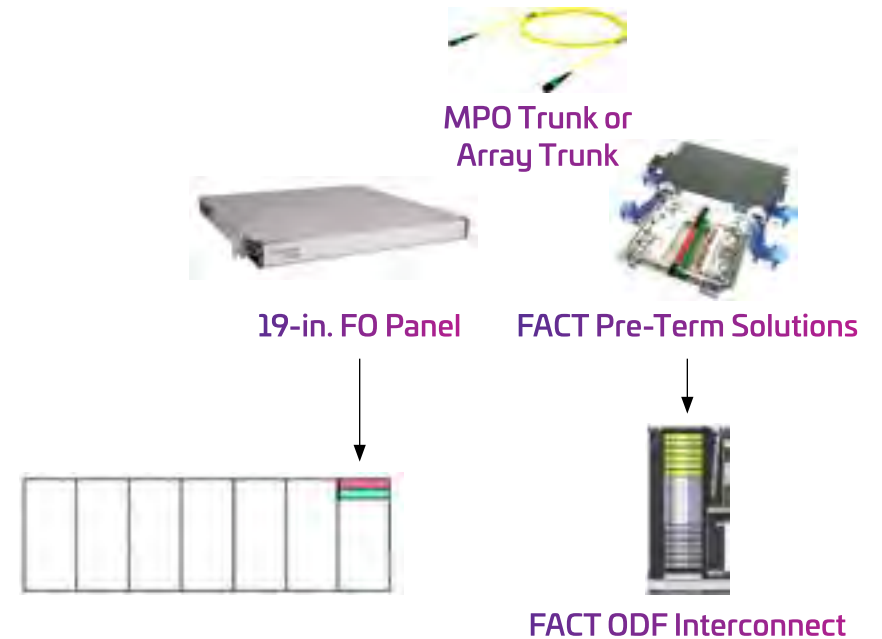

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------


Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----




Select a product for more information.

19-in. IDF to Customer Cage: Splice Scenario

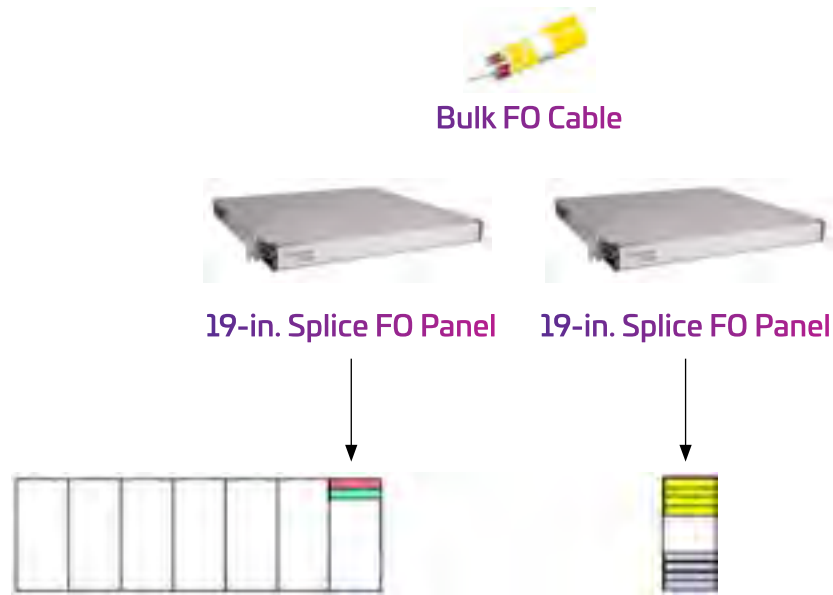

19-in. IDF to Customer Cage: MPO Pre-terminated Scenario

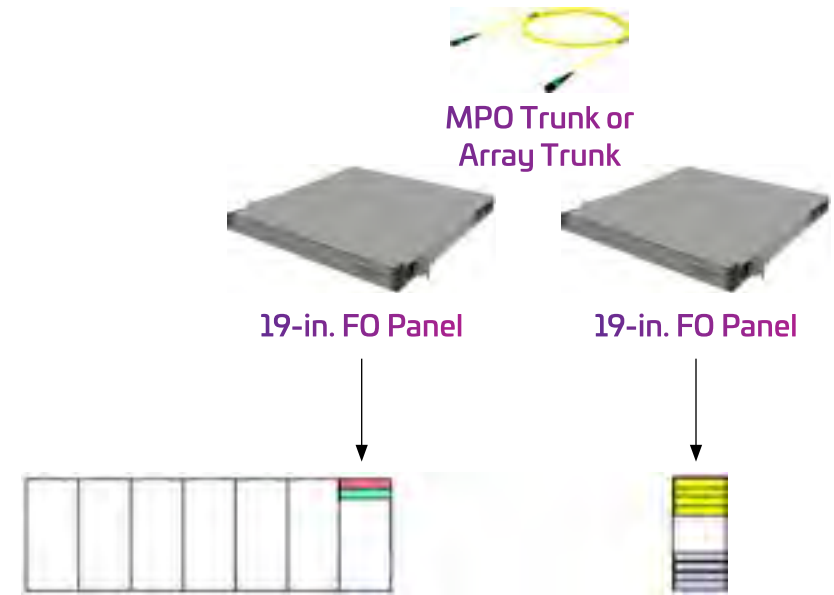

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure


MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Select a product for more information.

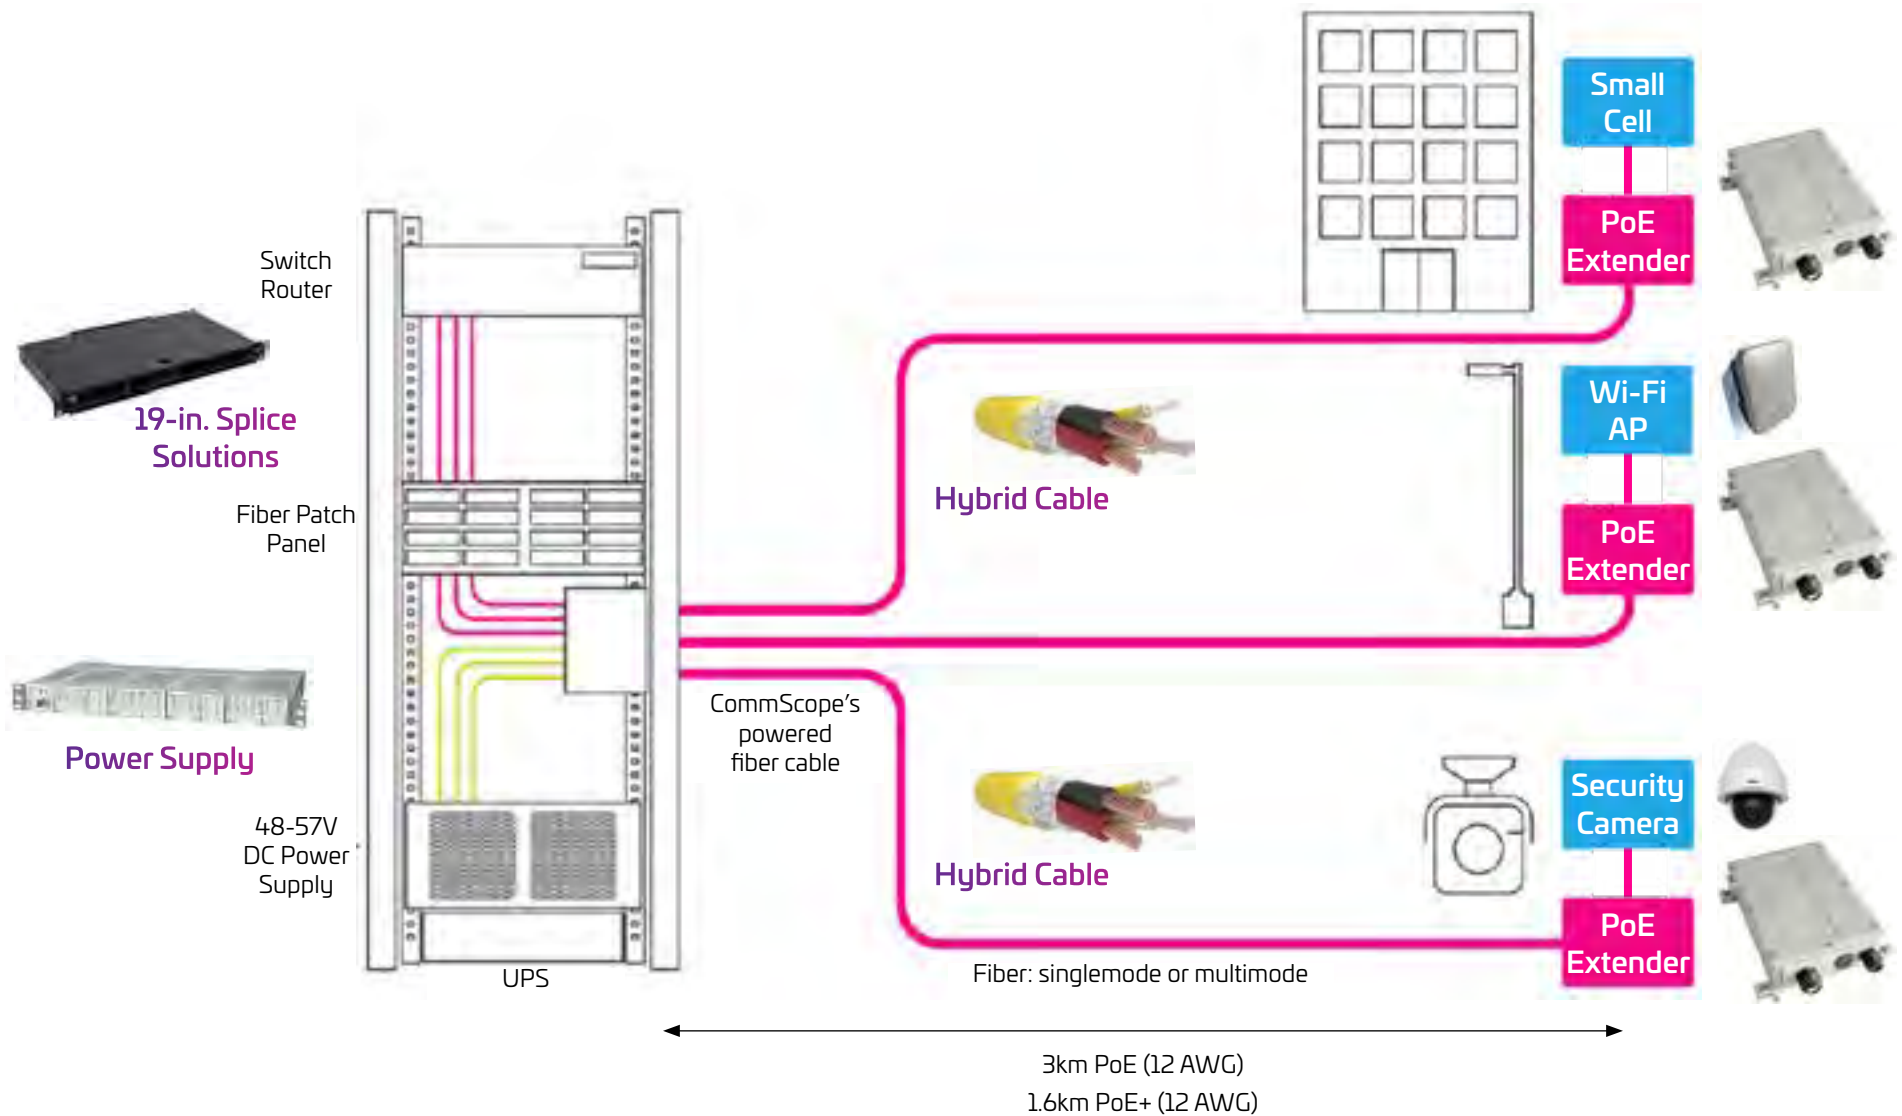

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information



MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Customer Space Cabling Infrastructure

Main Distribution Area (MDA) Fiber
Equipment Distribution Area (EDA) Fiber
Equipment Distribution Area (EDA) Copper
FiberGuide Raceway Systems



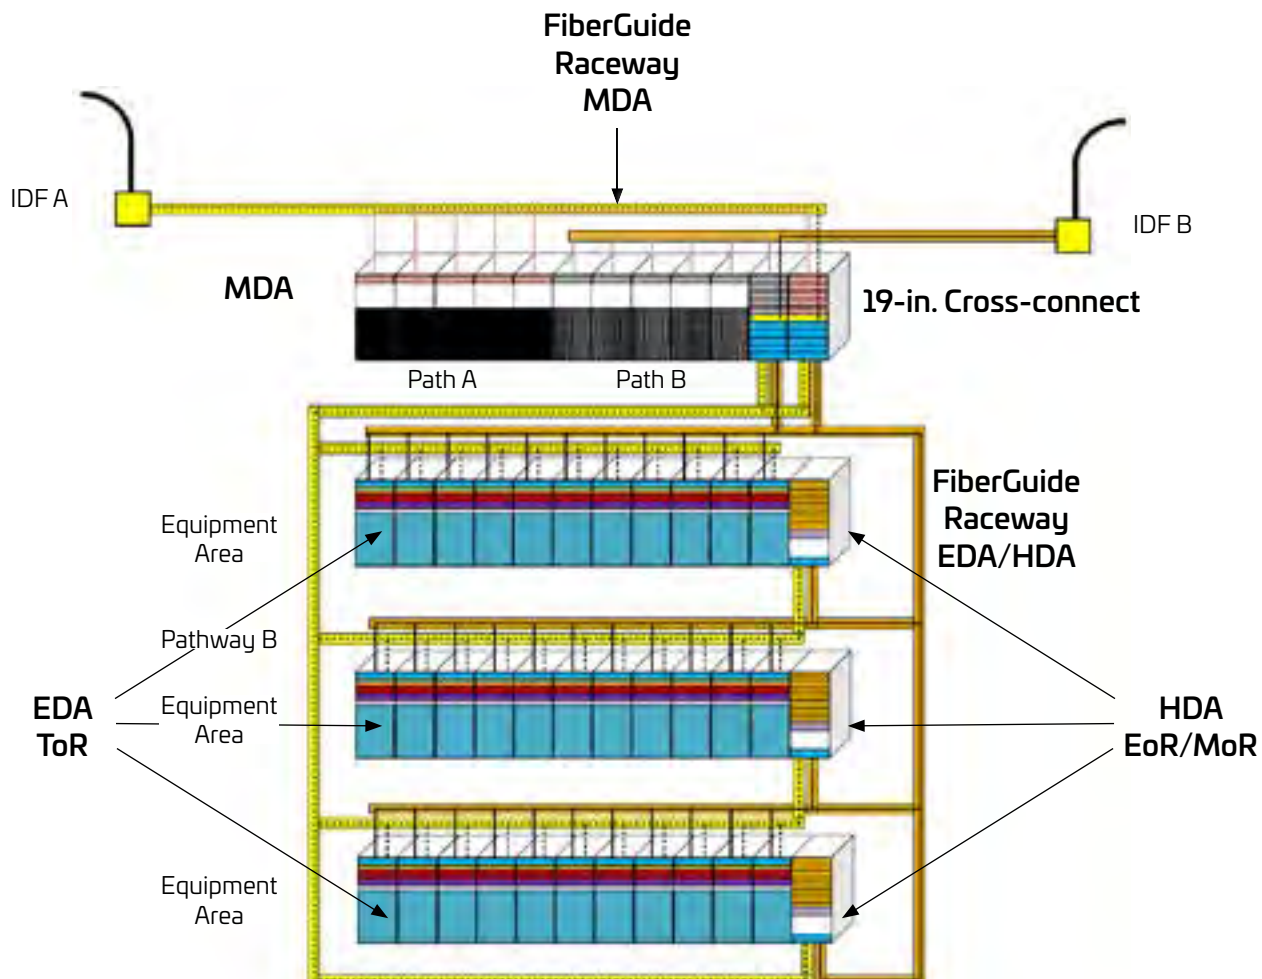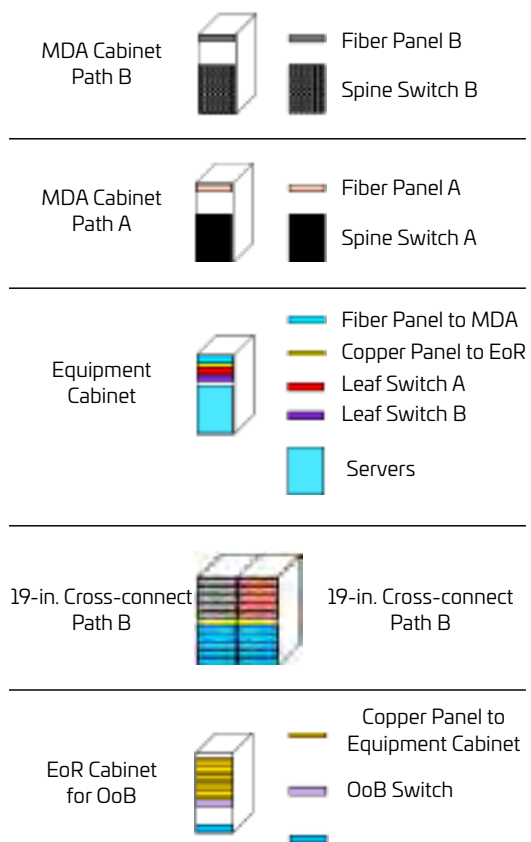

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure


MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information


MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----

Select a product for more information.

MDA Cabling Channel 19-in. XC

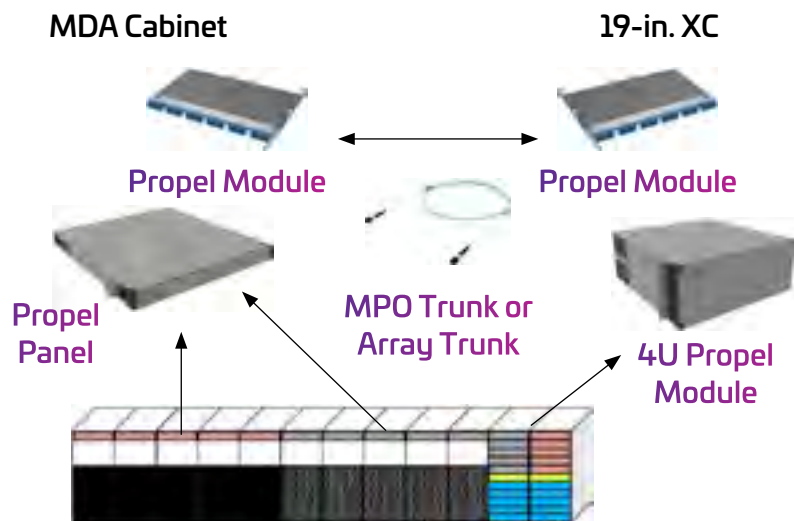

MDA Cabling Channel ODF XC

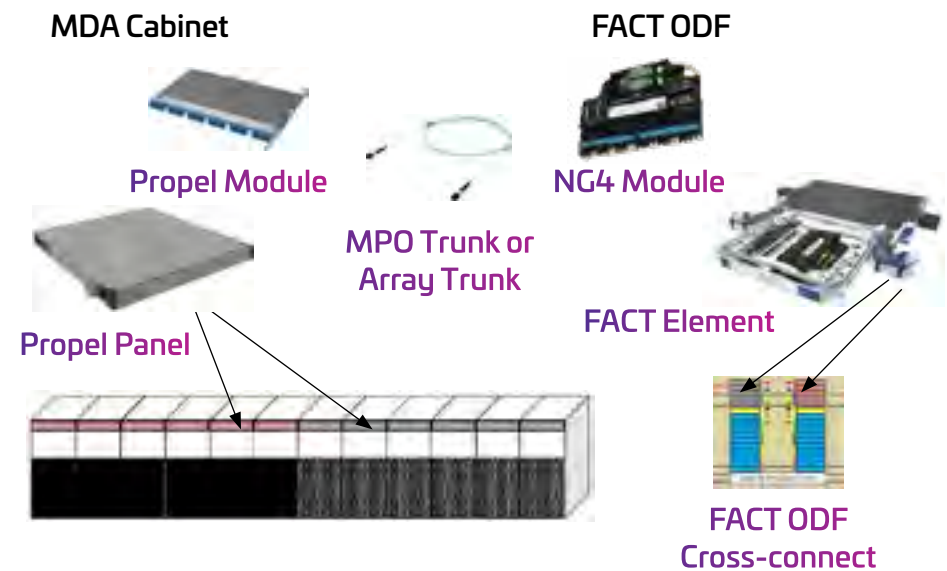

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Select a product for more information.

Equipment Cabinet

- Fiber Panel to MDA
- Copper Panel to EoR
- Leaf Switch A
- Leaf Switch B
- Servers

Propel Panel

Propel Module 19-in. XC

FACT ULL Module

FACT ULL Module

FACT Element

FACT Element

FACT ODF Cross-connect

FACT ODF Cross-connect

EPX Fiber Panel
OoB Copper Panel
ToR Switch Path A
ToR Switch Path B

Fiber Basic

HD-1U Fiber Panel
OoB Copper Panel
ToR Switch Path A
ToR Switch Path B

Fiber HD

Propel 1U Fiber Panel
OoB Copper Panel
ToR Switch Path A
ToR Switch Path B

Propel

Mixed Media Panel
ToR Switch Path A
ToR Switch Path B

Mixed Media Basic

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------



Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



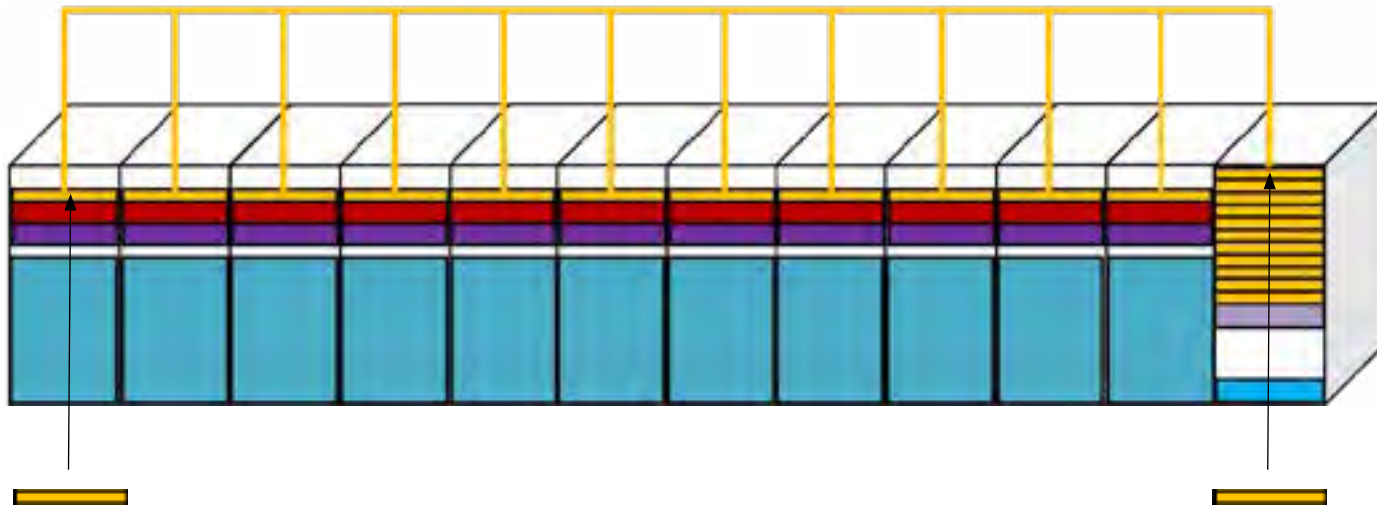

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------


Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



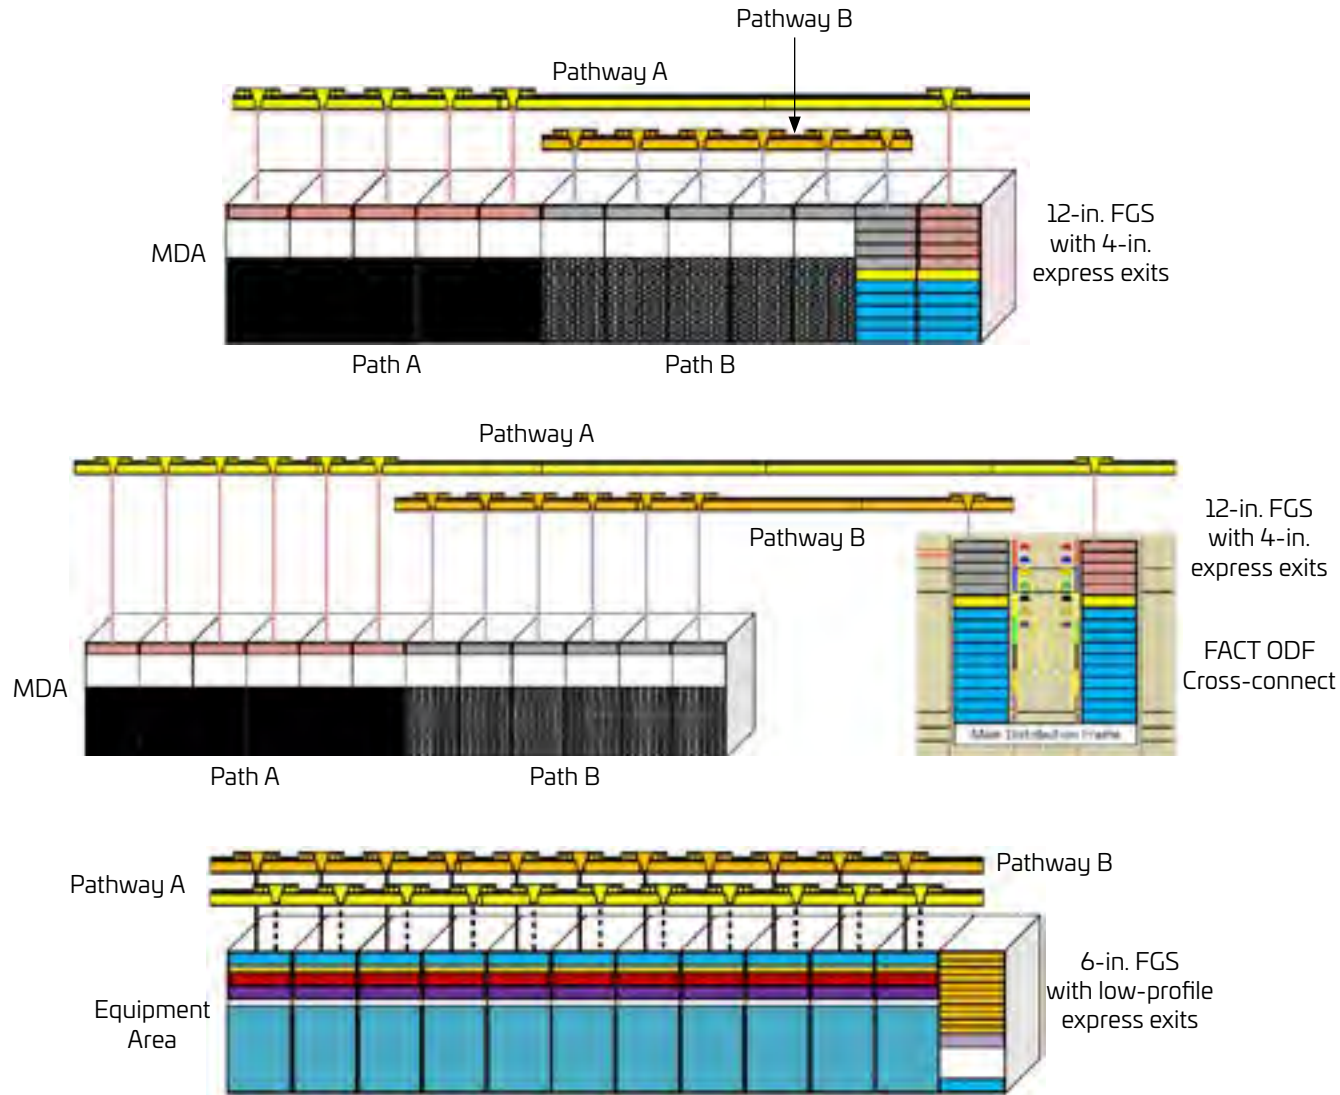

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Reference Designs and Technical Information

MDA Cabinet

MDA Cross-connect 19-in.


MDA Cross-connect FACT ODF

IDF FACT

IDF 19-in.

Fiber Entrance Cabinet (FEC)



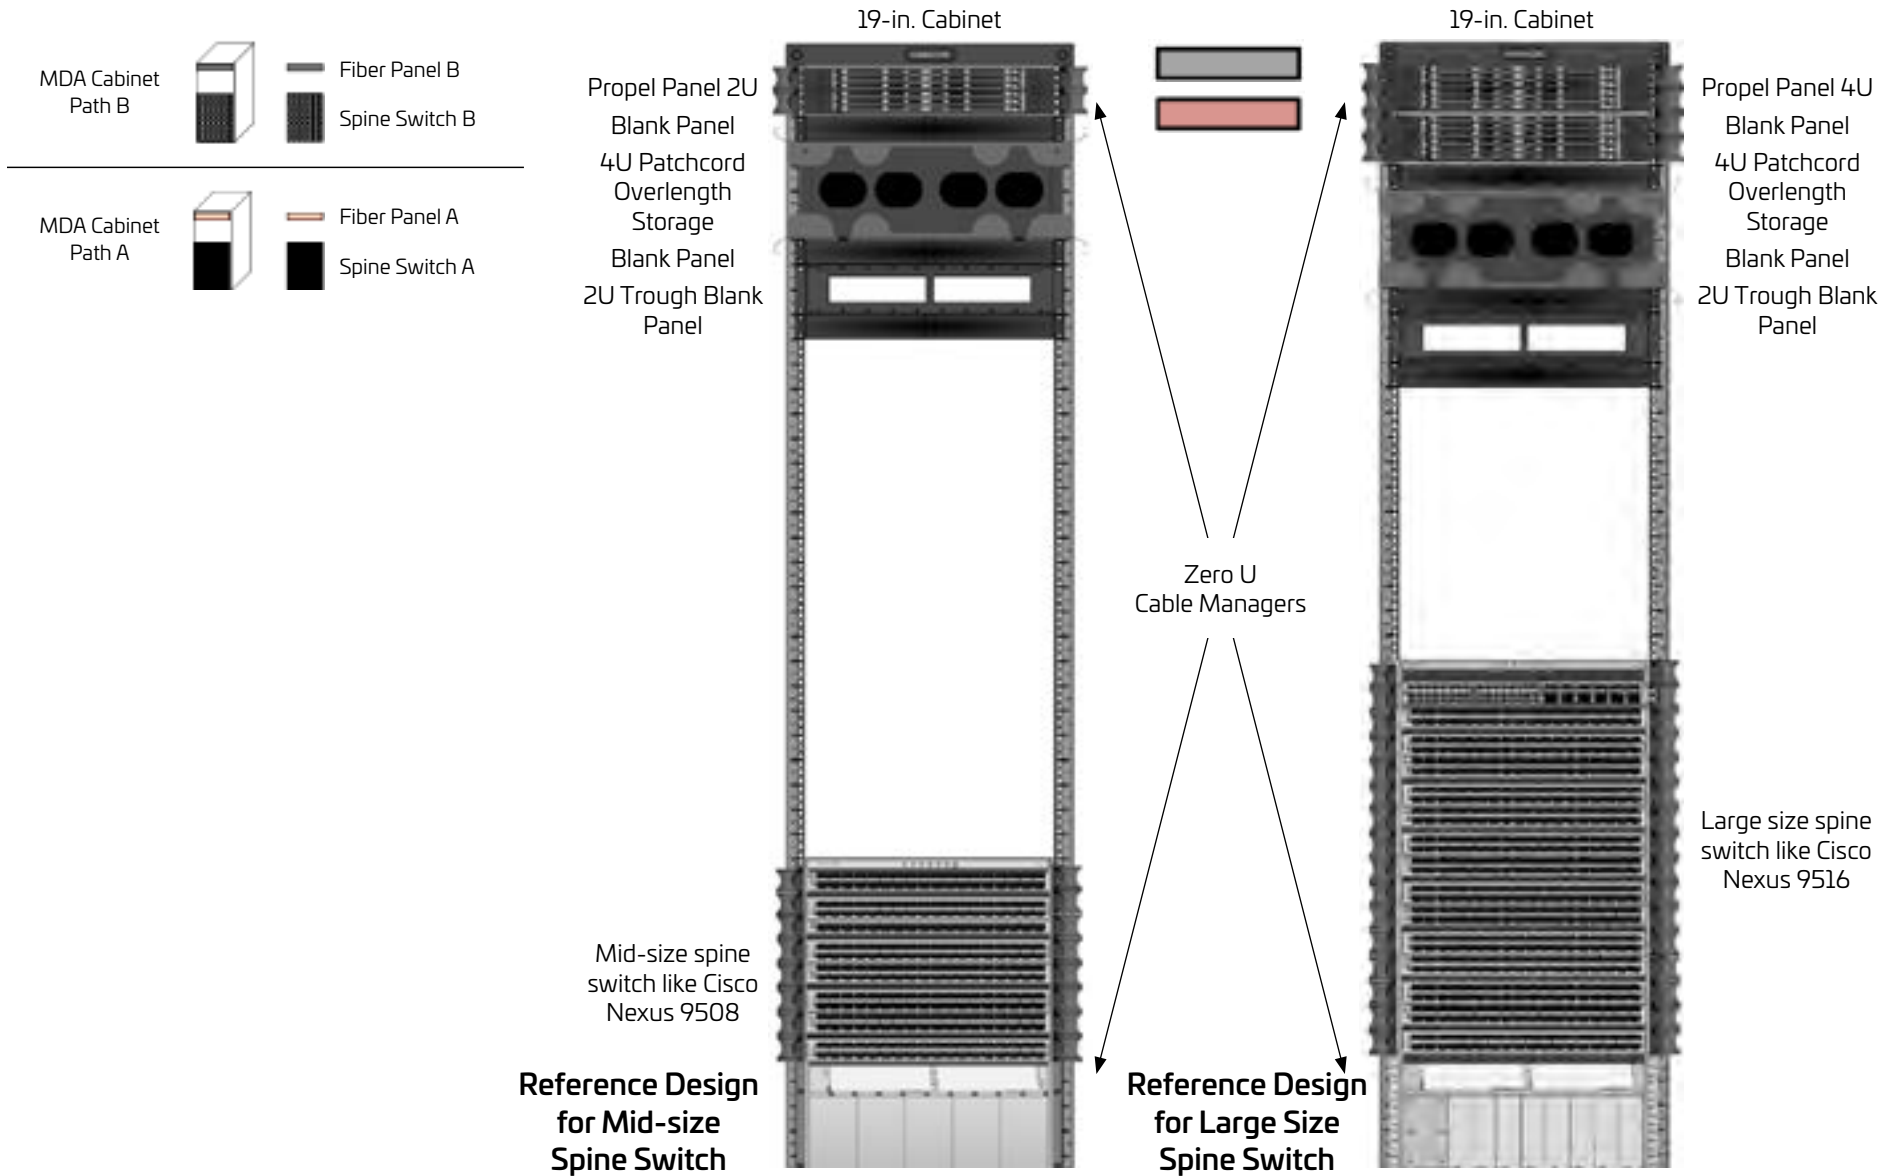

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



19-in. Cross-connect Path B



19-in. Cross-connect Path B

19-in. Cabinet

3 x Propel Panels 4U
Patch Section 1

Blank Panel
Overlength Storage 4U
Blank Panel

3 x Propel Panels 4U
Patch Section 2

Blank Panel
Overlength Storage 4U
Blank Panel

Cable Trough 2U to guide patch cords to adjacent cabinets



19-in. Cabinet

3 x Propel Panels 4U
Patch Section 1

Blank Panel
Overlength Storage 4U
Blank Panel

3 x Propel Panels 4U
Patch Section 2

Blank Panel
Overlength Storage 4U
Blank Panel

Cable Trough 2U to guide patch cords to adjacent cabinets



Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	---------------------------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------


Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



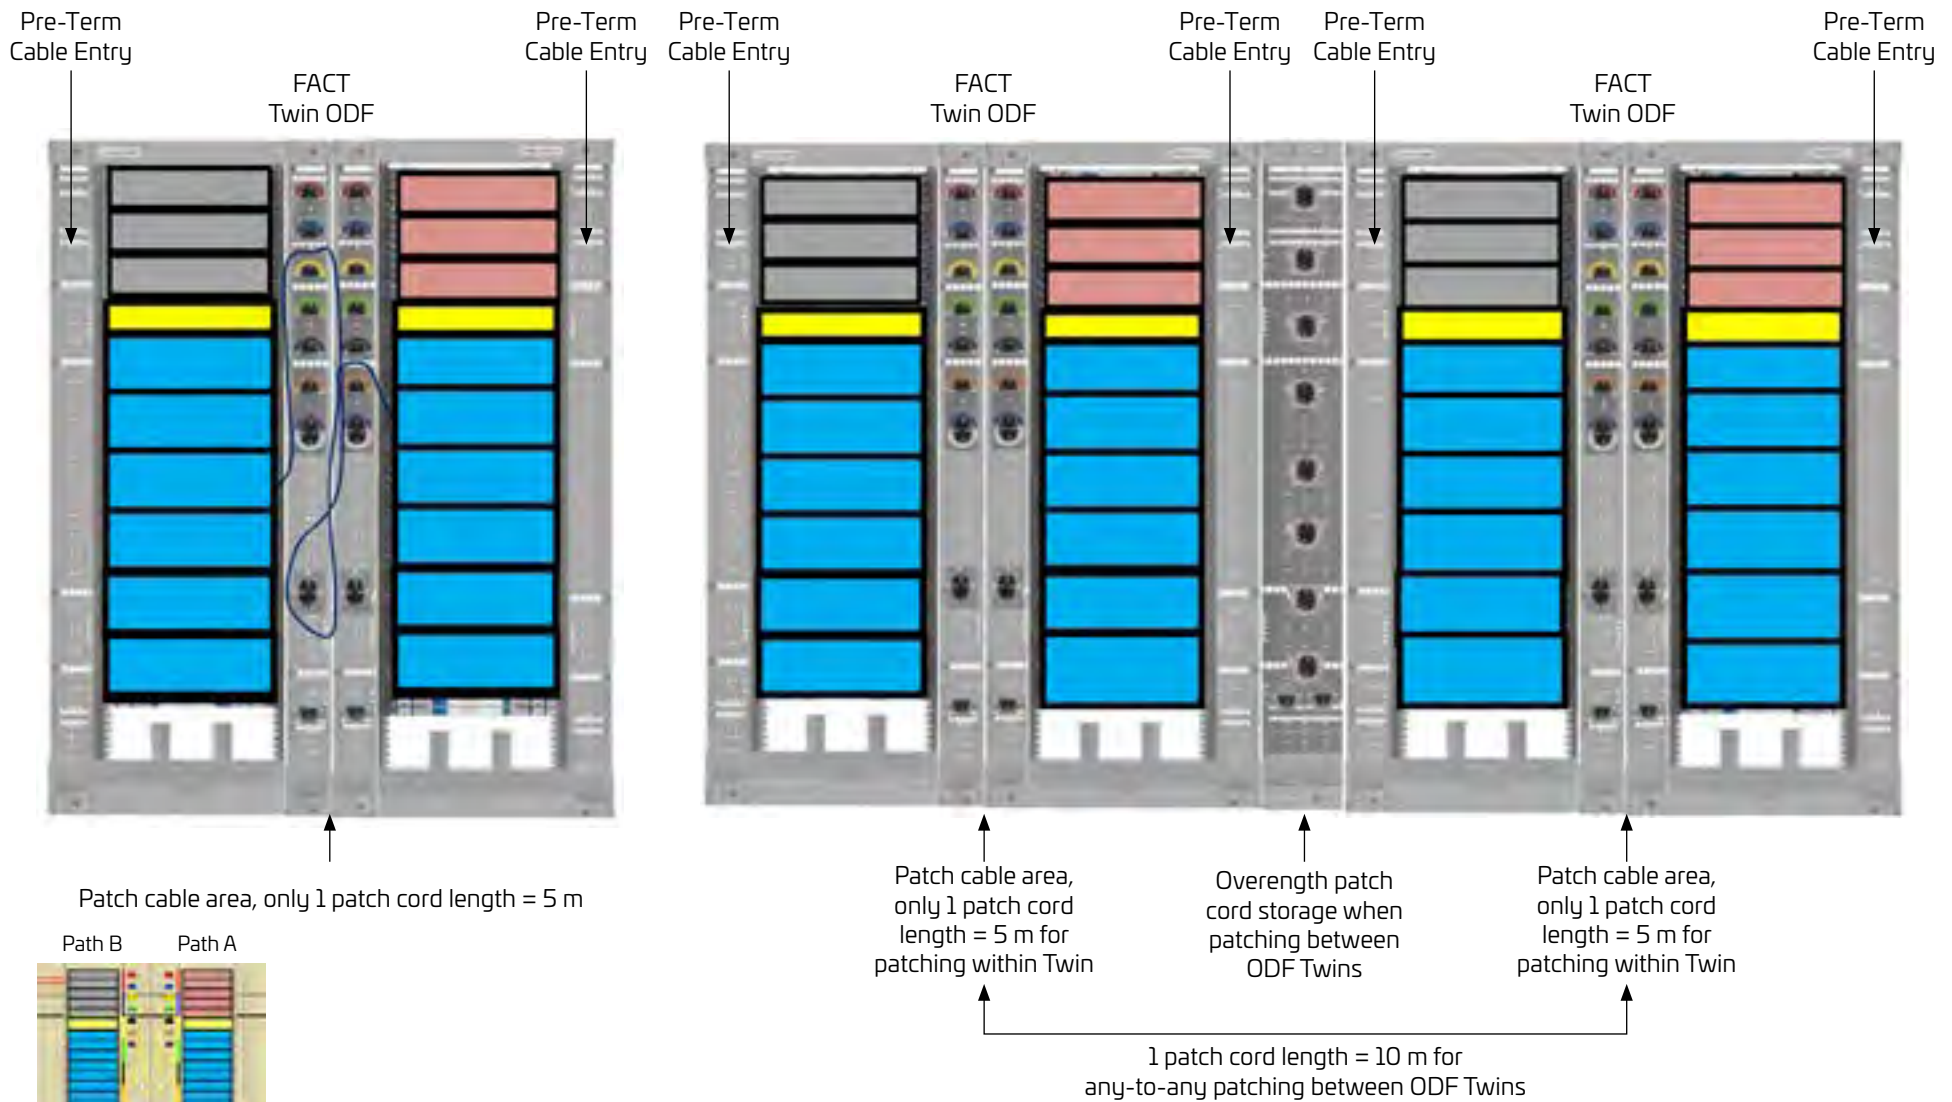

Note: The XC can consist of more than 4 cabinets depending on the DC size.

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure


MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Pre-Term Cable Entry
IDF B

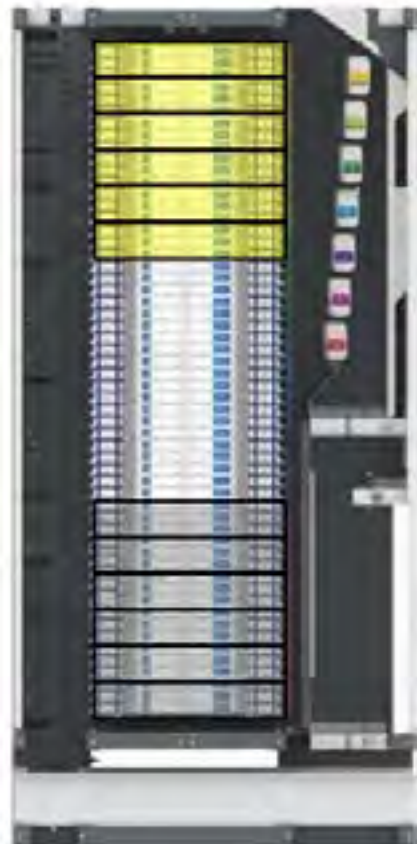

FACT Elements
(to Customer Cage)

FACT Elements
from MMR
(to Customer Cage)

FACT Elements
(from MMR)

FACT Elements
from MMR
(from MMR)

Patch Cable Area,
Only 1 Patch Cord
Length = 5 m

Pre-Term Cable Entry
IDF A



Patch Cable Area,
Only 1 Patch Cord
Length = 5 m

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------



Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



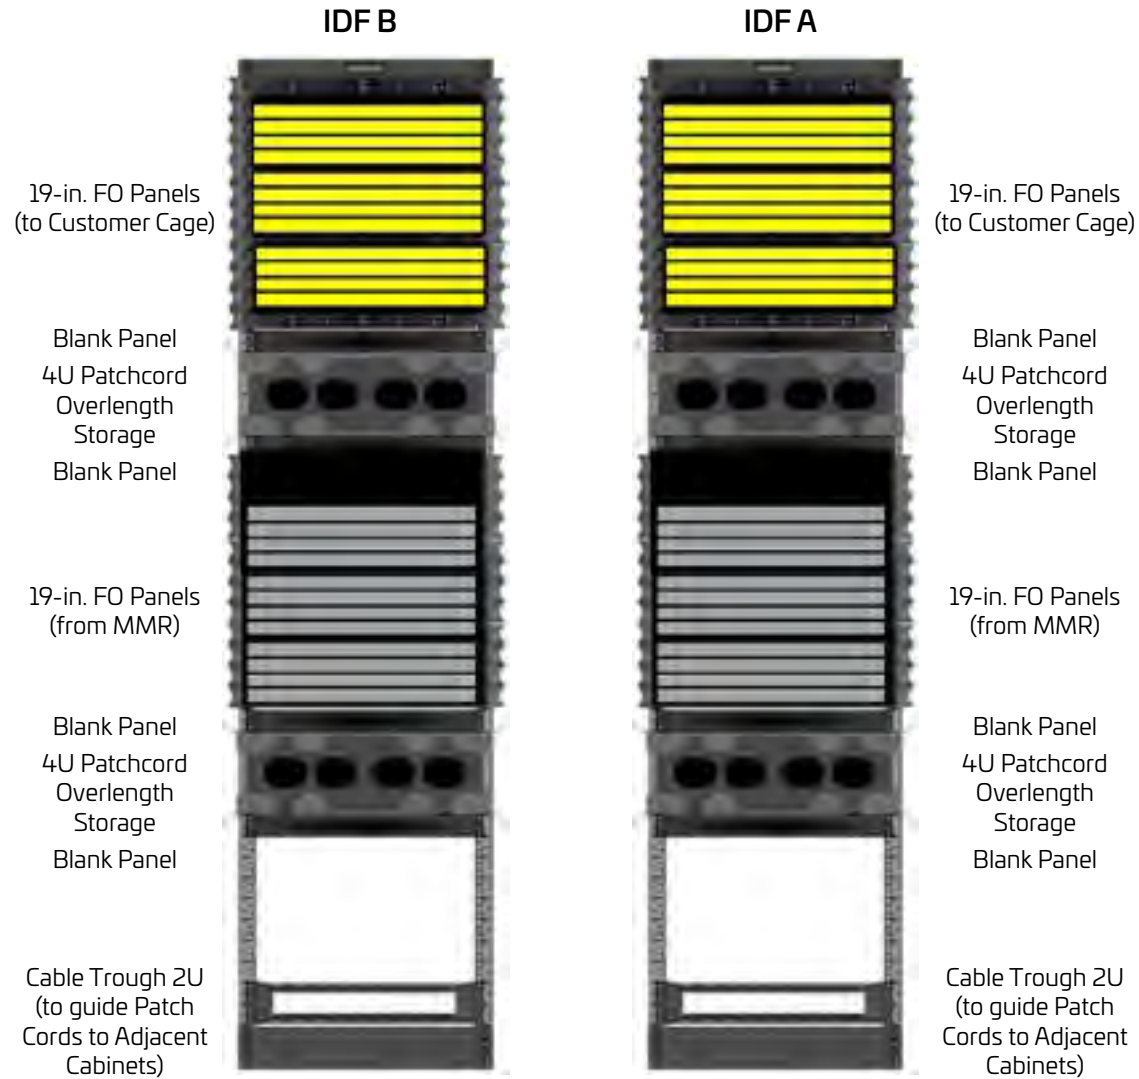

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure


MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



Review the User Manual [here](#).

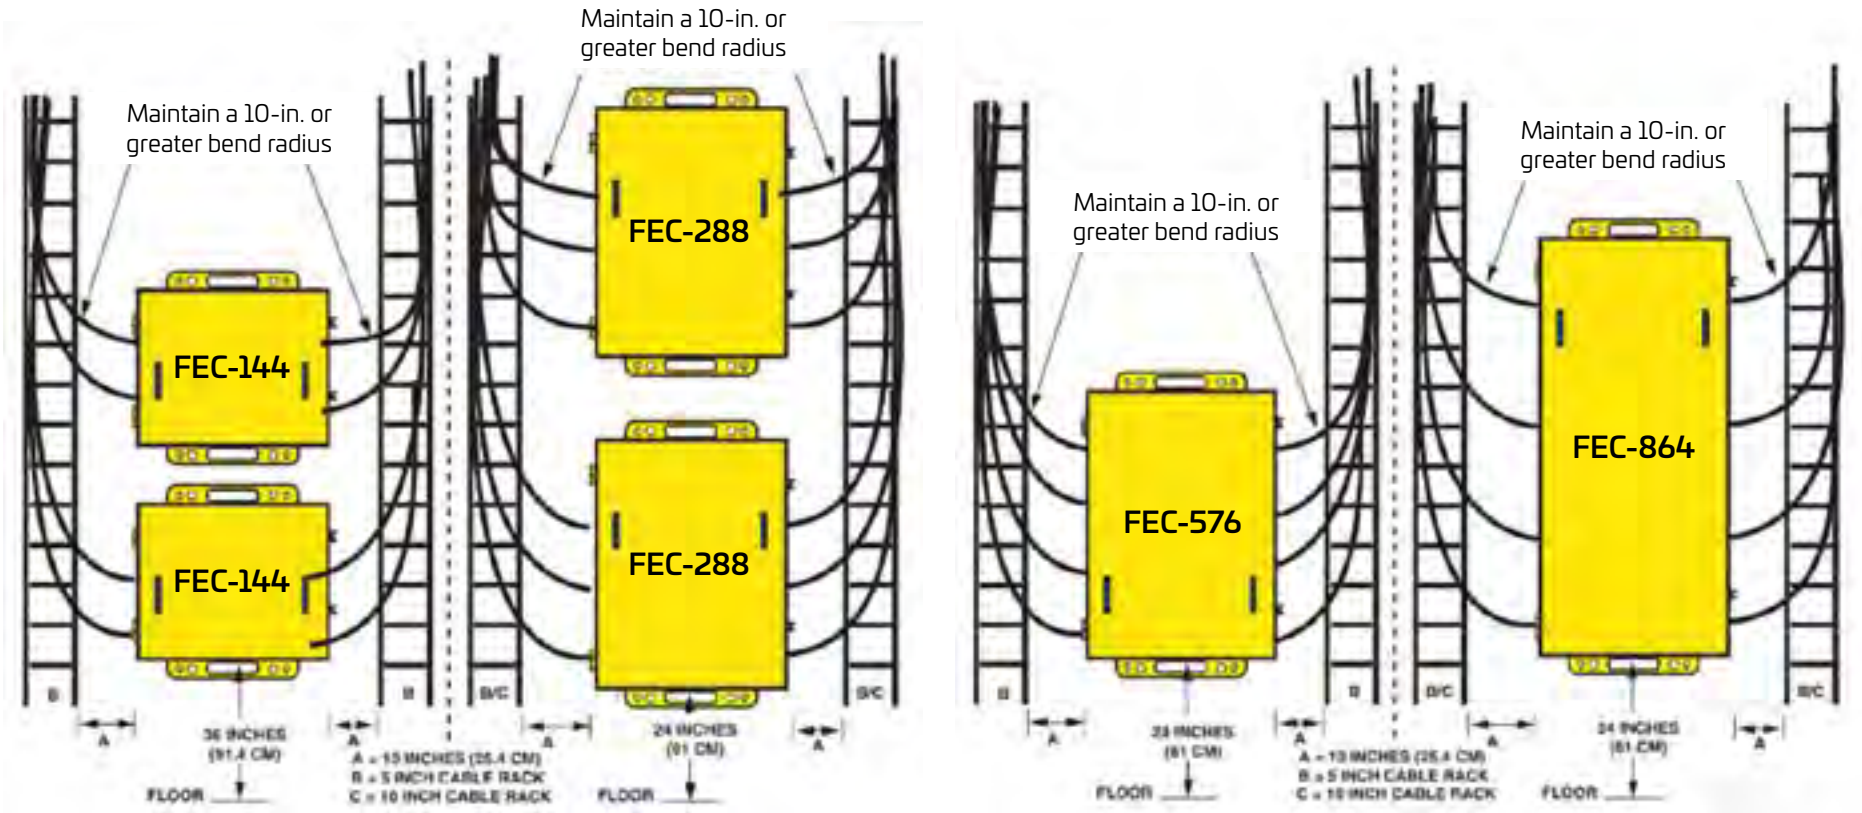

Direct System Selection Index

FEC	FACT ODF	UMSC	Flex Frame ODF, 19-in. Propel Panels	FOSC 600	19-in. Splice Solutions	Singlemode Fiber Cables	Singlemode Patch Cord, Cable Mgmt Products	Pre-term 19-in. Fiber	Pre-term FACT ODF Fiber	FiberGuide	Copper Category 6A	Powered Fiber	DIN Rail Solutions	Fiber Wall Boxes	2 Post Equipment Racks	imVision®
-----	----------	------	--------------------------------------	----------	-------------------------	-------------------------	--	-----------------------	-------------------------	------------	--------------------	---------------	--------------------	------------------	------------------------	-----------

Architecture System Selection Index

Colocation Campus and Building Infrastructure

Fiber Entrance, Meet-Me Room	High Fiber Count DC Interconnect	Campus Cabling	Building Cabling	Campus Cabling for Wi-Fi and Security
------------------------------	----------------------------------	----------------	------------------	---------------------------------------

Customer Space Cabling Infrastructure

MDA Fiber	EDA Fiber	EDA Copper	FiberGuide Raceway
-----------	-----------	------------	--------------------

Reference Designs and Technical Information

MDA Cabinet	MDA Cross-connect 19-in.	MDA Cross-connect FACT ODF	IDF FACT	IDF 19-in.	FEC
-------------	--------------------------	----------------------------	----------	------------	-----



CommScope pushes the boundaries of communications technology with game-changing ideas and ground-breaking discoveries that spark profound human achievement. We collaborate with our customers and partners to design, create and build the world's most advanced networks. It is our passion and commitment to identify the next opportunity and realize a better tomorrow. Discover more at commscope.com.

COMMSCOPE®

commscope.com

Visit our website or contact your local CommScope representative for more information.

© 2023 CommScope, Inc. All rights reserved.

All trademarks identified by ™ or ® are trademarks or registered trademarks in the US and may be registered in other countries. All product names, trademarks and registered trademarks are property of their respective owners. This document is for planning purposes only and is not intended to modify or supplement any specifications or warranties relating to CommScope products or services. CommScope is committed to the highest standards of business integrity and environmental sustainability, with a number of CommScope's facilities across the globe certified in accordance with international standards, including ISO 9001, TL 9000, and ISO 14001. Further information regarding CommScope's commitment can be found at www.commscope.com/About-Us/Corporate-Responsibility-and-Sustainability.

CO-116968.1-EN (12/23)

